

2024
Rhode Island Pollutant Discharge Elimination System
Remediation General Permit



Effective Date: July 1, 2024

Expiration Date: June 30, 2029

Rhode Island Department of Environmental Management
Office of Water Resources
RIPDES Program

**AUTHORIZATION TO DISCHARGE UNDER THE
RHODE ISLAND POLLUTANT DISCHARGE ELIMINATION SYSTEM**

REMEDIATION GENERAL PERMIT

In compliance with the provisions of Chapter 46-12 of the Rhode Island general Laws, as amended, except as provided in Part I.A.3 of the permit, owners and operators of discharges associated with remediation projects located in the State of Rhode Island are authorized to discharge in accordance with the conditions and requirements set forth herein.


Owners and operators of discharges associated with remediation projects who intend to be authorized by this general permit must meet the application requirements outlined in Part I.B of the permit. Authorization to discharge shall be granted in accordance with Part I.B.2 of this permit. Owners and operators of discharges from remediation projects that fail to submit a Notice of Intent in accordance with Part I.B of this permit are not authorized to discharge under this permit.

This general permit shall become effective on July 1, 2024.

The general permit and the authorization to discharge expire at midnight, five years from the effective date, or June 30, 2029.

This permit supersedes the general permit issued on April 23, 2019.

Signed this 27th day of June 2024.

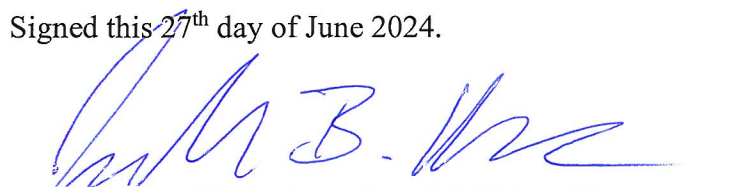

Joseph B. Haberek, P.E.
Administrator of Surface Water Protection
Office of Water Resources
Rhode Island Department of Environmental Management
Providence, Rhode Island

Table of Contents

I	Permit Applicability	5
A.	Applicability and Coverage of the Remediation General Permit (RGP)	
1.	Permit Area	5
2.	Eligibility	5
3.	Limitations of Coverage	6
B.	Application and Notice of Intent	
1.	Definition of "Owner" & "Operator"	6
2.	Authorization	6
3.	Deadlines for Requesting Authorization.....	7
4.	Signature.....	7
5.	Termination of Coverage.....	7
6.	Failure to Notify.....	7
7.	Continuation of the General Permit After Expiration.....	7
II	Permit Conditions	8
A.	Effluent Limitations and Monitoring Requirements	
1.	General Effluent Limitations and Monitoring Requirements	8
2.	Water Quality Requirements	8
3.	Prohibition of Toxic Discharge	8
4.	Effluent Limits.....	8
5.	Consideration of Dilution Factors for Discharges of Metals.....	8
6.	Specific Pollutants to be Monitored for Individual Sub-Categories.....	8
7.	Operations and Maintenance Requirements.....	9
8.	Flow Monitoring.....	10
9.	Conditions for Discharges of Chemicals and Additives.....	10
10.	Additional Permit Requirements.....	10
11.	Emerging Contaminants.....	11
B.	Sampling, Testing, Recordkeeping, and Reporting Requirements	
1.	Sampling and Testing.....	11
2.	Initial Treatment System Discharge Startup.....	11
3.	Recordkeeping Requirements.....	12
4.	Monitoring and Reporting.....	12
5.	Extended System Shutdown.....	14
6.	Short-term Discharges.....	14
7.	Hydrostatic Testing and Discharge Monitoring and Reporting Requirements.....	14
C.	Special RIPDES Permit Conditions.....	15
D.	Effluent Limitations and Monitoring Requirements	
1.	Discharge Category A-Gasoline Remediation Sites Discharging to Class AA receiving waters.	16
2.	Discharge Category A-Gasoline Remediation Sites Discharging to freshwater Non-Class AA Waters.....	17
3.	Discharge Category A-Gasoline Remediation Sites Discharging to saltwater Waters.....	18
4.	Discharge Category B-Oil Remediation Sites Discharging to Class AA receiving waters.....	19
5.	Discharge Category B-Oil Remediation Sites Discharging to freshwater Non-Class AA receiving waters.....	21
6.	Discharge Category B-Oil Remediation Sites Discharging to saltwater receiving waters.....	23
7.	Discharge Category C-Petroleum Sites Containing Other Pollutants Discharging to Class AA receiving waters.....	25
8.	Discharge Category C-Petroleum Sites Containing Other Pollutants Discharging to freshwater Non-Class AA receiving Non-Class AA receiving.....	28
9.	Discharge Category C-Petroleum Sites Containing Other Pollutants Discharging to saltwater receiving waters.....	31
10.	Discharge Category D-Sites Containing Volatile Organic Compound Only Discharging to Class AA receiving waters.....	34
11.	Discharge Category D-Sites Containing Volatile Organic Compound Only Discharging to freshwater Non-Class AA receiving waters.....	35
12.	Discharge Category D-Sites Containing Volatile Organic Compound Only Discharging to saltwater receiving waters.....	36

13. Discharge Category E-Sites Containing Volatile Organic Compounds and Other Contaminants Discharging to Class AA receiving waters.....	37
14. Discharge Category E-Sites Containing Volatile Organic Compounds and Other Contaminants Discharging to freshwater Non-Class AA receiving waters.....	40
15. Discharge Category E-Sites Containing Volatile Organic Compounds and Other Contaminants Discharging to saltwater receiving waters.....	43
16. Discharge Category F–Sites Containing Primarily Metals Discharging to Class AA receiving waters.....	46
17. Discharge Category F-Sites Containing Primarily Metals Discharging to freshwater Non-Class AA receiving waters.....	48
18. Discharge Category F-Sites Containing Primarily Metals Discharging to saltwater receiving waters.....	50
19. Category G-Contaminated Construction Dewatering Sites Discharging to Class AA receiving waters.....	52
20. Category G-Contaminated Construction Dewatering Sites Discharging to freshwater Non-Class AA receiving waters.....	55
21. Category G-Contaminated Construction Dewatering Sites Discharging to saltwater receiving waters.....	58
22. Category H-Sites Engaged in Contaminated Aquifer Pump Testing, Contaminated Well Development or Rehabilitation Discharging to Class AA receiving waters.....	61
23. Category H-Sites Engaged in Contaminated Aquifer Pump Testing, Contaminated Well Development or Rehabilitation Discharging to freshwater Non-Class AA receiving waters.....	64
24. Category H-Sites Engaged in Contaminated Aquifer Pump Testing, Contaminated Well Development or Rehabilitation Discharging to saltwater receiving waters.....	67
25. Category I-Hydrostatic Testing of Pipelines and Tanks Discharging to Class AA receiving waters.....	70
26. Category I-Hydrostatic Testing of Pipelines and Tanks Discharging to freshwater Non-Class AA receiving waters.....	71
27. Category I-Hydrostatic Testing of Pipelines and Tanks Discharging to saltwater receiving waters.....	72
28. Category J-Contaminated Sumps Discharging to Class AA receiving waters.....	73
29. Category J-Contaminated Sumps Discharging to freshwater Non-Class AA receiving waters.....	76
30. Category J-Contaminated Sumps Discharging to saltwater receiving waters.....	79
E. Metals Effluent Limitations.....	82
F. Notice of Intent Requirements	
1. Owner	84
2. Operator	84
3. Site Information	84
4. Treatment System Information.....	85
5. Receiving Water Information	86
6. Influent Characterization.....	86
7. Additional Information.....	86
8. Owner/Operator Certification.....	86
9. How to Submit.....	86
10. Deficient NOI.....	87
G. Quantitation Limits.....	87
III General Conditions of the Permit	89
A. Duty to Comply.....	89
B. Continuation of the Expired General Permit.....	89
C. Duty to Reapply.....	89
D. Need to Halt or Reduce Activity Not a Defense.....	89
E. Duty to Mitigate.....	89
F. Duty to Provide Information.....	89
G. Signatory Requirements.....	89
H. Oil and Hazardous Substance Liability.....	90
I. Release in Excess of Reportable Quantities.....	90

J. Property Rights.....	90
K. Severability.....	90
L. Transfers.....	90
M. State Laws.....	90
N. Proper Operations and Maintenance.....	90
O. Monitoring and Records.....	90
P. Bypass of Treatment System.....	91
Q. Upset Conditions.....	91
R. Inspection and Entry.....	92
S. Permit Actions.....	92
T. Requiring an Individual Permit.....	92
U. Reopener Clause.....	92
V. Availability of Records.....	92
W. Confidentiality of Information.....	93
X. Right to Appeal.....	93

Attachment A: PFAS Analyte List.....	94
---	-----------

**2024 Rhode Island Pollutant Discharge Elimination System
Remediation General Permit**

Part I: Permit Applicability

A. Applicability and Coverage of the Remediation General Permit (RGP)

1. Permit Area: This permit applies to all areas of the State of Rhode Island.
2. Eligibility: Except discharges identified in Part I.A.3, this permit covers the discharge of treated effluent to surface waters from the sources listed below:
 - a. site remediation activities related primarily to petroleum, including site remediation of groundwater contaminated from spills or leaks of gasoline, fuel oil, or other oil contaminated sites, and related activities;
 - b. site remediation where the spill or leak is not petroleum-specific, such as sites contaminated with volatile organic compounds and/or metals, and related activities;
 - c. construction dewatering of contaminated sites, including locations where sub-surface site investigations and/or soil characterization for disposal have revealed various pollutants associated with past industrialization, power generation, incineration, or other activity and where no specific source of contamination is apparent, and related activities; and
 - d. de-watering of miscellaneous contaminated sites, such as aquifer pump testing to evaluate remediation of formerly contaminated sites, well development or rehabilitation at contaminated or formerly contaminated sites, hydrostatic testing of pipelines and tanks, and remediation of contaminated sumps and dikes, and related activities.

Table 1: Activities Covered by Remediation General Permit

Petroleum Related Site Remediation	A. Gasoline Remediation Sites
	B. Fuel Oil (and other Oils) Sites
	C. Petroleum Sites Containing Other Pollutants
Non- Petroleum Site Remediation	D. Volatile Organic Compound (VOC) Only Sites
	E. VOC Sites Containing Other Contaminants
	F. Sites Containing Primarily Metals
Construction Sites	G. Contaminated Construction Dewatering
Miscellaneous Contaminated Discharges	H. Aquifer Pump Testing and Well Development or Rehabilitation at Contaminated Sites
	I. Hydrostatic Testing of Pipelines and Tanks
	J. Contaminated Sumps and Dikes

3. Limitations of Coverage: The following discharges are not authorized by this permit:
 - a. Discharges that have a potential to be contaminated with sources other than those specified in Part A.2 of this permit.
 - b. Discharges that may adversely affect a State or Federally listed, or a proposed to be listed, endangered or threatened species or its critical habitat.
 - c. Discharges that may cause, or have a reasonable potential to cause, or contribute to a water quality violation.
 - d. Discharges to the terminal reservoir of a public drinking water supply.
 - e. Discharges to Class AA, A, or SA waters where the applicant failed to demonstrate to the satisfaction of the Director, that no reasonable alternative exists and that the discharge will not impair existing uses or the attainment of designated uses.
 - f. Discharges to a Publicly Owned Treatment Works (POTWs).
 - g. Discharge of dredge drain back waters covered by CWA Section 401 and 404.
 - h. Discharges listed in an individual permit unless:
 - i. the permit has expired;
 - ii. DEM has terminated the existing permit;
 - iii. The discharges are separate from the currently permitted discharges; or
 - iv. The discharge is new and eligible for this permit (e.g., an industry where the primary process waste discharge is covered by an individual permit, but the facility is conducting groundwater remediation with separate treatment and discharge).
 - i. Discharges for which the Director makes a determination that an individual permit is required under §1.33(C) of the RIPDES Regulations (See 250-RICR-150-10-1.33(C)).
 - j. Remediation or dewatering discharges resulting from on-site response action conducted pursuant to §104, 106, 120, 121 or 122 of the Comprehensive Environmental Response, Compensation, and Liability Act (CERCLA) or discharges that may lead to recontamination of aquatic media at such sites. Discharges from activities beyond the scope of the CERCLA sites are not included in this exclusion. Operators of discharges to a CERCLA site must implement adequate control measures and/or procedures to ensure that discharges will be controlled as necessary such that the discharge meets limits for the applicable water quality criterion.

B. Application and Notice of Intent

1. Definition of "Owner" & "Operator":
 - a. For the purposes of this permit, the "owner" of a property is the person, as defined by §1.4 of the RIPDES regulations (See 250-RICR-150-10-1.4), holding the title, deed, or legal document to the regulated property, facility, or activity, including a party working under an easement on the property.
 - b. The "operator" is defined as the person who has operational control over plans and specifications, or the person who has day-to-day supervision and control of activities occurring at the site. Further, for purposes of this permit, the operator is:
 - i. The owner if that person is performing all work related to complying with this permit; or
 - ii. Both the owner and contractor(s), as co-permittees, if a contractor(s) has been hired to perform work related to complying with this permit.
2. Authorization: To be authorized to discharge under this general permit, owners and operators of remediation discharges shall submit to the Director a standardized Notice of Intent (NOI) form in

accordance with Part II.F of this permit. All NOIs must be submitted to the Director by hard copy (See Part II.F.9), unless DEM implements an electronic reporting tool during the period covered under this permit. If DEM implements an electronic reporting tool, then all NOIs shall be submitted electronically using the system that DEM implements. Upon review of the NOI, the Director may deny coverage under this general permit at any time and require submittal of an application for an individual permit. The Authorization may include special conditions, as necessary to protect waters of the State. Authorization to discharge under this general permit shall only be effective upon the owner(s) receipt of an authorization page signed and certified by the Director or the Director's designee.

3. Deadlines for Requesting Authorization:
 - a. Discharges that were authorized under an existing permit and which are eligible for coverage under this general permit must submit an NOI within thirty (30) days of the effective date of this permit if they will continue discharging.
 - b. Discharges that are eligible for coverage under this general permit, which commence after the effective date of this permit, must submit an NOI at least thirty (30) days prior to the commencement of such discharge.
4. Signature: The NOI must be signed by the owner(s) and operator(s) of the facility, as defined in Part I.B.1, above, in accordance with the signatory requirements of §1.12 of the RIPDES regulations (See 250-RICR-150-10-1.12).
5. Termination of Coverage: Owners and/or operators of facilities must submit to the Director a complete Notice of Termination (NOT) when discharge(s) authorized by the Remediation General Permit no longer occur at the facility. This notification must be made within thirty (30) days of the permanent cessation of the discharge. At that point, coverage under this permit is terminated. The permittee must submit the NOT to the Director by hard copy, unless an electronic reporting tool becomes available during the period covered under the permittee's permit coverage. If DEM implements an electronic reporting tool, then all NOTs shall be submitted electronically using the system that DEM implements. At a minimum, the following information is required in the NOT to terminate coverage under this permit:
 - a. Owner's name, mailing address, contact person, and telephone number;
 - b. Operator's name, mailing address, contact person and telephone number;
 - c. Name and location of the facility;
 - d. RIPDES Remediation General Permit number; and
 - e. Certification that the discharge no longer occurs.
6. Failure to Notify: Owners or operators, who fail to notify the Director of their intent to be covered under a general permit and discharge to waters of the State or to a separate storm sewer system without a RIPDES permit, are in violation of Chapter 46-12 of the Rhode Island General Laws and the Clean Water Act and are subject to legal action.
7. Continuation of the General Permit After Expiration: If this permit is not reissued prior to the expiration date, it will be administratively continued in accordance with the Administrative Procedures Act and remain in force and in effect as to any particular permittee. However, once this permit expires the DEM cannot provide written notification of coverage under this general permit to any permittee who submits a Notice of Intent to DEM after the permit's expiration date. Any permittee who was granted permit coverage prior to the expiration date will automatically remain covered by the continued permit until the earlier of:
 - a. Reissuance of this permit, at which time the permittee must comply with the Notice of Intent conditions of the new permit to maintain authorization to discharge;
 - b. The permittee's submittal of a Notice of Termination;

- c. Issuance of an individual permit for the permittee's discharges; or
- d. A formal permit decision by the DEM not to reissue this general permit, at which time the permittee must seek coverage under an alternative permit.

Part II. Permit Conditions

A. Effluent Limitations and Monitoring Requirements

1. General Effluent Limitations and Monitoring Requirements – Each outfall subject to this permit shall be limited and monitored by the permittee as specified below in accordance with the receiving water classification indicated. Permittees shall monitor the effluent in accordance with the monitoring requirements from Part II.B.
 - a. Permittees must monitor twice per month for each outfall, except where DEM requires an alternative frequency in accordance with Part II.A.6.d and Part II.B.2 of this permit.
 - b. All of the parameter limits of the permit apply except where the permittee has certified that pollutants are “believed absent” in the discharge (see Part II.A.6 below) or where specifically excluded in the provisions below.
2. Water Quality Requirements
 - a. The discharge shall not cause visible discoloration of the receiving waters.
 - b. The discharge shall contain neither a visible oil sheen, foam, nor floating solids at any time.
 - c. The discharge shall not cause or contribute to any erosion, stream scouring, or sedimentation caused directly or indirectly by the discharge.
 - d. The pH of the discharge shall not be:
 - i. Freshwaters (classifications AA, Non-Class AA): less than 6.5 nor greater than 9.0 standard units at any time, or as naturally occurs, unless these values are exceeded as a result of the approved treatment processes; or
 - ii. Saltwaters: less than 6.5 nor greater than 8.5 standard units but not more than 0.2 units outside of the normally occurring range, unless these values are exceeded as result of the approved treatment processes.
3. Prohibition of Toxic Discharge - The discharge shall not contain materials in concentrations or in combinations which are hazardous or toxic to aquatic life or which would impair the uses designated by the classification of the receiving waters.
4. Effluent Limits – Permittees must demonstrate compliance with all of the applicable effluent limits specified in this permit.
5. Consideration of Dilution Factors for Discharges of Metals – Where discharges of metals to freshwater receiving waters require effluent limits, dilution factors may be applied to the discharges of metals to freshwaters. In the NOI, the applicant must select the applicable parameters and, if necessary, an appropriate dilution factor. See the NOI Instructions for details on how to determine the applicable effluent limitations for metals into freshwater.
6. Specific Pollutants to Be Monitored for Individual Sub-Categories
 - a. Upon becoming subject to this permit, permittees must monitor their effluents for all of the pollutants related to the applicable sub-categories listed in Part II.D at a frequency of twice per month or an alternative frequency in accordance with Part II.A.6.d and Part II.B.2 of this permit, except for any pollutant for which the permittee certified in the NOI that the pollutant was “believed absent” (See Part II.A.6.b below). A pollutant is “believed absent” if it was sampled in the influent and measured as non-detect relative to the detection limits in Part II.G. A pollutant may also be “believed absent” if the pollutant has not been sampled but, there are no known sources of the pollutant in the influent and the pollutant will not be added or generated prior to discharge.

- i. If the discharge falls within only one sub-category (e.g. gasoline remediation sites), the permittee must monitor for the pollutants specified for that sub-category, except for any pollutant for which the permittee certified in the NOI that the pollutant was “believed absent”.
 - ii. If the site falls within more than one sub-category, the permittee is required to monitor for all sub-category specified pollutants, except for any pollutant for which the permittee certified in the NOI that the pollutant was “believed absent”.
- b. Regardless of certification of pollutants as “believed absent”, or not being listed in the monitoring requirements for Categories A through J in Part II.D below, the Director may provide written notice to any operator, requiring monitoring of specific parameters on a case-by-case basis. Any such notice will briefly state the reasons for the monitoring, the parameters to be monitored, frequency and period of monitoring, sample types, and reporting requirements.
 - c. In addition to reporting requirements specified in the permit, permittees must notify the Director as soon as they have reason to believe that any activity has occurred which would result in the discharge of any pollutant which is not otherwise limited in the permit.
 - d. Certain monitoring requirements may be reduced upon demonstration that the pollutants are not present by ongoing sampling and analytical data. This type of change requires written approval by the DEM. Prior to receiving written approval, the permittee must continue to monitor at the frequency specified in the Remediation General Permit. To be eligible for a reduction, the permittee must provide data demonstrating compliance with the applicable parameter limits and a summary of the performance of the treatment system including such information as: flow, operation and maintenance activities, and all available influent and effluent data for a minimum of three (3) consecutive months and ten (10) samples for each parameter for which reduction is being requested.

7. Operations and Maintenance Requirements

- a. The permittee shall treat all waters prior to discharge using the treatment system described in the NOI. The permittee may not modify the treatment system without prior approval from the Office of Water Resources.
- b. Treatment systems shall be equipped with liquid level and pressure sensors, alarms, automatic shutoffs and other fail-safe features, as appropriate to ensure the integrity of the treatment system. If the system includes granular activated carbon and/or ion exchange, the theoretical time to carbon and/or resin breakthrough of the entire system shall be greater than either ten (10) days beyond the anticipated period of the discharge or sixty (60) days, whichever is less.
- c. The DEM reserves the right to require monitoring of influent iron concentrations and may require iron pretreatment if iron fouling reduces the effectiveness of treatment equipment.
- d. The treatment system shall be inspected at a minimum of twice per month to assure the system is operating efficiently. As a result of these or any other inspections, appropriate action shall be taken, as soon as practicable, to resolve any problems discovered during an inspection. Records documenting inspections and any actions taken (i.e. changing carbon) shall be retained and made available upon request to the Office of Water Resources and any other Office, as appropriate. If monitoring requirements are reduced per Part II.A.6.d, then the minimum inspection requirements shall be reduced consistent with the reduced monitoring requirements.
- e. The permittee shall at all times properly operate and maintain the groundwater recovery/treatment system. If there is any indication of treatment system malfunction, breakthrough, or exceedance of any effluent limitations, the system must be turned off and the Office of Water Resources notified within twenty-four (24) hours of becoming aware of the occurrence.

8. Flow Monitoring - The permittee shall monitor flow with a continuous flow meter, e.g., a meter that records the instantaneous gallons per minute (gpm) and total gallons discharged, to ensure that it does not exceed the design flow of the treatment system, determined by the component of the treatment train with the most restricted flow and as specified on the NOI.
9. Conditions for Discharges of Chemicals and Additives
 - a. The permittee shall not discharge any chemical or additive, including, but not limited to: algaecides/biocides, antifoams, coagulants, corrosion/scale inhibitors/coatings, disinfectants, flocculants, neutralizing agents, oxidants, oxygen scavengers, pH conditioners, surfactants and bioremedial agents, including microbes, which was not reported in the NOI submitted to DEM for a site.
 - b. Upon authorization to discharge, chemicals and/or additives which have been disclosed to the DEM may be discharged up to the frequency and level disclosed, provided that such discharge does not violate any permit conditions or Rhode Island water quality standards.
 - c. The DEM may request additional information to provide authorization to discharge chemicals and/or additives, including but not limited to: Whole Effluent Toxicity testing.
 - d. To request authorization to discharge chemicals and/or additives in the NOI submitted to DEM for a site the permittee must submit the following information in writing, at a minimum, in accordance with Part II.F.4.d of this general permit:
 - i. All information required in Part II.F.4.d;
 - ii. The applicant must certify that the addition of such chemicals:
 - a) Will not add any pollutants in concentrations which exceed permit effluent limitations;
 - b) Will not exceed any applicable water quality standard; and
 - c) Will not add any pollutants that would justify the application of permit conditions that are different from or absent in this permit; or
 - iii. The applicant must disclose any pollutants different from or absent in this permit that may be present in discharges with the addition of the chemicals and/or additives. Additional monitoring and/or Whole Effluent Toxicity testing may be required.
10. Additional Permit Requirements
 - a. The permittee and operators covered by this permit must adhere to proper waste management practices for the facility and must comply with all applicable State and Federal regulations applicable to the management of wastes. Please note that the submission of a Notice of Termination (NOT) of the discharge does not relieve the operator or the permittee of any requirement for proper management of solid and hazardous waste generated as a result of complying with the permit.
 - b. If an operator determines their site may be exposed to, or has previously experienced such major storm and flood events, additional control measures that must be considered include, but are not limited to:
 - i. Reinforce materials storage structures to withstand flooding and additional exertion of force;
 - ii. Prevent floating of semi-stationary structures by elevating above flood level or securing with non-corrosive device;
 - iii. When a delivery of exposed materials is expected, and a storm is anticipated within 48 hours, delay delivery until after the storm or store materials as appropriate (refer

to emergency procedures);

- iv. Temporarily store materials and waste above flood level;
- v. Temporarily reduce or eliminate outdoor storage;
- vi. Temporarily relocate any mobile vehicles and equipment to higher ground;
- vii. Develop scenario-based emergency procedures for major storm and flood events that are complementary to regular BMP planning and identify emergency contacts for staff and contractors; and
- viii. Conduct staff training for implementing your emergency procedures at regular intervals.

11. Emerging Contaminants – Applicants for sites and/or discharges with known or suspected per- and polyfluoroalkyl substances (PFAS) contamination shall test one sample of the influent as part of the application process. Sampling shall be for the PFAS analytes as shown in Attachment A. PFAS shall be analyzed using Clean Water Act wastewater analytical method 1633 until a 40 CFR Part 136 approved test method for wastewater is approved. If any PFAS compounds are detected based on the laboratory analysis, the applicant shall install appropriate treatment for the removal of PFAS and test the treated effluent when the discharge commences per the sampling requirements in Part II.B of the general permit. DEM may include additional conditions and/or sampling requirements in the DEM RGP Authorization.

B. Sampling, Testing, Recordkeeping, and Reporting Requirements

1. Sampling and Testing

- a. Samples shall be taken at a location that provides for a representative analysis of the influent and effluent. Influent sampling should be taken at a point prior to any treatment of the water, i.e., raw influent. Effluent samples should be taken just prior to discharge to the receiving water or, if the effluent is commingled with another permitted discharge, prior to such commingling.
- b. All samples shall be tested according to sufficiently sensitive test procedures using the analytical methods found in 40 CFR Part 136, or alternative test methods approved in accordance with the procedures in 40 CFR Part 136, unless specifically prohibited or authorized for use by DEM.

2. Initial Treatment System Discharge Startup – The permittee must perform the following additional sampling and analysis of all applicable parameters during the first month of discharge.

- a. During the first week of discharge, permittees must take laboratory samples from the effluent once each day on the first, third, and sixth day of the discharge.
- b. During the first week, samples must be analyzed in accordance with 40 CFR 136 or by other methods approved by this permit with a 72-hour turnaround time (unless a waiver is granted by DEM). After the first week, samples may be analyzed with a 7-day turnaround time (unless a waiver is granted by DEM).
- c. If the treatment system is working properly and achieving effluent limits, effluent sampling for the remainder of the first month shall be weekly (i.e., for weeks 2, 3, and 4) and then at a frequency of twice per month thereafter for the term of the permit unless modified in accordance with Part II.A.6.d. After the first week, results for these additional samples shall be received and reviewed by the operator no more than seven (7) days from the sampling event.
- d. During system startup, the operator may also utilize field monitoring and visual observations as appropriate (e.g. portable organic vapor analysis or other tests) to aid in proper system startup.

- e. If the operator has any indication of water treatment system malfunction or violation of effluent limitations, the operator must turn the system off and notify the DEM within 24 hours. If the problem has been corrected, discharge may resume upon completion of the correction of the problems and upon DEM approval of the startup. After the discharge is restarted the operator may resume with the regular sampling schedule per Part II.B.2.a-d above.

3. Recordkeeping Requirements

- a. On-site Records – The following records must be maintained, either electronically or hard copy, on-site and/or with the operator to be made available upon inspection and/or request by DEM:
 - i. A complete copy of this General Permit.
 - ii. A copy of DEM's authorization to discharge and any subsequent modifications.
 - iii. Copies of information submitted to DEM and the municipality in which the site is located.
 - iv. Copies of any correspondence received from the DEM and the municipality in which the site is located regarding permit coverage.
 - v. Any records of monitoring instrumentation, field monitoring, and visual observations (e.g. portable organic vapor monitoring, turbidity meter, visible sheen observations).
 - vi. Any records of system operation and maintenance.
 - vii. Any records of site inspections and employee training.
 - viii. Any other records as listed in Part III.O of this permit.
- b. Retention of Records – Operators must retain the records specified above for a minimum of five (5) years from the date of the sample, measurement, report or notice, whichever applies. If the permitted project is no longer active and there is no longer an on-site office, then the records shall be maintained at the operator's business office.

4. Monitoring and Reporting

a. Monitoring

All monitoring required by this permit shall be done in accordance with sampling and analytical testing procedures specified in Federal Regulations (40 CFR Part 136) or by other methods approved by DEM.

b. Submittal of Discharge Monitoring Reports (DMRs)

The Permittee must report monitoring data to DEM on a monthly basis, as follows:

i. For discharges lasting twelve (12) months or more, monitoring results obtained during the previous calendar month shall be summarized and reported to DEM in DMRs submitted electronically using the NetDMR reporting tool (<https://netdmr.epa.gov>) no later than the 15th day of the month following the completed reporting period. When the permittee submits DMRs using NetDMR, it is not required to submit hard copies of DMRs to DEM.

ii. For discharges lasting less than twelve (12) months, monitoring results obtained during the previous calendar month shall be summarized and reported on a hard copy DMR Form postmarked no later than the 15th day of the month following the completed reporting period unless the permittee opts to submit an electronic DMR. A signed copy of this report shall be submitted to the address as listed in Part II.B.4.d below. Note: If the permittee opts to submit DMRs electronically using NetDMR, it is not required to submit hard copies to DEM.

iii. The first report is due for the calendar month during which the facility obtained coverage under

this general permit.

c. Submittal of Reports as NetDMR Attachments

Unless otherwise specified in this permit, the permittee must submit electronic copies of documents in NetDMR that are directly related to the DMR. These include the following:

- DMR Cover Letters
- Below Detection Limit summary tables
- Analytical laboratory reports
- Summary of hydrostatic test water transfer per Part II.B.7

All other reports should be submitted to DEM as a hard copy via regular US mail (see Part II.B.4.d below).

d. Submittal of Requests and Reports to DEM

The following requests, reports, and information described in this permit shall be submitted as hard copy to the DEM, unless an electronic reporting tool becomes available. If DEM implements an electronic reporting tool, the specific request/report shall be submitted electronically using the system that DEM implements.

- i. Transfer of Permit notice
- ii. Request for changes in sampling location
- iii. Notice of activity which results in the discharge of any pollutant which is not otherwise limited in the permit per Part II.A.6.c
- iv. Request for reduction in testing frequency per Part II.A.6.d
- v. Request to modify the approved treatment system per Part II.A.7.a
- vi. Written notifications required under Part III
- vii. Notice of unauthorized discharges

These reports, information, and requests shall be submitted to DEM by hard copy mail to the following address:

Rhode Island Department of Environmental Management
RIPDES Program
235 Promenade Street
Providence, RI 02908

e. Verbal Reports and Verbal Notifications

Any verbal reports or verbal notifications, if required in Parts I - III of this permit, shall be made to the DEM. This includes verbal reports and notifications required under twenty-four hour reporting as noted below. Verbal reports and verbal notifications shall be made to DEM at (401) 222-4700 or (401) 222-3070 at night.

Twenty-four hour reporting. The permittee shall report any noncompliance which may endanger health or the environment by calling DEM within twenty-four hours of becoming aware of the violation at (401) 222-4700 or (401) 222-3070 at night.

A written submission shall also be provided within five (5) days of the time the permittee becomes aware of the circumstances. The written submission shall contain a description of the noncompliance and its cause; the period of noncompliance, including exact dates and times, and if the noncompliance has not been corrected, the anticipated time it is expected to continue; and steps taken or planned to reduce, eliminate, and prevent reoccurrence of the noncompliance.

The following information must be reported immediately:

- i. Any unanticipated bypass which causes a violation of any effluent limitation in the permit; or
- ii. Any upset which causes a violation of any effluent limitation in the permit; or
- iii. Any violation of a maximum daily discharge limitation for any of the pollutants specifically listed by the Director in the permit.

The Director may waive the written report on a case-by-case basis if the oral report has been received within 24 hours.

5. Extended System Shutdown – Treatment systems and discharges that are interrupted for 120 or greater consecutive days are considered extended shutdowns. Any system restart after this period shall revert to the monitoring and reporting requirements for initial system startup outlined in Part II.B.2 of this permit.
6. Short-Term Discharges – Discharges lasting less than one week (7 days), such as: pump tests and discharge of temporarily containerized waters, excluding hydrostatic testing discharges, which are then terminated and are not planned to be re-started, are considered “short-term” discharges.
 - a. For all short-term discharges, the permittee must take a minimum of three (3) representative effluent laboratory samples.
 - b. At least one sample must be taken on the first day of discharge and one on the last day of discharge. Discharges of one day or less must take a minimum of one sample.
 - c. Samples must be analyzed with a 72-hour turnaround time in accordance with 40 CFR 136 or by other methods allowed by this permit.
 - d. The reporting requirements of Part II.B.4 of this permit apply.
7. Hydrostatic Testing and Discharge Monitoring and Reporting Requirements – Hydrostatic test waters must meet additional monitoring requirements due to the unique nature of those activities.
 - a. For New and Existing Tanks and Pipelines:
 - i. Prior to testing, the interior of the tank(s) and/or piping being tested shall be cleaned and certified to be free of product. There shall be no discharge of tank and/or pipe cleaning residual/debris to surface waters. At a minimum, four (4) representative samples shall be taken of the hydrostatic-test water: one (1) grab sample of the influent and three (3) serial-grab samples of the effluent from the tank. The influent grab sample shall be taken approximately midway through the fill segment of the hydrostatic-test procedure. The three (3) effluent serial-grab samples shall be taken over the duration of the entire discharge segment of the hydrostatic-test procedure. The first serial grab sample shall be taken during the initial phase of the discharge; the second serial grab sample is to be taken midway through the discharge; and the final sample shall be taken at the end of the discharge. These samples should provide adequate characterization of the influent and effluent hydrostatic-test water.

Any hydrostatic test water released from the tank(s), must satisfy all the effluent limitations and conditions of this permit as required in Part II.D.25, 26, or 27 of the permit. A logbook shall be kept on site at all times to document the start and end of each hydrostatic test, the total flow discharged and all monitoring data.

Should any visual inspection or suspicious odor indicate the presence of product while inspecting the effluent from the treatment unit, or if laboratory results from the representative samples of the discharge become available that may indicate an exceedance of the permit effluent limits, the transfer shall be halted immediately, followed by notification to the DEM of the suspended discharge. After the discharge of the hydrostatic test water has been completed, the permittee shall submit a

letter/report to the DEM with the Discharge Monitoring Report, summarizing the results of the transfer. This report shall contain: the date(s) of the hydrostatic test water transfer; the volume of hydrostatic test water transferred; and the analytically determined values of the discharge parameters.

- ii. Prior to hydrostatic testing, pipes or tanks that will come into contact with the test water must be thoroughly cleaned to remove scale, soil, residues, etc.
- iii. Discharge flow should not exceed the flow of receiving streams and rivers or alter the habitat in other water bodies.
- iv. All chemical additives must be identified in accordance with the requirements from Part II.A.9.
- v. De-watering structures (such as splash blocks, sediment filters, etc.) must be used to dissipate energy and control erosion.

b. Permittees shall follow the reporting requirements of Part II.B.4.

C. Special RIPDES Permit Conditions

Compliance with Municipal Separate Storm Sewer Systems (MS4) Requirements and Storm Water Management Plans (SWMPs)

1. Dischargers covered by the general permit who discharge indirectly into a surface water through a MS4 collection system must comply with local requirements for discharge to that system including any SWMPs developed under the MS4 general permit. The permittee shall keep records of any local permit, monitoring, or other information regarding the compliance with the local requirements along with the compliance records for this permit.
2. If an operator of a facility is covered by the Multi-Sector General Permit for Stormwater Discharges Associated with Industrial Activity (MSGP) and by this general permit, the following additional requirements apply:
 - a. Operators who are utilizing a non-municipal storm sewer system at a facility covered by the MSGP must comply with any SWMP developed under that permit.
 - b. Where there is separate ownership and/or different operators of the facility/site and the treatment system, the operator of the facility/site covered by this permit must notify the operator of the facility covered by the MSGP.
3. An authorization to discharge under this general permit, where the activity discharges to a municipal or private storm drain owned by another party, does not convey any rights or authorization to connect to that drain.

D. Effluent Limitations and Monitoring Requirements

1. Discharge Category A - Gasoline Remediation Sites Discharging to Class AA receiving waters. During the period beginning the date of authorization to discharge and lasting until either the expiration of this general permit or termination of coverage, permittee(s) are authorized to discharge from an approved groundwater treatment system. Such discharges shall be limited and monitored by the permittee as specified below:

Effluent Characteristic	Discharge Limitations Concentration - Specify Units		Monitoring Requirement	
	Average <u>Monthly</u>	Maximum <u>Daily</u>	Measurement <u>Frequency</u> ^{1,2}	Sample <u>Type</u>
Flow	--- GPM	xxx GPM	Continuous ³	Totalizer
Ethanol ⁵	---	---	2/Month	Grab
Benzene	4.72 µg/l	5 µg/l	2/Month	Grab
Toluene	11.2 µg/l	508 µg/l	2/Month	Grab
Ethylbenzene	28.8 µg/l	1280 µg/l	2/Month	Grab
Total Xylenes (m,p,o)	2.4 µg/l	106.4 µg/l	2/Month	Grab
Total BTEX	---	100 µg/l	2/Month	Grab
Naphthalene	2.08 µg/l	20 µg/l	2/Month	Grab
Ethylene dibromide	---	0.05 µg/l	2/Month	Grab
Methyl-t-Butyl Ether (MTBE)	---	70 µg/l	2/Month	Grab
tert-Butyl Alcohol	---	---	2/Month	Grab
tert-Amyl Methyl Ether	---	---	2/Month	Grab
Total Suspended Solids	---	30,000 µg/l	2/Month	Grab
Total Petroleum Hydrocarbons ⁷	---	1000 µg/l	2/Month	Grab
Lead (Total Recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Iron (Total Recoverable)	See Part II.E	See Part II.E	2/Month	Grab

2. Discharge Category A - Gasoline Remediation Sites Discharging to freshwater Non-Class AA receiving waters. During the period beginning the date of authorization to discharge and lasting until either the expiration of this general permit or termination of coverage, permittee(s) are authorized to discharge from an approved groundwater treatment system. Such discharges shall be limited and monitored by the permittee as specified below:

Effluent Characteristic	<u>Discharge Limitations</u>		Monitoring Requirement	
	Concentration - Specify Units		Measurement Frequency ^{1,2}	Sample Type
	<u>Average Monthly</u>	<u>Maximum Daily</u>		
Flow	--- GPM	xxx GPM	Continuous ³	Totalizer
Ethanol ⁵	---	---	2/Month	Grab
Benzene	4.72 µg/l	5 µg/l	2/Month	Grab
Toluene	11.2 µg/l	508 µg/l	2/Month	Grab
Ethylbenzene	28.8 µg/l	1,280 µg/l	2/Month	Grab
Total Xylenes (m,p,o)	2.4 µg/l	106.4 µg/l	2/Month	Grab
Total BTEX	---	100 µg/l	2/Month	Grab
Naphthalene	2.08 µg/l	20 µg/l	2/Month	Grab
Ethylene dibromide	---	0.05 µg/l	2/Month	Grab
Methyl-t-Butyl Ether	---	70 µg/l	2/Month	Grab
tert-Butyl Alcohol	---	---	2/Month	Grab
tert-Amyl Methyl Ether	---	---	2/Month	Grab
Total Suspended Solids	---	30,000 µg/l	2/Month	Grab
Total Petroleum Hydrocarbons ⁷	---	1,000 µg/l	2/Month	Grab
Lead (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Iron (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab

3. Discharge Category A - Gasoline Remediation Sites Discharging to saltwater receiving waters. During the period beginning the date of authorization to discharge and lasting until either the expiration of this general permit or termination of coverage, permittee(s) are authorized to discharge from an approved groundwater treatment system. Such discharges shall be limited and monitored by the permittee as specified below:

Effluent Characteristic	<u>Discharge Limitations</u>		Monitoring Requirement	
	Concentration - Specify Units		Measurement Frequency ^{1,2}	Sample Type
	<u>Average Monthly</u>	<u>Maximum Daily</u>		
Flow	--- GPM	xxx GPM	Continuous ³	Totalizer
Ethanol ⁵	---	---	2/Month	Grab
Benzene	5 µg/l	5 µg/l	2/Month	Grab
Toluene	12,000 µg/l	---	2/Month	Grab
Ethylbenzene	1680 µg/l	---	2/Month	Grab
Total Xylenes (m,p,o)	---	---	2/Month	Grab
Total BTEX	100 µg/l	100 µg/l	2/Month	Grab
Naphthalene	---	20 µg/l	2/Month	Grab
Ethylene dibromide	---	0.05 µg/l	2/Month	Grab
Methyl-t-Butyl Ether	---	70 µg/l	2/Month	Grab
tert-Butyl Alcohol	---	---	2/Month	Grab
tert-Amyl Methyl Ether	---	---	2/Month	Grab
Total Suspended Solids	---	30,000 µg/l	2/Month	Grab
Total Petroleum Hydrocarbons ⁷	---	1,000 µg/l	2/Month	Grab
Lead (total recoverable)	6.81 µg/l	160 µg/l	2/Month	Grab
Iron (total recoverable)	---	1,000 µg/l	2/Month	Grab

4. Discharge Category B - Oil Remediation Sites Discharging to Class AA receiving waters. During the period beginning the date of authorization to discharge and lasting until either the expiration of this general permit or termination of coverage, permittee(s) are authorized to discharge from an approved groundwater treatment system. Such discharges shall be limited and monitored by the permittee as specified below:

Effluent Characteristic	Discharge Limitations		Monitoring Requirement	
	Concentration - Specify Units		Measurement Frequency ^{1,2}	Sample Type
	Average Monthly	Maximum Daily		
Flow	--- GPM	xxx GPM	Continuous ³	Totalizer
Total Suspended Solids	---	30,000 µg/l	2/Month	Grab
Acetone	---	7970 µg/l	2/Month	Grab
Total Petroleum Hydrocarbons ⁷	---	1000 µg/l	2/Month	Grab
Total Group I Polycyclic Aromatic Hydrocarbons	0.03 µg/l ⁴	1 µg/l	2/Month	Grab
Benzo (a) Anthracene	---	0.0038 µg/l ⁴	2/Month	Grab
Benzo (a) Pyrene	---	0.0038 µg/l ⁴	2/Month	Grab
Benzo (b) Fluoranthene	---	0.0038 µg/l ⁴	2/Month	Grab
Benzo (k) Fluoranthene	---	0.0038 µg/l ⁴	2/Month	Grab
Chrysene	---	0.0038 µg/l ⁴	2/Month	Grab
Dibenzo (a,h) anthracene	---	0.0038 µg/l ⁴	2/Month	Grab
Indeno (1,2,3-cd) Pyrene	---	0.0038 µg/l ⁴	2/Month	Grab
Total Group II Polycyclic Aromatic Hydrocarbons (PAH)	0.03 µg/l ⁴	100 µg/l	2/Month	Grab
Acenaphthene	1.52 µg/l	1.9 µg/l	2/Month	Grab
Acenaphthylene	---	---	2/Month	Grab
Anthracene	6640 µg/l	---	2/Month	Grab
Benzo (ghi) Perylene	---	---	2/Month	Grab
Fluoranthene	3.52 µg/l	159.2 µg/l	2/Month	Grab
Fluorene	880 µg/l	---	2/Month	Grab
Naphthalene	2.08 µg/l	20 µg/l	2/Month	Grab
Phenanthrene	---	---	2/Month	Grab
Pyrene	664 µg/l	---	2/Month	Grab
Benzene	4.72 µg/l	5 µg/l	2/Month	Grab
Toluene	11.2 µg/l	508 µg/l	2/Month	Grab
Ethylbenzene	28.8 µg/l	1280 µg/l	2/Month	Grab
(m,p,o) Xylenes	2.4 µg/l	106.4 µg/l	2/Month	Grab
Methyl-t-Butyl Ether (MTBE)	---	70 µg/l	2/Month	Grab
Total BTEX	---	100 µg/l	2/Month	Grab
Nickel (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Chromium III (trivalent, total recoverable)	See Part II.E	See Part II.E	2/Month	Grab

Chromium VI (hexavalent, total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Zinc (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Iron (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab

5. Discharge Category B - Oil Remediation Sites Discharging to freshwater Non-Class AA receiving waters. During the period beginning the date of authorization to discharge and lasting until either the expiration of this general permit or termination of coverage, permittee(s) are authorized to discharge from an approved groundwater treatment system. Such discharges shall be limited and monitored by the permittee as specified below:

Effluent Characteristic	Discharge Limitations Concentration - Specify Units		Monitoring Requirement	
	Average <u>Monthly</u>	Maximum <u>Daily</u>	Measurement <u>Frequency</u> ^{1,2}	Sample <u>Type</u>
Flow	--- GPM	xxx GPM	Continuous ³	Totalizer
Total Suspended Solids	---	30,000 µg/l	2/Month	Grab
Acetone	---	7,970 µg/l	2/Month	Grab
Total Petroleum Hydrocarbons ⁷	---	1,000 µg/l	2/Month	Grab
Total Group I Polycyclic Aromatic Hydrocarbons	0.14 µg/l ⁴	1 µg/l	2/Month	Grab
Benzo (a) Anthracene	---	0.0038 µg/l ⁴	2/Month	Grab
Benzo (a) Pyrene	---	0.0038 µg/l ⁴	2/Month	Grab
Benzo (b) Fluoranthene	---	0.0038 µg/l ⁴	2/Month	Grab
Benzo (k) Fluoranthene	---	0.0038 µg/l ⁴	2/Month	Grab
Chrysene	---	0.0038 µg/l ⁴	2/Month	Grab
Dibenzo (a,h) anthracene	---	0.0038 µg/l ⁴	2/Month	Grab
Indeno (1,2,3-cd) Pyrene	---	0.0038 µg/l ⁴	2/Month	Grab
Total Group II Polycyclic Aromatic Hydrocarbons	0.14 µg/l ⁴	100 µg/l	2/Month	Grab
Acenaphthene	1.52 µg/l	1.9 µg/l	2/Month	Grab
Acenaphthylene	---	---	2/Month	Grab
Anthracene	32,000 µg/l	---	2/Month	Grab
Benzo (ghi) Perylene	---	---	2/Month	Grab
Fluoranthene	3.52 µg/l	159.2 µg/l	2/Month	Grab
Fluorene	4,240 µg/l	---	2/Month	Grab
Naphthalene	2.08 µg/l	20 µg/l	2/Month	Grab
Phenanthrene	---	---	2/Month	Grab
Pyrene	3200 µg/l	---	2/Month	Grab
Benzene	4.72 µg/l	5 µg/l	2/Month	Grab
Toluene	11.2 µg/l	508 µg/l	2/Month	Grab
Ethylbenzene	28.8 µg/l	1,280 µg/l	2/Month	Grab
Total Xylenes (m,p,o)	2.4 µg/l	106.4 µg/l	2/Month	Grab
Total BTEX	---	100 µg/l	2/Month	Grab
Methyl-t-Butyl Ether	---	70 µg/l	2/Month	Grab
Nickel (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Chromium III (trivalent, total)	See Part II.E	See Part II.E	2/Month	Grab

recoverable)				
Chromium VI (hexavalent, total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Zinc (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Iron (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab

6. Discharge Category B - Oil Remediation Sites Discharging to saltwater receiving waters. During the period beginning the date of authorization to discharge and lasting until either the expiration of this general permit or termination of coverage, permittee(s) are authorized to discharge from an approved groundwater treatment system. Such discharges shall be limited and monitored by the permittee as specified below:

Effluent Characteristic	Discharge Limitations Concentration - Specify Units		Monitoring Requirement	
	Average Monthly	Maximum Daily	Measurement Frequency ^{1,2}	Sample Type
Flow	--- GPM	xxx GPM	Continuous ³	Totalizer
Total Suspended Solids	---	30,000 µg/l	2/Month	Grab
Acetone	---	7970 µg/l	2/Month	Grab
Total Petroleum Hydrocarbons ⁷	---	1000 µg/l	2/Month	Grab
Total Group I Polycyclic Aromatic Hydrocarbons	0.14 µg/l ⁴	1 µg/l	2/Month	Grab
Benzo (a) Anthracene	0.0038 µg/l ⁴	0.0038 µg/l ⁴	2/Month	Grab
Benzo (a) Pyrene	0.0038 µg/l ⁴	0.0038 µg/l ⁴	2/Month	Grab
Benzo (b) Fluoranthene	0.0038 µg/l ⁴	0.0038 µg/l ⁴	2/Month	Grab
Benzo (k) Fluoranthene	0.0038 µg/l ⁴	0.0038 µg/l ⁴	2/Month	Grab
Chrysene	0.0038 µg/l ⁴	0.0038 µg/l ⁴	2/Month	Grab
Dibenzo (a,h) anthracene	0.0038 µg/l ⁴	0.0038 µg/l ⁴	2/Month	Grab
Indeno (1,2,3-cd) Pyrene	0.0038 µg/l ⁴	0.0038 µg/l ⁴	2/Month	Grab
Total Group II Polycyclic Aromatic Hydrocarbons	0.14 µg/l ⁴	100 µg/l	2/Month	Grab
Acenaphthene	1.9 µg/l	1.9 µg/l	2/Month	Grab
Acenaphthylene	---	---	2/Month	Grab
Anthracene	32000 µg/l	---	2/Month	Grab
Benzo (ghi) Perylene	---	---	2/Month	Grab
Fluoranthene	112 µg/l	---	2/Month	Grab
Fluorene	4240 µg/l	---	2/Month	Grab
Naphthalene	---	20 µg/l	2/Month	Grab
Phenanthrene	---	---	2/Month	Grab
Pyrene	3200 µg/l	---	2/Month	Grab
Benzene	5 µg/l	5 µg/l	2/Month	Grab
Toluene	12000 µg/l	---	2/Month	Grab
Ethylbenzene	1680 µg/l	---	2/Month	Grab
Total Xylenes (m,p,o)	---	---	2/Month	Grab
Total BTEX	100 µg/l	100 µg/l	2/Month	Grab
Methyl-t-Butyl Ether	---	70 µg/l	2/Month	Grab
Nickel (total recoverable)	6.62 µg/l	59.79 µg/l	2/Month	Grab
Chromium III (trivalent, total)	100 µg/l	323 µg/l	2/Month	Grab

recoverable)				
Chromium VI (hexavalent, total recoverable)	40.28 µg/l	323 µg/l	2/Month	Grab
Zinc (total recoverable)	68.5 µg/l	76.11 µg/l	2/Month	Grab
Iron (total recoverable)	---	1000 µg/l	2/Month	Grab

7. Discharge Category C - Petroleum Sites Containing Other Pollutants Discharging to Class AA receiving waters. During the period beginning the date of authorization to discharge and lasting until either the expiration of this general permit or termination of coverage, permittee(s) are authorized to discharge from an approved groundwater treatment system. Such discharges shall be limited and monitored by the permittee as specified below:

Effluent Characteristic	Discharge Limitations Concentration - Specify Units		Monitoring Requirement	
	Average Monthly	Maximum Daily	Measurement Frequency ^{1,2}	Sample Type
Flow	--- GPM	xxx GPM	Continuous ³	Totalizer
Ammonia	---	---	2/Month	Grab
Ethanol ⁵	---	---	2/Month	Grab
Total Suspended Solids	---	30,000 µg/l	2/Month	Grab
Total Residual Chlorine	11 µg/l	19 µg/l	2/Month	Grab
Total Petroleum Hydrocarbons ⁷	---	1,000 µg/l	2/Month	Grab
Cyanide	4.16 µg/l ⁴	17.6 µg/l	2/Month	Grab
Benzene	4.72 µg/l	5 µg/l	2/Month	Grab
Toluene	11.2 µg/l	508 µg/l	2/Month	Grab
Ethylbenzene	28.8 µg/l	1,280 µg/l	2/Month	Grab
Total Xylenes (m,p,o)	2.4 µg/l	106.4 µg/l	2/Month	Grab
Total BTEX	---	100 µg/l	2/Month	Grab
Ethylene dibromide	---	0.05 µg/l	2/Month	Grab
Methyl-t-Butyl Ether	---	70 µg/l	2/Month	Grab
tert-Amyl Methyl Ether	---	---	2/Month	Grab
Carbon Tetrachloride	1.84 µg/l	4.4 µg/l	2/Month	Grab
1,4 Dichlorobenzene	0.96 µg/l	5 µg/l	2/Month	Grab
1,2 Dichlorobenzene	1.44 µg/l	63.2 µg/l	2/Month	Grab
1,3 Dichlorobenzene	6.96 µg/l	312 µg/l	2/Month	Grab
Total Dichlorobenzene	---	763 µg/l	2/Month	Grab
1,1 Dichloroethane	---	70 µg/l	2/Month	Grab
1,2 Dichloroethane	3.04 µg/l	5 µg/l	2/Month	Grab
1,1 Dichloroethylene	3.2 µg/l	3.2 µg/l	2/Month	Grab
cis-1,2 Dichloroethylene	---	70 µg/l	2/Month	Grab
Dichloromethane	---	4.6 µg/l	2/Month	Grab
Tetrachloroethylene	4.24 µg/l	5 µg/l	2/Month	Grab
1,1,1 Trichloroethane	---	200 µg/l	2/Month	Grab
1,1,2 Trichloroethane	4.72 µg/l	5 µg/l	2/Month	Grab
Trichloroethylene	5 µg/l	5 µg/l	2/Month	Grab
Vinyl Chloride	0.02 µg/l ⁴	2 µg/l	2/Month	Grab

Acetone	---	7,970 µg/l	2/Month	Grab
1,4 Dioxane	---	200 µg/l	2/Month	Grab
Total Phenols	4.48 µg/l	200.8 µg/l	2/Month	Grab
Pentachlorophenol (PCP)	0.04 µg/l ⁴	0.05 µg/l ⁴	2/Month	Grab
Total Phthalates	3 µg/l	190 µg/l	2/Month	Grab
Bis (2-Ethylhexyl) Phthalate	6 µg/l	6 µg/l	2/Month	Grab
Total Group I Polycyclic Aromatic Hydrocarbons	0.03 µg/l ⁴	1 µg/l	2/Month	Grab
Benzo (a) Anthracene	---	0.0038 µg/l ⁴	2/Month	Grab
Benzo (a) Pyrene	---	0.0038 µg/l ⁴	2/Month	Grab
Benzo (b) Fluoranthene	---	0.0038 µg/l ⁴	2/Month	Grab
Benzo (k) Fluoranthene	---	0.0038 µg/l ⁴	2/Month	Grab
Chrysene	---	0.0038 µg/l ⁴	2/Month	Grab
Dibenzo (a,h) anthracene	---	0.0038 µg/l ⁴	2/Month	Grab
Indeno (1,2,3-cd) Pyrene	---	0.0038 µg/l ⁴	2/Month	Grab
Total Group II Polycyclic Aromatic Hydrocarbons	0.03 µg/l ⁴	100 µg/l	2/Month	Grab
Acenaphthene	1.52 µg/l	1.9 µg/l	2/Month	Grab
Acenaphthylene	---	---	2/Month	Grab
Anthracene	6,640 µg/l	---	2/Month	Grab
Benzo (ghi) Perylene	---	---	2/Month	Grab
Fluoranthene	3.52 µg/l	159.2 µg/l	2/Month	Grab
Fluorene	880 µg/l	---	2/Month	Grab
Naphthalene	2.08 µg/l	20 µg/l	2/Month	Grab
Phenanthrene	---	---	2/Month	Grab
Pyrene	664 µg/l	---	2/Month	Grab
Total Polychlorinated Biphenyls (PCBs)	0.000064 µg/l ⁴	0.000064 µg/l ⁴	2/Month	Grab
Antimony (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Arsenic (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Cadmium (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Chromium III (trivalent, total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Chromium VI (hexavalent, total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Copper (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Lead (total Recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Mercury (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Nickel (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Selenium (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab

Silver (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Zinc (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Iron (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
PFAS Analytes ⁶	--- ng/l	--- ng/l	2/Month	Grab

8. Discharge Category C - Petroleum Sites Containing Other Pollutants Discharging to freshwater Non-Class AA receiving waters. During the period beginning the date of authorization to discharge and lasting until either the expiration of this general permit or termination of coverage, permittee(s) are authorized to discharge from an approved groundwater treatment system. Such discharges shall be limited and monitored by the permittee as specified below:

Effluent Characteristic	Discharge Limitations Concentration - Specify Units		Monitoring Requirement	
	Average Monthly	Maximum Daily	Measurement Frequency ^{1,2}	Sample Type
Flow	--- GPM	xxx GPM	Continuous ³	Totalizer
Ammonia	---	---	2/Month	Grab
Ethanol ⁵	---	---	2/Month	Grab
Total Suspended Solids	---	30,000 µg/l	2/Month	Grab
Total Residual Chlorine	11 µg/l	19 µg/l	2/Month	Grab
Total Petroleum Hydrocarbons ⁷	---	1,000 µg/l	2/Month	Grab
Cyanide	4.16 µg/l ⁴	17.6 µg/l	2/Month	Grab
Benzene	4.72 µg/l	5 µg/l	2/Month	Grab
Toluene	11.2 µg/l	508 µg/l	2/Month	Grab
Ethylbenzene	28.8 µg/l	1,280 µg/l	2/Month	Grab
Total Xylenes (m,p,o)	2.4 µg/l	106.4 µg/l	2/Month	Grab
Total BTEX	---	100 µg/l	2/Month	Grab
Ethylene dibromide	---	0.05 µg/l	2/Month	Grab
Methyl-t-Butyl Ether	---	70 µg/l	2/Month	Grab
tert-Amyl Methyl Ether	---	---	2/Month	Grab
Carbon Tetrachloride	4.4 µg/l	4.4 µg/l	2/Month	Grab
1,4 Dichlorobenzene	0.96 µg/l	5 µg/l	2/Month	Grab
1,2 Dichlorobenzene	1.44 µg/l	63.2 µg/l	2/Month	Grab
1,3 Dichlorobenzene	6.96 µg/l	312 µg/l	2/Month	Grab
Total Dichlorobenzene	---	763 µg/l	2/Month	Grab
1,1 Dichloroethane	---	70 µg/l	2/Month	Grab
1,2 Dichloroethane	5 µg/l	5 µg/l	2/Month	Grab
1,1 Dichloroethylene	3.2 µg/l	3.2 µg/l	2/Month	Grab
cis-1,2 Dichloroethylene	---	70 µg/l	2/Month	Grab
Dichloromethane	---	4.6 µg/l	2/Month	Grab
Tetrachloroethylene	4.24 µg/l	5 µg/l	2/Month	Grab
1,1,1 Trichloroethane	---	200 µg/l	2/Month	Grab
1,1,2 Trichloroethane	5 µg/l	5 µg/l	2/Month	Grab
Trichloroethylene	5 µg/l	5 µg/l	2/Month	Grab
Vinyl Chloride	1.92 µg/l	2 µg/l	2/Month	Grab

Acetone	---	7,970 µg/l	2/Month	Grab
1,4 Dioxane	---	200 µg/l	2/Month	Grab
Total Phenols	4.48 µg/l	200.8 µg/l	2/Month	Grab
Pentachlorophenol	0.04 µg/l ⁴	0.05 µg/l ⁴	2/Month	Grab
Total Phthalates	3 µg/l	190 µg/l	2/Month	Grab
Bis (2-Ethylhexyl) Phthalate	6 µg/l	6 µg/l	2/Month	Grab
Total Group I Polycyclic Aromatic Hydrocarbons	0.14 µg/l ⁴	1 µg/l	2/Month	Grab
Benzo (a) Anthracene	---	0.0038 µg/l ⁴	2/Month	Grab
Benzo (a) Pyrene	---	0.0038 µg/l ⁴	2/Month	Grab
Benzo (b) Fluoranthene	---	0.0038 µg/l ⁴	2/Month	Grab
Benzo (k) Fluoranthene	---	0.0038 µg/l ⁴	2/Month	Grab
Chrysene	---	0.0038 µg/l ⁴	2/Month	Grab
Dibenzo (a,h) anthracene	---	0.0038 µg/l ⁴	2/Month	Grab
Indeno (1,2,3-cd) Pyrene	---	0.0038 µg/l ⁴	2/Month	Grab
Total Group II Polycyclic Aromatic Hydrocarbons	0.14 µg/l ⁴	100 µg/l	2/Month	Grab
Acenaphthene	1.52 µg/l	1.9 µg/l	2/Month	Grab
Acenaphthylene	---	---	2/Month	Grab
Anthracene	32,000 µg/l	---	2/Month	Grab
Benzo (ghi) Perylene	---	---	2/Month	Grab
Fluoranthene	3.52 µg/l	159.2 µg/l	2/Month	Grab
Fluorene	4,240 µg/l	---	2/Month	Grab
Naphthalene	2.08 µg/l	20 µg/l	2/Month	Grab
Phenanthrene	---	---	2/Month	Grab
Pyrene	3,200 µg/l	---	2/Month	Grab
Total Polychlorinated Biphenyls	0.000064 µg/l ⁴	0.000064 µg/l ⁴	2/Month	Grab
Antimony (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Arsenic (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Cadmium (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Chromium III (trivalent, total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Chromium VI (hexavalent, total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Copper (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Lead (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Mercury (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Nickel (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Selenium (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab

Silver (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Zinc (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Iron (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
PFAS Analytes ⁶	--- ng/l	--- ng/l	2/Month	Grab

9. Category C - Petroleum Sites Containing Other Pollutants Discharging to saltwater receiving waters. During the period beginning the date of authorization to discharge and lasting until either the expiration of this general permit or termination of coverage, permittee(s) are authorized to discharge from an approved groundwater treatment system. Such discharges shall be limited and monitored by the permittee as specified below:

Effluent Characteristic	<u>Discharge Limitations</u>		Monitoring Requirement	
	Concentration - Specify Units		Measurement Frequency ^{1,2}	Sample Type
	<u>Average Monthly</u>	<u>Maximum Daily</u>		
Flow	--- GPM	xxx GPM	Continuous ³	Totalizer
Ammonia	---	---	2/Month	Grab
Ethanol ⁵	---	---	2/Month	Grab
Total Suspended Solids	---	30,000 µg/l	2/Month	Grab
Total Residual Chlorine	7.5 µg/l ⁴	13 µg/l	2/Month	Grab
Total Petroleum Hydrocarbons ⁷	---	1,000 µg/l	2/Month	Grab
Cyanide	0.8 µg/l ⁴	0.8 µg/l ⁴	2/Month	Grab
Benzene	5 µg/l	5 µg/l	2/Month	Grab
Toluene	12,000 µg/l	---	2/Month	Grab
Ethylbenzene	1,680 µg/l	---	2/Month	Grab
Total Xylenes (m,p,o)	---	---	2/Month	Grab
Total BTEX	100 µg/l	100 µg/l	2/Month	Grab
Ethylene dibromide	---	0.05 µg/l	2/Month	Grab
Methyl-t-Butyl Ether	---	70 µg/l	2/Month	Grab
tert-Amyl Methyl Ether	---	---	2/Month	Grab
Carbon Tetrachloride	4.4 µg/l	4.4 µg/l	2/Month	Grab
1,4 Dichlorobenzene	5 µg/l	5 µg/l	2/Month	Grab
1,2 Dichlorobenzene	600 µg/l	600 µg/l	2/Month	Grab
1,3 Dichlorobenzene	320 µg/l	320 µg/l	2/Month	Grab
Total Dichlorobenzene	---	763 µg/l	2/Month	Grab
1,1 Dichloroethane	---	70 µg/l	2/Month	Grab
1,2 Dichloroethane	5 µg/l	5 µg/l	2/Month	Grab
1,1 Dichloroethylene	3.2 µg/l	3.2 µg/l	2/Month	Grab
cis, 1,2 Dichloroethylene	---	70 µg/l	2/Month	Grab
Dichloromethane	---	4.6 µg/l	2/Month	Grab
Tetrachloroethylene	5 µg/l	5 µg/l	2/Month	Grab
1,1,1 Trichloroethane	---	200 µg/l	2/Month	Grab
1,1,2 Trichloroethane	5 µg/l	5 µg/l	2/Month	Grab
Trichloroethylene	5 µg/l	5 µg/l	2/Month	Grab
Vinyl Chloride	1.92 µg/l	2 µg/l	2/Month	Grab

Acetone	---	7,970 µg/l	2/Month	Grab
1,4 Dioxane	---	200 µg/l	2/Month	Grab
Total Phenols	300 µg/l	300 µg/l	2/Month	Grab
Pentachlorophenol	1 µg/l ⁴	1 µg/l ⁴	2/Month	Grab
Total Phthalates	3 µg/l	190 µg/l	2/Month	Grab
Bis (2-Ethylhexyl) Phthalate	6 µg/l	6 µg/l	2/Month	Grab
Total Group I Polycyclic Aromatic Hydrocarbons	0.14 µg/l ⁴	1 µg/l	2/Month	Grab
Benzo (a) Anthracene	0.0038 µg/l ⁴	0.0038 µg/l ⁴	2/Month	Grab
Benzo (a) Pyrene	0.0038 µg/l ⁴	0.0038 µg/l ⁴	2/Month	Grab
Benzo (b) Fluoranthene	0.0038 µg/l ⁴	0.0038 µg/l ⁴	2/Month	Grab
Benzo (k) Fluoranthene	0.0038 µg/l ⁴	0.0038 µg/l ⁴	2/Month	Grab
Chrysene	0.0038 µg/l ⁴	0.0038 µg/l ⁴	2/Month	Grab
Dibenzo (a,h) anthracene	0.0038 µg/l ⁴	0.0038 µg/l ⁴	2/Month	Grab
Indeno (1,2,3-cd) Pyrene	0.0038 µg/l ⁴	0.0038 µg/l ⁴	2/Month	Grab
Total Group II Polycyclic Aromatic Hydrocarbons	0.14 µg/l ⁴	100 µg/l	2/Month	Grab
Acenaphthene	1.9 µg/l	1.9 µg/l	2/Month	Grab
Acenaphthylene	---	---	2/Month	Grab
Anthracene	32,000 µg/l	---	2/Month	Grab
Benzo (ghi) Perylene	---	---	2/Month	Grab
Fluoranthene	112 µg/l	---	2/Month	Grab
Fluorene	4,240 µg/l	---	2/Month	Grab
Naphthalene	---	20 µg/l	2/Month	Grab
Phenanthrene	---	---	2/Month	Grab
Pyrene	3,200 µg/l	---	2/Month	Grab
Total Polychlorinated Biphenyls (PCBs)	0.000064 µg/l ⁴	0.000064 µg/l ⁴	2/Month	Grab
Antimony (total recoverable)	5.6 µg/l	5.6 µg/l	2/Month	Grab
Arsenic (total recoverable)	1.12 µg/l	55.2 µg/l	2/Month	Grab
Cadmium (total recoverable)	7.08 µg/l	10.2 µg/l	2/Month	Grab
Chromium III (trivalent, total recoverable)	100 µg/l	323 µg/l	2/Month	Grab
Chromium VI (hexavalent, total recoverable)	40.28 µg/l	323 µg/l	2/Month	Grab
Copper (total recoverable)	2.98 µg/l	4.62 µg/l	2/Month	Grab
Lead (Total Recoverable)	6.81 µg/l	160 µg/l	2/Month	Grab
Mercury (total recoverable)	0.12 µg/l	1.69 µg/l	2/Month	Grab
Nickel (total recoverable)	6.62 µg/l	59.79 µg/l	2/Month	Grab
Selenium (total recoverable)	56.91 µg/l	232.46 µg/l	2/Month	Grab

Silver (total recoverable)	1.78 µg/l	1.78 µg/l	2/Month	Grab
Zinc (total recoverable)	68.5 µg/l	76.11 µg/l	2/Month	Grab
Iron (total recoverable)	---	1,000 µg/l	2/Month	Grab
PFAS Analytes ⁶	--- ng/l	--- ng/l	2/Month	Grab

10. Discharge Category D – Sites Containing Volatile Organic Compound Only Discharging to Class AA receiving waters. During the period beginning the date of authorization to discharge and lasting until either the expiration of this general permit or termination of coverage, permittee(s) are authorized to discharge from an approved groundwater treatment system. Such discharges shall be limited and monitored by the permittee as specified below:

Effluent Characteristic	Discharge Limitations		Monitoring Requirement	
	Concentration - Specify Units		Measurement Frequency ^{1,2}	Sample Type
	Average Monthly	Maximum Daily		
Flow	--- GPM	xxx GPM	Continuous ³	Totalizer
Total Suspended Solids	---	30,000 µg/l	2/Month	Grab
Carbon Tetrachloride	1.84 µg/l	4.4 µg/l	2/Month	Grab
1,2 Dichlorobenzene	1.44 µg/l	63.2 µg/l	2/Month	Grab
1,3 Dichlorobenzene	6.96 µg/l	312 µg/l	2/Month	Grab
1,4 Dichlorobenzene	0.96 µg/l	5 µg/l	2/Month	Grab
Total Dichlorobenzene	---	763 µg/l	2/Month	Grab
1,1 Dichloroethane	---	70 µg/l	2/Month	Grab
1,2 Dichloroethane	3.04 µg/l	5 µg/l	2/Month	Grab
1,1 Dichloroethylene (DCE)	3.2 µg/l	3.2 µg/l	2/Month	Grab
cis 1,2 Dichloroethylene	---	70 µg/l	2/Month	Grab
Methylene Chloride	4.6 µg/l	4.6 µg/l	2/Month	Grab
Tetrachloroethylene	4.24 µg/l	5 µg/l	2/Month	Grab
1,1,1 Trichloroethane	---	200 µg/l	2/Month	Grab
1,1,2 Trichloroethane	4.72 µg/l	5 µg/l	2/Month	Grab
Trichloroethylene	5 µg/l	5 µg/l	2/Month	Grab
Vinyl Chloride	0.02 µg/l ⁴	2 µg/l	2/Month	Grab
Total Petroleum Hydrocarbons ⁷	---	1000 µg/l	2/Month	Grab
Total Phenols	4.48 µg/l	200.8 µg/l	2/Month	Grab
Pentachlorophenol	0.04 µg/l ⁴	0.05 µg/l ⁴	2/Month	Grab
Total Phthalates	3 µg/l	190 µg/l	2/Month	Grab
Bis (2-Ethylhexyl) Phthalate	6 µg/l	6 µg/l	2/Month	Grab
Total Polychlorinated Biphenyls (PCBs)	0.000064 µg/l ⁴	0.000064 µg/l ⁴	2/Month	Grab
Acetone	---	7970 µg/l	2/Month	Grab
1,4 Dioxane	---	200 µg/l	2/Month	Grab
Total BTEX	---	100 µg/l	2/Month	Grab
Iron (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab

11. Discharge Category D – Sites Containing Volatile Organic Compound Only Discharging to freshwater Non-Class AA receiving waters. During the period beginning the date of authorization to discharge and lasting until either the expiration of this general permit or termination of coverage, permittee(s) are authorized to discharge from an approved groundwater treatment system. Such discharges shall be limited and monitored by the permittee as specified below:

Effluent Characteristic	Discharge Limitations		Monitoring Requirement	
	Concentration – Specify Units			
	Average Monthly	Maximum Daily	Measurement Frequency ^{1,2}	Sample Type
Flow	--- GPM	xxx GPM	Continuous ³	Totalizer
Total Suspended Solids	---	30,000 µg/l	2/Month	Grab
Carbon Tetrachloride	4.4 µg/l	4.4 µg/l	2/Month	Grab
1,2 Dichlorobenzene	1.44 µg/l	63.2 µg/l	2/Month	Grab
1,3 Dichlorobenzene	6.96 µg/l	312 µg/l	2/Month	Grab
1,4 Dichlorobenzene	0.96 µg/l	5 µg/l	2/Month	Grab
Total Dichlorobenzene	---	763 µg/l	2/Month	Grab
1,1 Dichloroethane	---	70 µg/l	2/Month	Grab
1,2 Dichloroethane	5 µg/l	5 µg/l	2/Month	Grab
1,1 Dichloroethylene	3.2 µg/l	3.2 µg/l	2/Month	Grab
cis- 1,2 Dichloroethylene	---	70 µg/l	2/Month	Grab
Methylene Chloride	4.6 µg/l	4.6 µg/l	2/Month	Grab
Tetrachloroethylene	4.24 µg/l	5 µg/l	2/Month	Grab
1,1,1 Trichloroethane	---	200 µg/l	2/Month	Grab
1,1,2 Trichloroethane	5 µg/l	5 µg/l	2/Month	Grab
Trichloroethylene	5 µg/l	5 µg/l	2/Month	Grab
Vinyl Chloride	1.92 µg/l	2 µg/l	2/Month	Grab
Total Petroleum Hydrocarbons ⁷	---	1,000 µg/l	2/Month	Grab
Total Phenols	4.48 µg/l	200.8 µg/l	2/Month	Grab
Pentachlorophenol	0.04 µg/l ⁴	0.05 µg/l ⁴	2/Month	Grab
Total Phthalates	3 µg/l	190 µg/l	2/Month	Grab
Bis (2-Ethylhexyl) Phthalate	6 µg/l	6 µg/l	2/Month	Grab
Total Polychlorinated Biphenyls (PCBs)	0.000064 µg/l ⁴	0.000064 µg/l ⁴	2/Month	Grab
Acetone	---	7,970 µg/l	2/Month	Grab
1,4 Dioxane	---	200 µg/l	2/Month	Grab
Total BTEX	---	100 µg/l	2/Month	Grab
Iron (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab

12. Discharge Category D – Sites Containing Volatile Organic Compound Only Discharging to saltwater receiving waters. During the period beginning the date of authorization to discharge and lasting until either the expiration of this general permit or termination of coverage, permittee(s) are authorized to discharge from an approved groundwater treatment system. Such discharges shall be limited and monitored by the permittee as specified below:

Effluent Characteristic	Discharge Limitations Concentration – Specify Units		Monitoring Requirement	
	Average <u>Monthly</u>	Maximum <u>Daily</u>	Measurement <u>Frequency</u> ^{1,2}	Sample <u>Type</u>
Flow	--- GPM	xxx GPM	Continuous ³	Totalizer
Total Suspended Solids	---	30,000 µg/l	2/Month	Grab
Carbon Tetrachloride	4.4 µg/l	4.4 µg/l	2/Month	Grab
1,2 Dichlorobenzene	600 µg/l	600 µg/l	2/Month	Grab
1,3 Dichlorobenzene	320 µg/l	320 µg/l	2/Month	Grab
1,4 Dichlorobenzene	5 µg/l	5 µg/l	2/Month	Grab
Total Dichlorobenzene	---	763 µg/l	2/Month	Grab
1,1 Dichloroethane	---	70 µg/l	2/Month	Grab
1,2 Dichloroethane	5 µg/l	5 µg/l	2/Month	Grab
1,1 Dichloroethylene	3.2 µg/l	3.2 µg/l	2/Month	Grab
cis – 1,2 Dichloroethylene	---	70 µg/l	2/Month	Grab
Methylene Chloride	4.6 µg/l	4.6 µg/l	2/Month	Grab
Tetrachloroethylene	5 µg/l	5 µg/l	2/Month	Grab
1,1,1 Trichloroethane	---	200 µg/l	2/Month	Grab
1,1,2 Trichloroethane	5 µg/l	5 µg/l	2/Month	Grab
Trichloroethylene	5 µg/l	5 µg/l	2/Month	Grab
Vinyl Chloride	1.92 µg/l	2 µg/l	2/Month	Grab
Total Petroleum Hydrocarbons ⁷	---	1,000 µg/l	2/Month	Grab
Total Phenols	300 µg/l	300 µg/l	2/Month	Grab
Pentachlorophenol	1 µg/l ⁴	1 µg/l ⁴	2/Month	Grab
Total Phthalates	3 µg/l	190 µg/l	2/Month	Grab
Bis (2-Ethylhexyl) Phthalate	6 µg/l	6 µg/l	2/Month	Grab
Total Polychlorinated Biphenyls (PCBs)	0.000064 µg/l ⁴	0.000064 µg/l ⁴	2/Month	Grab
Acetone	---	7,970 µg/l	2/Month	Grab
1,4 Dioxane	---	200 µg/l	2/Month	Grab
Total BTEX	100 µg/l	100 µg/l	2/Month	Grab
Iron (total recoverable)	---	1,000 µg/l	2/Month	Grab

13. Discharge Category E – Sites Containing Volatile Organic Compounds and Other Contaminants Discharging to Class AA receiving waters. During the period beginning the date of authorization to discharge and lasting until either the expiration of this general permit or termination of coverage, permittee(s) are authorized to discharge from an approved groundwater treatment system. Such discharges shall be limited and monitored by the permittee as specified below:

Effluent Characteristic	Discharge Limitations		Monitoring Requirement	
	Concentration – Specify Units		Measurement Frequency ^{1,2}	Sample Type
	Average Monthly	Maximum Daily		
Flow	--- GPM	xxx GPM	Continuous ³	Totalizer
Ammonia	---	---	2/Month	Grab
Ethanol ⁵	---	---	2/Month	Grab
Total Suspended Solids	---	30,000 µg/l	2/Month	Grab
Total Residual Chlorine	11 µg/l	19 µg/l	2/Month	Grab
Total Petroleum Hydrocarbons ⁷	---	1,000 µg/l	2/Month	Grab
Cyanide	4.16 µg/l ⁴	17.6 µg/l	2/Month	Grab
Benzene	4.72 µg/l	5 µg/l	2/Month	Grab
Toluene	11.2 µg/l	508 µg/l	2/Month	Grab
Ethylbenzene	28.8 µg/l	1,280 µg/l	2/Month	Grab
(m,p,o) Xylenes	2.4 µg/l	106.4 µg/l	2/Month	Grab
Total BTEX	---	100 µg/l	2/Month	Grab
Ethylene dibromide	---	0.05 µg/l	2/Month	Grab
Methyl-t-Butyl Ether	---	70 µg/l	2/Month	Grab
tert-Amyl Methyl Ether	---	---	2/Month	Grab
Carbon Tetrachloride	1.84 µg/l	4.4 µg/l	2/Month	Grab
1,4 Dichlorobenzene	0.96 µg/l	5 µg/l	2/Month	Grab
1,2 Dichlorobenzene	1.44 µg/l	63.2 µg/l	2/Month	Grab
1,3 Dichlorobenzene	6.96 µg/l	312 µg/l	2/Month	Grab
Total Dichlorobenzene	---	763 µg/l	2/Month	Grab
1,1 Dichloroethane	---	70 µg/l	2/Month	Grab
1,2 Dichloroethane	3.04 µg/l	5 µg/l	2/Month	Grab
1,1 Dichloroethylene	3.2 µg/l	3.2 µg/l	2/Month	Grab
cis – 1,2 Dichloroethylene	---	70 µg/l	2/Month	Grab
Dichloromethane	---	4.6 µg/l	2/Month	Grab
Tetrachloroethylene	4.24 µg/l	5 µg/l	2/Month	Grab
1,1,1 Trichloroethane	---	200 µg/l	2/Month	Grab
1,1,2 Trichloroethane	4.72 µg/l	5 µg/l	2/Month	Grab
Trichloroethylene	5 µg/l	5 µg/l	2/Month	Grab
Vinyl Chloride	0.02 µg/l ⁴	2 µg/l	2/Month	Grab

Acetone	---	7,970 µg/l	2/Month	Grab
1,4 Dioxane	---	200 µg/l	2/Month	Grab
Total Phenols	4.48 µg/l	200.8 µg/l	2/Month	Grab
Pentachlorophenol	0.04 µg/l ⁴	0.05 µg/l ⁴	2/Month	Grab
Total Phthalates	3 µg/l	190 µg/l	2/Month	Grab
Bis (2-Ethylhexyl) Phthalate	6 µg/l	6 µg/l	2/Month	Grab
Total Group I Polycyclic Aromatic Hydrocarbons	0.03 µg/l ⁴	1 µg/l	2/Month	Grab
Benzo (a) Anthracene	---	0.0038 µg/l ⁴	2/Month	Grab
Benzo (a) Pyrene	---	0.0038 µg/l ⁴	2/Month	Grab
Benzo (b) Fluoranthene	---	0.0038 µg/l ⁴	2/Month	Grab
Benzo (k) Fluoranthene	---	0.0038 µg/l ⁴	2/Month	Grab
Chrysene	---	0.0038 µg/l ⁴	2/Month	Grab
Dibenzo (a,h) anthracene	---	0.0038 µg/l ⁴	2/Month	Grab
Indeno (1,2,3-cd) Pyrene	---	0.0038 µg/l ⁴	2/Month	Grab
Total Group II Polycyclic Aromatic Hydrocarbons	0.03 µg/l ⁴	100 µg/l	2/Month	Grab
Acenaphthene	1.52 µg/l	1.9 µg/l	2/Month	Grab
Acenaphthylene	---	---	2/Month	Grab
Anthracene	6,640 µg/l	---	2/Month	Grab
Benzo (ghi) Perylene	---	---	2/Month	Grab
Fluoranthene	3.52 µg/l	159.2 µg/l	2/Month	Grab
Fluorene	880 µg/l	---	2/Month	Grab
Naphthalene	2.08 µg/l	20 µg/l	2/Month	Grab
Phenanthrene	---	---	2/Month	Grab
Pyrene	664 µg/l	---	2/Month	Grab
Total Polychlorinated Biphenyls	0.000064 µg/l ⁴	0.000064 µg/l ⁴	2/Month	Grab
Antimony (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Arsenic (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Cadmium (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Chromium III (trivalent, total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Chromium VI (hexavalent, total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Copper (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Lead (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Mercury (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Nickel (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Selenium (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab

Silver (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Zinc (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Iron (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
PFAS Analytes ⁶	--- ng/l	--- ng/l	2/Month	Grab

14. Discharge Category E – Sites Containing Volatile Organic Compounds and Other Contaminants Discharging to freshwater Non-Class AA receiving waters. During the period beginning the date of authorization to discharge and lasting until either the expiration of this general permit or termination of coverage, permittee(s) are authorized to discharge from an approved groundwater treatment system. Such discharges shall be limited and monitored by the permittee as specified below:

Effluent Characteristic	Discharge Limitations Concentration - Specify Units		Monitoring Requirement	
	Average Monthly	Maximum Daily	Measurement Frequency ^{1,2}	Sample Type
Flow	--- GPM	xxx GPM	Continuous ³	Totalizer
Ammonia	---	---	2/Month	Grab
Ethanol ⁵	---	---	2/Month	Grab
Total Suspended Solids	---	30,000 µg/l	2/Month	Grab
Total Residual Chlorine	11 µg/l	19 µg/l	2/Month	Grab
Total Petroleum Hydrocarbons ⁷	---	1,000 µg/l	2/Month	Grab
Cyanide	4.16 µg/l ⁴	17.6 µg/l	2/Month	Grab
Benzene	4.72 µg/l	5 µg/l	2/Month	Grab
Toluene	11.2 µg/l	508 µg/l	2/Month	Grab
Ethylbenzene	28.8 µg/l	1,280 µg/l	2/Month	Grab
Total Xylenes (m,p,o)	2.4 µg/l	106.4 µg/l	2/Month	Grab
Total BTEX	---	100 µg/l	2/Month	Grab
Ethylene dibromide	---	0.05 µg/l	2/Month	Grab
Methyl-t-Butyl Ether	---	70 µg/l	2/Month	Grab
tert-Amyl Methyl Ether	---	---	2/Month	Grab
Carbon Tetrachloride	4.4 µg/l	4.4 µg/l	2/Month	Grab
1,4 Dichlorobenzene	0.96 µg/l	5 µg/l	2/Month	Grab
1,2 Dichlorobenzene	1.44 µg/l	63.2 µg/l	2/Month	Grab
1,3 Dichlorobenzene	6.96 µg/l	312 µg/l	2/Month	Grab
Total Dichlorobenzene	---	763 µg/l	2/Month	Grab
1,1 Dichloroethane	---	70 µg/l	2/Month	Grab
1,2 Dichloroethane	5 µg/l	5 µg/l	2/Month	Grab
1,1 Dichloroethylene	3.2 µg/l	3.2 µg/l	2/Month	Grab
cis-1,2 Dichloroethylene	---	70 µg/l	2/Month	Grab
Dichloromethane	---	4.6 µg/l	2/Month	Grab
Tetrachloroethylene	4.24 µg/l	5 µg/l	2/Month	Grab
1,1,1 Trichloroethane	---	200 µg/l	2/Month	Grab
1,1,2 Trichloroethane	5 µg/l	5 µg/l	2/Month	Grab
Trichloroethylene	5 µg/l	5 µg/l	2/Month	Grab
Vinyl Chloride	1.92 µg/l	2 µg/l	2/Month	Grab

Acetone	---	7,970 µg/l	2/Month	Grab
1,4 Dioxane	---	200 µg/l	2/Month	Grab
Total Phenols	4.48 µg/l	200.8 µg/l	2/Month	Grab
Pentachlorophenol	0.04 µg/l ⁴	0.05 µg/l ⁴	2/Month	Grab
Total Phthalates	3 µg/l	190 µg/l	2/Month	Grab
Bis (2-Ethylhexyl) Phthalate	6 µg/l	6 µg/l	2/Month	Grab
Total Group I Polycyclic Aromatic Hydrocarbons	0.14 µg/l ⁴	1 µg/l	2/Month	Grab
Benzo (a) Anthracene	---	0.0038 µg/l ⁴	2/Month	Grab
Benzo (a) Pyrene	---	0.0038 µg/l ⁴	2/Month	Grab
Benzo (b) Fluoranthene	---	0.0038 µg/l ⁴	2/Month	Grab
Benzo (k) Fluoranthene	---	0.0038 µg/l ⁴	2/Month	Grab
Chrysene	---	0.0038 µg/l ⁴	2/Month	Grab
Dibenzo (a,h) anthracene	---	0.0038 µg/l ⁴	2/Month	Grab
Indeno (1,2,3-cd) Pyrene	---	0.0038 µg/l ⁴	2/Month	Grab
Total Group II Polycyclic Aromatic Hydrocarbons	0.14 µg/l ⁴	100 µg/l	2/Month	Grab
Acenaphthene	1.52 µg/l	1.9 µg/l	2/Month	Grab
Acenaphthylene	---	---	2/Month	Grab
Anthracene	32,000 µg/l	---	2/Month	Grab
Benzo (ghi) Perylene	---	---	2/Month	Grab
Fluoranthene	3.52 µg/l	159.2 µg/l	2/Month	Grab
Fluorene	4,240 µg/l	---	2/Month	Grab
Naphthalene	2.08 µg/l	20 µg/l	2/Month	Grab
Phenanthrene	---	---	2/Month	Grab
Pyrene	3,200 µg/l	---	2/Month	Grab
Total Polychlorinated Biphenyls (PCBs)	0.000064 µg/l ⁴	0.000064 µg/l ⁴	2/Month	Grab
Antimony (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Arsenic (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Cadmium (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Chromium III (trivalent, total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Chromium VI (hexavalent, total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Copper (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Lead (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Mercury (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Nickel (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Selenium (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab

Silver (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Zinc (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Iron (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
PFAS Analytes ⁶	--- ng/l	--- ng/l	2/Month	Grab

15. Discharge Category E – Sites Containing Volatile Organic Compounds and Other Contaminants Discharging to saltwater receiving waters. During the period beginning the date of authorization to discharge and lasting until either the expiration of this general permit or termination of coverage, permittee(s) are authorized to discharge from an approved groundwater treatment system. Such discharges shall be limited and monitored by the permittee as specified below:

Effluent Characteristic	Discharge Limitations Concentration - Specify Units		Monitoring Requirement	
	Average Monthly	Maximum Daily	Measurement Frequency ^{1,2}	Sample Type
Flow	--- GPM	xxx GPM	Continuous ³	Totalizer
Ammonia	---	---	2/Month	Grab
Ethanol ⁵	---	---	2/Month	Grab
Total Suspended Solids	---	30,000 µg/l	2/Month	Grab
Total Residual Chlorine	7.5 µg/l ⁴	13 µg/l	2/Month	Grab
Total Petroleum Hydrocarbons ⁷	---	1000 µg/l	2/Month	Grab
Cyanide	0.8 µg/l ⁴	0.8 µg/l ⁴	2/Month	Grab
Benzene	5 µg/l	5 µg/l	2/Month	Grab
Toluene	12,000 µg/l	---	2/Month	Grab
Ethylbenzene	1,680 µg/l	---	2/Month	Grab
Total Xylenes (m,p,o)	---	---	2/Month	Grab
Total BTEX	100 µg/l	100 µg/l	2/Month	Grab
Ethylene dibromide	---	0.05 µg/l	2/Month	Grab
Methyl-t-Butyl Ether	---	70 µg/l	2/Month	Grab
tert-Amyl Methyl Ether	---	---	2/Month	Grab
Carbon Tetrachloride	4.4 µg/l	4.4 µg/l	2/Month	Grab
1,4 Dichlorobenzene	5 µg/l	5 µg/l	2/Month	Grab
1,2 Dichlorobenzene	600 µg/l	600 µg/l	2/Month	Grab
1,3 Dichlorobenzene	320 µg/l	320 µg/l	2/Month	Grab
Total Dichlorobenzene	---	763 µg/l	2/Month	Grab
1,1 Dichloroethane	---	70 µg/l	2/Month	Grab
1,2 Dichloroethane	5 µg/l	5 µg/l	2/Month	Grab
1,1 Dichloroethylene	3.2 µg/l	3.2 µg/l	2/Month	Grab
cis-1,2 Dichloroethylene	---	70 µg/l	2/Month	Grab
Dichloromethane	---	4.6 µg/l	2/Month	Grab
Tetrachloroethylene	5 µg/l	5 µg/l	2/Month	Grab
1,1,1 Trichloroethane	---	200 µg/l	2/Month	Grab
1,1,2 Trichloroethane	5 µg/l	5 µg/l	2/Month	Grab
Trichloroethylene	5 µg/l	5 µg/l	2/Month	Grab
Vinyl Chloride	1.92 µg/l	2 µg/l	2/Month	Grab

Acetone	---	7,970 µg/l	2/Month	Grab
1,4 Dioxane	---	200 µg/l	2/Month	Grab
Total Phenols	300 µg/l	300 µg/l	2/Month	Grab
Pentachlorophenol	1 µg/l ⁴	1 µg/l ⁴	2/Month	Grab
Total Phthalates	3 µg/l	190 µg/l	2/Month	Grab
Bis (2-Ethylhexyl) Phthalate	6 µg/l	6 µg/l	2/Month	Grab
Total Group I Polycyclic Aromatic Hydrocarbons	0.14 µg/l ⁴	1 µg/l	2/Month	Grab
Benzo (a) Anthracene	0.0038 µg/l ⁴	0.0038 µg/l ⁴	2/Month	Grab
Benzo (a) Pyrene	0.0038 µg/l ⁴	0.0038 µg/l ⁴	2/Month	Grab
Benzo (b) Fluoranthene	0.0038 µg/l ⁴	0.0038 µg/l ⁴	2/Month	Grab
Benzo (k) Fluoranthene	0.0038 µg/l ⁴	0.0038 µg/l ⁴	2/Month	Grab
Chrysene	0.0038 µg/l ⁴	0.0038 µg/l ⁴	2/Month	Grab
Dibenzo (a,h) anthracene	0.0038 µg/l ⁴	0.0038 µg/l ⁴	2/Month	Grab
Indeno (1,2,3-cd) Pyrene	0.0038 µg/l ⁴	0.0038 µg/l ⁴	2/Month	Grab
Total Group II Polycyclic Aromatic Hydrocarbons	0.14 µg/l ⁴	100 µg/l	2/Month	Grab
Acenaphthene	1.9 µg/l	1.9 µg/l	2/Month	Grab
Acenaphthylene	---	---	2/Month	Grab
Anthracene	32,000 µg/l	---	2/Month	Grab
Benzo (ghi) Perylene	---	---	2/Month	Grab
Fluoranthene	112 µg/l	---	2/Month	Grab
Fluorene	4,240 µg/l	---	2/Month	Grab
Naphthalene	---	20 µg/l	2/Month	Grab
Phenanthrene	---	---	2/Month	Grab
Pyrene	3,200 µg/l	---	2/Month	Grab
Total Polychlorinated Biphenyls (PCBs)	0.000064 µg/l ⁴	0.000064 µg/l ⁴	2/Month	Grab
Antimony (total recoverable)	5.6 µg/l	5.6 µg/l	2/Month	Grab
Arsenic (total recoverable)	1.12 µg/l	55.2 µg/l	2/Month	Grab
Cadmium (total recoverable)	7.08 µg/l	10.2 µg/l	2/Month	Grab
Chromium III (trivalent, total recoverable)	100 µg/l	323 µg/l	2/Month	Grab
Chromium VI (hexavalent, total recoverable)	40.28 µg/l	323 µg/l	2/Month	Grab
Copper (total recoverable)	2.98 µg/l	4.62 µg/l	2/Month	Grab
Lead (Total Recoverable)	6.81 µg/l	160 µg/l	2/Month	Grab
Mercury (total recoverable)	0.12 µg/l	1.69 µg/l	2/Month	Grab
Nickel (total recoverable)	6.62 µg/l	59.79 µg/l	2/Month	Grab
Selenium (total recoverable)	56.91 µg/l	232.46 µg/l	2/Month	Grab

Silver (total recoverable)	1.78 µg/l	1.78 µg/l	2/Month	Grab
Zinc (total recoverable)	68.5 µg/l	76.11 µg/l	2/Month	Grab
Iron (total recoverable)	---	1,000 µg/l	2/Month	Grab
PFAS Analytes ⁶	--- ng/l	--- ng/l	2/Month	Grab

16. Discharge Category F – Sites Containing Primarily Metals Discharging to Class AA receiving waters. During the period beginning the date of authorization to discharge and lasting until either the expiration of this general permit or termination of coverage, permittee(s) are authorized to discharge from an approved groundwater treatment system. Such discharges shall be limited and monitored by the permittee as specified below:

Effluent Characteristic	Discharge Limitations Concentration - Specify Units		Monitoring Requirement	
	Average Monthly	Maximum Daily	Measurement Frequency ^{1,2}	Sample Type
Flow	--- GPM	xxx GPM	Continuous ³	Totalizer
Antimony (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Arsenic (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Cadmium (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Chromium III (trivalent, total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Chromium VI (hexavalent, total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Copper (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Lead (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Mercury (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Nickel (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Selenium (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Silver (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Zinc (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Iron (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Cyanide	4.16 µg/l ⁴	17.6 µg/l	2/Month	Grab
Carbon Tetrachloride	1.84 µg/l	4.4 µg/l	2/Month	Grab
1,2 Dichlorobenzene	1.44 µg/l	63.2 µg/l	2/Month	Grab
1,3 Dichlorobenzene	6.96 µg/l	312 µg/l	2/Month	Grab
1,4 Dichlorobenzene	0.96 µg/l	5 µg/l	2/Month	Grab
Total Dichlorobenzene	---	763 µg/l	2/Month	Grab
1,1 Dichloroethane	---	70 µg/l	2/Month	Grab
1,2 Dichloroethane	3.04 µg/l	5 µg/l	2/Month	Grab
1,1 Dichloroethylene	3.2 µg/l	3.2 µg/l	2/Month	Grab
cis 1,2 Dichloroethylene	---	70 µg/l	2/Month	Grab
Methylene Chloride	4.6 µg/l	4.6 µg/l	2/Month	Grab
Tetrachloroethylene	4.24 µg/l	5 µg/l	2/Month	Grab
1,1,1 Trichloroethane	---	200 µg/l	2/Month	Grab
1,1,2 Trichloroethane	4.72 µg/l	5 µg/l	2/Month	Grab
Trichloroethylene	5 µg/l	5 µg/l	2/Month	Grab

Vinyl Chloride	0.02 µg/l ⁴	2 µg/l	2/Month	Grab
Total Suspended Solids	---	30,000 µg/l	2/Month	Grab

17. Discharge Category F – Sites Containing Primarily Metals Discharging to freshwater Non-Class AA receiving waters. During the period beginning the date of authorization to discharge and lasting until either the expiration of this general permit or termination of coverage, permittee(s) are authorized to discharge from an approved groundwater treatment system. Such discharges shall be limited and monitored by the permittee as specified below:

Effluent Characteristic	Discharge Limitations Concentration - Specify Units		Monitoring Requirement	
	Average <u>Monthly</u>	Maximum <u>Daily</u>	Measurement <u>Frequency</u> ^{1,2}	Sample <u>Type</u>
Flow	--- GPM	xxx GPM	Continuous ³	Totalizer
Antimony (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Arsenic (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Cadmium (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Chromium III (trivalent, total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Chromium VI (hexavalent, total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Copper (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Lead (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Mercury (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Nickel (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Selenium (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Silver (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Zinc (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Iron (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Cyanide	4.16 µg/l ⁴	17.6 µg/l	2/Month	Grab
Carbon Tetrachloride	4.4 µg/l	4.4 µg/l	2/Month	Grab
1,2 Dichlorobenzene	1.44 µg/l	63.2 µg/l	2/Month	Grab
1,3 Dichlorobenzene	6.96 µg/l	312 µg/l	2/Month	Grab
1,4 Dichlorobenzene	0.96 µg/l	5 µg/l	2/Month	Grab
Total Dichlorobenzene	---	763 µg/l	2/Month	Grab
1,1 Dichloroethane	---	70 µg/l	2/Month	Grab
1,2 Dichloroethane	5 µg/l	5 µg/l	2/Month	Grab
1,1 Dichloroethylene	3.2 µg/l	3.2 µg/l	2/Month	Grab
cis-1,2 Dichloroethylene	---	70 µg/l	2/Month	Grab
Methylene Chloride	4.6 µg/l	4.6 µg/l	2/Month	Grab
Tetrachloroethylene	4.24 µg/l	5 µg/l	2/Month	Grab
1,1,1 Trichloroethane	---	200 µg/l	2/Month	Grab
1,1,2 Trichloroethane	5 µg/l	5 µg/l	2/Month	Grab

Trichloroethylene	5 µg/l	5 µg/l	2/Month	Grab
Vinyl Chloride	1.92 µg/l	2 µg/l	2/Month	Grab
Total Suspended Solids	---	30,000 µg/l	2/Month	Grab

18. Discharge Category F – Sites Containing Primarily Metals Discharging to saltwater receiving waters. During the period beginning the date of authorization to discharge and lasting until either the expiration of this general permit or termination of coverage, permittee(s) are authorized to discharge from an approved groundwater treatment system. Such discharges shall be limited and monitored by the permittee as specified below:

Effluent Characteristic	Discharge Limitations Concentration - Specify Units		Monitoring Requirement	
	Average <u>Monthly</u>	Maximum <u>Daily</u>	Measurement <u>Frequency</u> ^{1,2}	Sample <u>Type</u>
Flow	--- GPM	xxx GPM	Continuous ³	Totalizer
Antimony (total recoverable)	5.6 µg/l	5.6 µg/l	2/Month	Grab
Arsenic (total recoverable)	1.12 µg/l	55.2 µg/l	2/Month	Grab
Cadmium (total recoverable)	7.08 µg/l	10.2 µg/l	2/Month	Grab
Chromium III (trivalent, total recoverable)	100 µg/l	323 µg/l	2/Month	Grab
Chromium VI (hexavalent, total recoverable)	40.28 µg/l	323 µg/l	2/Month	Grab
Copper (total recoverable)	2.98 µg/l	4.62 µg/l	2/Month	Grab
Lead (Total Recoverable)	6.81 µg/l	160 µg/l	2/Month	Grab
Mercury (total recoverable)	0.12 µg/l	1.69 µg/l	2/Month	Grab
Nickel (total recoverable)	6.62 µg/l	59.79 µg/l	2/Month	Grab
Selenium (total recoverable)	56.91 µg/l	232.46 µg/l	2/Month	Grab
Silver (total recoverable)	1.78 µg/l	1.78 µg/l	2/Month	Grab
Zinc (total recoverable)	68.5 µg/l	76.11 µg/l	2/Month	Grab
Iron (total recoverable)	---	1000 µg/l	2/Month	Grab
Cyanide	0.8 µg/l ⁴	0.8 µg/l ⁴	2/Month	Grab
Carbon Tetrachloride	4.4 µg/l	4.4 µg/l	2/Month	Grab
1,2 (or o) Dichlorobenzene	600 µg/l	600 µg/l	2/Month	Grab
1,3 (or m) Dichlorobenzene	320 µg/l	320 µg/l	2/Month	Grab
1,4 (or p) Dichlorobenzene	5 µg/l	5 µg/l	2/Month	Grab
Total Dichlorobenzene	---	763 µg/l	2/Month	Grab
1,1 Dichloroethane	---	70 µg/l	2/Month	Grab
1,2 Dichloroethane	5 µg/l	5 µg/l	2/Month	Grab
1,1 Dichloroethylene	3.2 µg/l	3.2 µg/l	2/Month	Grab
cis-1,2 Dichloroethylene	---	70 µg/l	2/Month	Grab
Methylene Chloride	4.6 µg/l	4.6 µg/l	2/Month	Grab
Tetrachloroethylene	5 µg/l	5 µg/l	2/Month	Grab
1,1,1 Trichloroethane	---	200 µg/l	2/Month	Grab
1,1,2 Trichloroethane	5 µg/l	5 µg/l	2/Month	Grab

Trichloroethylene	5 µg/l	5 µg/l	2/Month	Grab
Vinyl Chloride	1.92 µg/l	2 µg/l	2/Month	Grab
Total Suspended Solids	---	30,000 µg/l	2/Month	Grab

19. Category G – Contaminated Construction Dewatering Sites Discharging to Class AA receiving waters. During the period beginning the date of authorization to discharge and lasting until either the expiration of this general permit or termination of coverage, permittee(s) are authorized to discharge from an approved groundwater treatment system. Such discharges shall be limited and monitored by the permittee as specified below:

Effluent Characteristic	Discharge Limitations Concentration - Specify Units		Monitoring Requirement	
	Average Monthly	Maximum Daily	Measurement Frequency ^{1,2}	Sample Type
Flow	--- GPM	xxx GPM	Continuous ³	Totalizer
Ammonia	---	---	2/Month	Grab
Ethanol ⁵	---	---	2/Month	Grab
Total Suspended Solids	---	30000 µg/l	2/Month	Grab
Total Residual Chlorine	11 µg/l	19 µg/l	2/Month	Grab
Total Petroleum Hydrocarbons ⁷	---	1000 µg/l	2/Month	Grab
Cyanide	4.16 µg/l ⁴	17.6 µg/l	2/Month	Grab
Benzene	4.72 µg/l	5 µg/l	2/Month	Grab
Toluene	11.2 µg/l	508 µg/l	2/Month	Grab
Ethylbenzene	28.8 µg/l	1280 µg/l	2/Month	Grab
Total Xylenes (m,p,o)	2.4 µg/l	106.4 µg/l	2/Month	Grab
Total BTEX	---	100 µg/l	2/Month	Grab
Ethylene dibromide	---	0.05 µg/l	2/Month	Grab
Methyl t Butyl Ether	---	70 µg/l	2/Month	Grab
Tert Amyl Methyl Ether	---	---	2/Month	Grab
Carbon Tetrachloride	1.84 µg/l	4.4 µg/l	2/Month	Grab
1,4 Dichlorobenzene	0.96 µg/l	5 µg/l	2/Month	Grab
1,2 Dichlorobenzene	1.44 µg/l	63.2 µg/l	2/Month	Grab
1,3 Dichlorobenzene	6.96 µg/l	312 µg/l	2/Month	Grab
Total Dichlorobenzene	---	763 µg/l	2/Month	Grab
1,1 Dichloroethane	---	70 µg/l	2/Month	Grab
1,2 Dichloroethane	3.04 µg/l	5 µg/l	2/Month	Grab
1,1 Dichloroethylene	3.2 µg/l	3.2 µg/l	2/Month	Grab
cis - 1,2 Dichloroethylene	---	70 µg/l	2/Month	Grab
Dichloromethane	---	4.6 µg/l	2/Month	Grab
Tetrachloroethylene	4.24 µg/l	5 µg/l	2/Month	Grab
1,1,1 Trichloroethane	---	200 µg/l	2/Month	Grab
1,1,2 Trichloroethane	4.72 µg/l	5 µg/l	2/Month	Grab
Trichloroethylene	5 µg/l	5 µg/l	2/Month	Grab
Vinyl Chloride	0.02 µg/l ⁴	2 µg/l	2/Month	Grab

Acetone	---	7970 µg/l	2/Month	Grab
1,4 Dioxane	---	200 µg/l	2/Month	Grab
Total Phenols	4.48 µg/l	200.8 µg/l	2/Month	Grab
Pentachlorophenol	0.04 µg/l ⁴	0.05 µg/l ⁴	2/Month	Grab
Total Phthalates	3 µg/l	190 µg/l	2/Month	Grab
Bis (2-Ethylhexyl) Phthalate	6 µg/l	6 µg/l	2/Month	Grab
Total Group I Polycyclic Aromatic Hydrocarbons	0.03 µg/l ⁴	1 µg/l	2/Month	Grab
Benzo (a) Anthracene	---	0.0038 µg/l ⁴	2/Month	Grab
Benzo (a) Pyrene	---	0.0038 µg/l ⁴	2/Month	Grab
Benzo (b) Fluoranthene	---	0.0038 µg/l ⁴	2/Month	Grab
Benzo (k) Fluoranthene	---	0.0038 µg/l ⁴	2/Month	Grab
Chrysene	---	0.0038 µg/l ⁴	2/Month	Grab
Dibenzo (a,h) anthracene	---	0.0038 µg/l ⁴	2/Month	Grab
Indeno (1,2,3-cd) Pyrene	---	0.0038 µg/l ⁴	2/Month	Grab
Total Group II Polycyclic Aromatic Hydrocarbons	0.03 µg/l ⁴	100 µg/l	2/Month	Grab
Acenaphthene	1.52 µg/l	1.9 µg/l	2/Month	Grab
Acenaphthylene	---	---	2/Month	Grab
Anthracene	6640 µg/l	---	2/Month	Grab
Benzo (ghi) Perylene	---	---	2/Month	Grab
Fluoranthene	3.52 µg/l	159.2 µg/l	2/Month	Grab
Fluorene	880 µg/l	---	2/Month	Grab
Naphthalene	2.08 µg/l	20 µg/l	2/Month	Grab
Phenanthrene	---	---	2/Month	Grab
Pyrene	664 µg/l	---	2/Month	Grab
Total Polychlorinated Biphenyls	0.000064 µg/l ⁴	0.000064 µg/l ⁴	2/Month	Grab
Antimony (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Arsenic (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Cadmium (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Chromium III (trivalent, total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Chromium VI (hexavalent, total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Copper (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Lead (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Mercury (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Nickel (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Selenium (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab

Silver (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Zinc (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Iron (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
PFAS Analytes ⁶	--- ng/l	--- ng/l	2/Month	Grab

20. Category G – Contaminated Construction Dewatering Sites Discharging to freshwater Non-Class AA receiving waters. During the period beginning the date of authorization to discharge and lasting until either the expiration of this general permit or termination of coverage, permittee(s) are authorized to discharge from an approved groundwater treatment system. Such discharges shall be limited and monitored by the permittee as specified below:

Effluent Characteristic	Discharge Limitations Concentration - Specify Units		Monitoring Requirement	
	Average Monthly	Maximum Daily	Measurement Frequency ^{1,2}	Sample Type
Flow	--- GPM	xxx GPM	Continuous ³	Totalizer
Ammonia	---	---	2/Month	Grab
Ethanol ⁵	---	---	2/Month	Grab
Total Suspended Solids	---	30,000 µg/l	2/Month	Grab
Total Residual Chlorine	11 µg/l	19 µg/l	2/Month	Grab
Total Petroleum Hydrocarbons ⁷	---	1,000 µg/l	2/Month	Grab
Cyanide	4.16 µg/l ⁴	17.6 µg/l	2/Month	Grab
Benzene	4.72 µg/l	5 µg/l	2/Month	Grab
Toluene	11.2 µg/l	508 µg/l	2/Month	Grab
Ethylbenzene	28.8 µg/l	1,280 µg/l	2/Month	Grab
Total Xylenes (m,p,o)	2.4 µg/l	106.4 µg/l	2/Month	Grab
Total BTEX	---	100 µg/l	2/Month	Grab
Ethylene dibromide	---	0.05 µg/l	2/Month	Grab
Methyl- t- Butyl Ether	---	70 µg/l	2/Month	Grab
tert-Amyl Methyl Ether	---	---	2/Month	Grab
Carbon Tetrachloride	4.4 µg/l	4.4 µg/l	2/Month	Grab
1,4 Dichlorobenzene	0.96 µg/l	5 µg/l	2/Month	Grab
1,2 Dichlorobenzene	1.44 µg/l	63.2 µg/l	2/Month	Grab
1,3 Dichlorobenzene	6.96 µg/l	312 µg/l	2/Month	Grab
Total Dichlorobenzene	---	763 µg/l	2/Month	Grab
1,1 Dichloroethane	---	70 µg/l	2/Month	Grab
1,2 Dichloroethane	5 µg/l	5 µg/l	2/Month	Grab
1,1 Dichloroethylene	3.2 µg/l	3.2 µg/l	2/Month	Grab
Cis - 1,2 Dichloroethylene	---	70 µg/l	2/Month	Grab
Dichloromethane	---	4.6 µg/l	2/Month	Grab
Tetrachloroethylene	4.24 µg/l	5 µg/l	2/Month	Grab
1,1,1 Trichloroethane	---	200 µg/l	2/Month	Grab
1,1,2 Trichloroethane	5 µg/l	5 µg/l	2/Month	Grab
Trichloroethylene	5 µg/l	5 µg/l	2/Month	Grab
Vinyl Chloride	1.92 µg/l	2 µg/l	2/Month	Grab

Acetone	---	7,970 µg/l	2/Month	Grab
1,4 Dioxane	---	200 µg/l	2/Month	Grab
Total Phenols	4.48 µg/l	200.8 µg/l	2/Month	Grab
Pentachlorophenol	0.04 µg/l ⁴	0.05 µg/l ⁴	2/Month	Grab
Total Phthalates	3 µg/l	190 µg/l	2/Month	Grab
Bis (2-Ethylhexyl) Phthalate	6 µg/l	6 µg/l	2/Month	Grab
Total Group I Polycyclic Aromatic Hydrocarbons	0.14 µg/l ⁴	1 µg/l	2/Month	Grab
Benzo (a) Anthracene	---	0.0038 µg/l ⁴	2/Month	Grab
Benzo (a) Pyrene	---	0.0038 µg/l ⁴	2/Month	Grab
Benzo (b) Fluoranthene	---	0.0038 µg/l ⁴	2/Month	Grab
Benzo (k) Fluoranthene	---	0.0038 µg/l ⁴	2/Month	Grab
Chrysene	---	0.0038 µg/l ⁴	2/Month	Grab
Dibenzo (a,h) anthracene	---	0.0038 µg/l ⁴	2/Month	Grab
Indeno (1,2,3-cd) Pyrene	---	0.0038 µg/l ⁴	2/Month	Grab
Total Group II Polycyclic Aromatic Hydrocarbons	0.14 µg/l ⁴	100 µg/l	2/Month	Grab
Acenaphthene	1.52 µg/l	1.9 µg/l	2/Month	Grab
Acenaphthylene	---	---	2/Month	Grab
Anthracene	32,000 µg/l	---	2/Month	Grab
Benzo (ghi) Perylene	---	---	2/Month	Grab
Fluoranthene	3.52 µg/l	159.2 µg/l	2/Month	Grab
Fluorene	4,240 µg/l	---	2/Month	Grab
Naphthalene	2.08 µg/l	20 µg/l	2/Month	Grab
Phenanthrene	---	---	2/Month	Grab
Pyrene	3,200 µg/l	---	2/Month	Grab
Total Polychlorinated Biphenyls (PCBs)	0.000064 µg/l ⁴	0.000064 µg/l ⁴	2/Month	Grab
Antimony (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Arsenic (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Cadmium (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Chromium III (trivalent, total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Chromium VI (hexavalent, total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Copper (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Lead (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Mercury (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Nickel (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Selenium (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab

Silver (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Zinc (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Iron (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
PFAS Analytes ⁶	--- ng/l	--- ng/l	2/Month	Grab

21. Category G – Contaminated Construction Dewatering Sites Discharging to saltwater receiving waters. During the period beginning the date of authorization to discharge and lasting until either the expiration of this general permit or termination of coverage, permittee(s) are authorized to discharge from an approved groundwater treatment system. Such discharges shall be limited and monitored by the permittee as specified below:

Effluent Characteristic	Discharge Limitations Concentration - Specify Units		Monitoring Requirement	
	Average Monthly	Maximum Daily	Measurement Frequency ^{1,2}	Sample Type
Flow	--- GPM	xxx GPM	Continuous ³	Totalizer
Ammonia	---	---	2/Month	Grab
Ethanol ⁵	---	---	2/Month	Grab
Total Suspended Solids	---	30,000 µg/l	2/Month	Grab
Total Residual Chlorine	7.5 µg/l ⁴	13 µg/l	2/Month	Grab
Total Petroleum Hydrocarbons ⁷	---	1,000 µg/l	2/Month	Grab
Cyanide	0.8 µg/l ⁴	0.8 µg/l ⁴	2/Month	Grab
Benzene	5 µg/l	5 µg/l	2/Month	Grab
Toluene	12,000 µg/l	---	2/Month	Grab
Ethylbenzene	1,680 µg/l	---	2/Month	Grab
Total Xylenes (m,p,o)	---	---	2/Month	Grab
Total BTEX	100 µg/l	100 µg/l	2/Month	Grab
Ethylene dibromide	---	0.05 µg/l	2/Month	Grab
Methyl-t-butyl Ether	---	70 µg/l	2/Month	Grab
Tert-Amyl Methyl Ether	---	---	2/Month	Grab
Carbon Tetrachloride	4.4 µg/l	4.4 µg/l	2/Month	Grab
1,4 Dichlorobenzene	5 µg/l	5 µg/l	2/Month	Grab
1,2 Dichlorobenzene	600 µg/l	600 µg/l	2/Month	Grab
1,3 Dichlorobenzene	320 µg/l	320 µg/l	2/Month	Grab
Total Dichlorobenzene	---	763 µg/l	2/Month	Grab
1,1 Dichloroethane	---	70 µg/l	2/Month	Grab
1,2 Dichloroethane	5 µg/l	5 µg/l	2/Month	Grab
1,1 Dichloroethylene	3.2 µg/l	3.2 µg/l	2/Month	Grab
Cis-1,2 Dichloroethylene	---	70 µg/l	2/Month	Grab
Dichloromethane	---	4.6 µg/l	2/Month	Grab
Tetrachloroethylene	5 µg/l	5 µg/l	2/Month	Grab
1,1,1 Trichloroethane	---	200 µg/l	2/Month	Grab
1,1,2 Trichloroethane	5 µg/l	5 µg/l	2/Month	Grab
Trichloroethylene	5 µg/l	5 µg/l	2/Month	Grab
Vinyl Chloride	1.92 µg/l	2 µg/l	2/Month	Grab

Acetone	---	7,970 µg/l	2/Month	Grab
1,4 Dioxane	---	200 µg/l	2/Month	Grab
Total Phenols	300 µg/l	300 µg/l	2/Month	Grab
Pentachlorophenol	1 µg/l ⁴	1 µg/l ⁴	2/Month	Grab
Total Phthalates	3 µg/l	190 µg/l	2/Month	Grab
Bis (2-Ethylhexyl) Phthalate	6 µg/l	6 µg/l	2/Month	Grab
Total Group I Polycyclic Aromatic Hydrocarbons	0.14 µg/l ⁴	1 µg/l	2/Month	Grab
Benzo (a) Anthracene	0.0038 µg/l ⁴	0.0038 µg/l ⁴	2/Month	Grab
Benzo (a) Pyrene	0.0038 µg/l ⁴	0.0038 µg/l ⁴	2/Month	Grab
Benzo (b) Fluoranthene	0.0038 µg/l ⁴	0.0038 µg/l ⁴	2/Month	Grab
Benzo (k) Fluoranthene	0.0038 µg/l ⁴	0.0038 µg/l ⁴	2/Month	Grab
Chrysene	0.0038 µg/l ⁴	0.0038 µg/l ⁴	2/Month	Grab
Dibenzo (a,h) anthracene	0.0038 µg/l ⁴	0.0038 µg/l ⁴	2/Month	Grab
Indeno (1,2,3-cd) Pyrene	0.0038 µg/l ⁴	0.0038 µg/l ⁴	2/Month	Grab
Total Group II Polycyclic Aromatic Hydrocarbons	0.14 µg/l ⁴	100 µg/l	2/Month	Grab
Acenaphthene	1.9 µg/l	1.9 µg/l	2/Month	Grab
Acenaphthylene	---	---	2/Month	Grab
Anthracene	32,000 µg/l	---	2/Month	Grab
Benzo (ghi) Perylene	---	---	2/Month	Grab
Fluoranthene	112 µg/l	---	2/Month	Grab
Fluorene	4,240 µg/l	---	2/Month	Grab
Naphthalene	---	20 µg/l	2/Month	Grab
Phenanthrene	---	---	2/Month	Grab
Pyrene	3,200 µg/l	---	2/Month	Grab
Total Polychlorinated Biphenyls (PCBs)	0.000064 µg/l ⁴	0.000064 µg/l ⁴	2/Month	Grab
Antimony (total recoverable)	5.6 µg/l	5.6 µg/l	2/Month	Grab
Arsenic (total recoverable)	1.12 µg/l	55.2 µg/l	2/Month	Grab
Cadmium (total recoverable)	7.08 µg/l	10.2 µg/l	2/Month	Grab
Chromium III (trivalent, total recoverable)	100 µg/l	323 µg/l	2/Month	Grab
Chromium VI (hexavalent, total recoverable)	40.28 µg/l	323 µg/l	2/Month	Grab
Copper (total recoverable)	2.98 µg/l	4.62 µg/l	2/Month	Grab
Lead (total recoverable)	6.81 µg/l	160 µg/l	2/Month	Grab
Mercury (total recoverable)	0.12 µg/l	1.69 µg/l	2/Month	Grab
Nickel (total recoverable)	6.62 µg/l	59.79 µg/l	2/Month	Grab
Selenium (total recoverable)	56.91 µg/l	232.46 µg/l	2/Month	Grab

Silver (total recoverable)	1.78 µg/l	1.78 µg/l	2/Month	Grab
Zinc (total recoverable)	68.5 µg/l	76.11 µg/l	2/Month	Grab
Iron (total recoverable)	---	1,000 µg/l	2/Month	Grab
PFAS Analytes ⁶	--- ng/l	--- ng/l	2/Month	Grab

22. Category H. Sites Engaged in Contaminated Aquifer Pump Testing, Contaminated Well Development or Rehabilitation Discharging to Class AA receiving waters. During the period beginning the date of authorization to discharge and lasting until either the expiration of this general permit or termination of coverage, permittee(s) are authorized to discharge from an approved groundwater treatment system. Such discharges shall be limited and monitored by the permittee as specified below:

Effluent Characteristic	Discharge Limitations Concentration - Specify Units		Monitoring Requirement	
	Average Monthly	Maximum Daily	Measurement Frequency ^{1,2}	Sample Type
Flow	--- GPM	xxx GPM	Continuous ³	Totalizer
Ammonia	---	---	2/Month	Grab
Ethanol ⁵	---	---	2/Month	Grab
Total Suspended Solids	---	30,000 µg/l	2/Month	Grab
Total Residual Chlorine	11 µg/l	19 µg/l	2/Month	Grab
Total Petroleum Hydrocarbons ⁷	---	1000 µg/l	2/Month	Grab
Cyanide	4.16 µg/l ⁴	17.6 µg/l	2/Month	Grab
Benzene	4.72 µg/l	5 µg/l	2/Month	Grab
Toluene	11.2 µg/l	508 µg/l	2/Month	Grab
Ethylbenzene	28.8 µg/l	1280 µg/l	2/Month	Grab
Total Xylenes (m,p,o)	2.4 µg/l	106.4 µg/l	2/Month	Grab
Total BTEX	---	100 µg/l	2/Month	Grab
Ethylene dibromide	---	0.05 µg/l	2/Month	Grab
Methyl-t-Butyl Ether	---	70 µg/l	2/Month	Grab
tert-Amyl Methyl Ether	---	---	2/Month	Grab
Carbon Tetrachloride	1.84 µg/l	4.4 µg/l	2/Month	Grab
1,4 Dichlorobenzene	0.96 µg/l	5 µg/l	2/Month	Grab
1,2 Dichlorobenzene	1.44 µg/l	63.2 µg/l	2/Month	Grab
1,3 Dichlorobenzene	6.96 µg/l	312 µg/l	2/Month	Grab
Total Dichlorobenzene	---	763 µg/l	2/Month	Grab
1,1 Dichloroethane	---	70 µg/l	2/Month	Grab
1,2 Dichloroethane	3.04 µg/l	5 µg/l	2/Month	Grab
1,1 Dichloroethylene	3.2 µg/l	3.2 µg/l	2/Month	Grab
cis 1,2 Dichloroethylene	---	70 µg/l	2/Month	Grab
Dichloromethane	---	4.6 µg/l	2/Month	Grab
Tetrachloroethylene	4.24 µg/l	5 µg/l	2/Month	Grab
1,1,1 Trichloroethane	---	200 µg/l	2/Month	Grab
1,1,2 Trichloroethane	4.72 µg/l	5 µg/l	2/Month	Grab
Trichloroethylene	5 µg/l	5 µg/l	2/Month	Grab
Vinyl Chloride	0.02 µg/l ⁴	2 µg/l	2/Month	Grab

Acetone	---	7970 µg/l	2/Month	Grab
1,4 Dioxane	---	200 µg/l	2/Month	Grab
Total Phenols	4.48 µg/l	200.8 µg/l	2/Month	Grab
Pentachlorophenol	0.04 µg/l ⁴	0.05 µg/l ⁴	2/Month	Grab
Total Phthalates	3 µg/l	190 µg/l	2/Month	Grab
Bis (2-Ethylhexyl) Phthalate	6 µg/l	6 µg/l	2/Month	Grab
Total Group I Polycyclic Aromatic Hydrocarbons	0.03 µg/l ⁴	1 µg/l	2/Month	Grab
Benzo (a) Anthracene	---	0.0038 µg/l ⁴	2/Month	Grab
Benzo (a) Pyrene	---	0.0038 µg/l ⁴	2/Month	Grab
Benzo (b) Fluoranthene	---	0.0038 µg/l ⁴	2/Month	Grab
Benzo (k) Fluoranthene	---	0.0038 µg/l ⁴	2/Month	Grab
Chrysene	---	0.0038 µg/l ⁴	2/Month	Grab
Dibenzo (a,h) anthracene	---	0.0038 µg/l ⁴	2/Month	Grab
Indeno (1,2,3-cd) Pyrene	---	0.0038 µg/l ⁴	2/Month	Grab
Total Group II Polycyclic Aromatic Hydrocarbons	0.03 µg/l ⁴	100 µg/l	2/Month	Grab
Acenaphthene	1.52 µg/l	1.9 µg/l	2/Month	Grab
Acenaphthylene	---	---	2/Month	Grab
Anthracene	6640 µg/l	---	2/Month	Grab
Benzo (ghi) Perylene	---	---	2/Month	Grab
Fluoranthene	3.52 µg/l	159.2 µg/l	2/Month	Grab
Fluorene	880 µg/l	---	2/Month	Grab
Naphthalene	2.08 µg/l	20 µg/l	2/Month	Grab
Phenanthrene	---	---	2/Month	Grab
Pyrene	664 µg/l	---	2/Month	Grab
Total Polychlorinated Biphenyls	0.000064 µg/l ⁴	0.000064 µg/l ⁴	2/Month	Grab
Antimony (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Arsenic (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Cadmium (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Chromium III (trivalent, total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Chromium VI (hexavalent, total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Copper (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Lead (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Mercury (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Nickel (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Selenium (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab

Silver (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Zinc (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Iron (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
PFAS Analytes ⁶	--- ng/l	--- ng/l	2/Month	Grab

23. Category H. Sites Engaged in Contaminated Aquifer Pump Testing, Contaminated Well Development or Rehabilitation Discharging to freshwater Non-Class AA receiving waters. During the period beginning the date of authorization to discharge and lasting until either the expiration of this general permit or termination of coverage, permittee(s) are authorized to discharge from an approved groundwater treatment system. Such discharges shall be limited and monitored by the permittee as specified below:

Effluent Characteristic	Discharge Limitations Concentration - Specify Units		Monitoring Requirement	
	Average Monthly	Maximum Daily	Measurement Frequency ^{1,2}	Sample Type
Flow	--- GPM	xxx GPM	Continuous ³	Totalizer
Ammonia	---	---	2/Month	Grab
Ethanol ⁵	---	---	2/Month	Grab
Total Suspended Solids	---	30,000 µg/l	2/Month	Grab
Total Residual Chlorine	11 µg/l	19 µg/l	2/Month	Grab
Total Petroleum Hydrocarbons ⁷	---	1,000 µg/l	2/Month	Grab
Cyanide	4.16 µg/l ⁴	17.6 µg/l	2/Month	Grab
Benzene	4.72 µg/l	5 µg/l	2/Month	Grab
Toluene	11.2 µg/l	508 µg/l	2/Month	Grab
Ethylbenzene	28.8 µg/l	1280 µg/l	2/Month	Grab
Total Xylenes (m,p,o)	2.4 µg/l	106.4 µg/l	2/Month	Grab
Total BTEX	---	100 µg/l	2/Month	Grab
Ethylene dibromide	---	0.05 µg/l	2/Month	Grab
Methyl-t-Butyl Ether	---	70 µg/l	2/Month	Grab
tert-Amyl Methyl Ether	---	---	2/Month	Grab
Carbon Tetrachloride	4.4 µg/l	4.4 µg/l	2/Month	Grab
1,4 Dichlorobenzene	0.96 µg/l	5 µg/l	2/Month	Grab
1,2 Dichlorobenzene	1.44 µg/l	63.2 µg/l	2/Month	Grab
1,3 Dichlorobenzene	6.96 µg/l	312 µg/l	2/Month	Grab
Total Dichlorobenzene	---	763 µg/l	2/Month	Grab
1,1 Dichloroethane	---	70 µg/l	2/Month	Grab
1,2 Dichloroethane	5 µg/l	5 µg/l	2/Month	Grab
1,1 Dichloroethylene	3.2 µg/l	3.2 µg/l	2/Month	Grab
cis-1,2 Dichloroethylene	---	70 µg/l	2/Month	Grab
Dichloromethane	---	4.6 µg/l	2/Month	Grab
Tetrachloroethylene	4.24 µg/l	5 µg/l	2/Month	Grab
1,1,1 Trichloroethane	---	200 µg/l	2/Month	Grab
1,1,2 Trichloroethane	5 µg/l	5 µg/l	2/Month	Grab
Trichloroethylene	5 µg/l	5 µg/l	2/Month	Grab
Vinyl Chloride	1.92 µg/l	2 µg/l	2/Month	Grab

Acetone	---	7,970 µg/l	2/Month	Grab
1,4 Dioxane	---	200 µg/l	2/Month	Grab
Total Phenols	4.48 µg/l	200.8 µg/l	2/Month	Grab
Pentachlorophenol	0.04 µg/l ⁴	0.05 µg/l ⁴	2/Month	Grab
Total Phthalates	3 µg/l	190 µg/l	2/Month	Grab
Bis (2-Ethylhexyl) Phthalate	6 µg/l	6 µg/l	2/Month	Grab
Total Group I Polycyclic Aromatic Hydrocarbons	0.14 µg/l ⁴	1 µg/l	2/Month	Grab
Benzo (a) Anthracene	---	0.0038 µg/l ⁴	2/Month	Grab
Benzo (a) Pyrene	---	0.0038 µg/l ⁴	2/Month	Grab
Benzo (b) Fluoranthene	---	0.0038 µg/l ⁴	2/Month	Grab
Benzo (k) Fluoranthene	---	0.0038 µg/l ⁴	2/Month	Grab
Chrysene	---	0.0038 µg/l ⁴	2/Month	Grab
Dibenzo (a,h) anthracene	---	0.0038 µg/l ⁴	2/Month	Grab
Indeno (1,2,3-cd) Pyrene	---	0.0038 µg/l ⁴	2/Month	Grab
Total Group II Polycyclic Aromatic Hydrocarbons	0.14 µg/l ⁴	100 µg/l	2/Month	Grab
Acenaphthene	1.52 µg/l	1.9 µg/l	2/Month	Grab
Acenaphthylene	---	---	2/Month	Grab
Anthracene	32,000 µg/l	---	2/Month	Grab
Benzo (ghi) Perylene	---	---	2/Month	Grab
Fluoranthene	3.52 µg/l	159.2 µg/l	2/Month	Grab
Fluorene	4,240 µg/l	---	2/Month	Grab
Naphthalene	2.08 µg/l	20 µg/l	2/Month	Grab
Phenanthrene	---	---	2/Month	Grab
Pyrene	3200 µg/l	---	2/Month	Grab
Total Polychlorinated Biphenyls (PCBs)	0.000064 µg/l ⁴	0.000064 µg/l ⁴	2/Month	Grab
Antimony (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Arsenic (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Cadmium (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Chromium III (trivalent, total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Chromium VI (hexavalent, total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Copper (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Lead (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Mercury (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Nickel (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Selenium (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab

Silver (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Zinc (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Iron (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
PFAS Analytes ⁶	--- ng/l	--- ng/l	2/Month	Grab

24. Category H. Sites Engaged in Contaminated Aquifer Pump Testing, Contaminated Well Development or Rehabilitation Discharging to saltwater receiving waters. During the period beginning the date of authorization to discharge and lasting until either the expiration of this general permit or termination of coverage, permittee(s) are authorized to discharge from an approved groundwater treatment system. Such discharges shall be limited and monitored by the permittee as specified below:

Effluent Characteristic	<u>Discharge Limitations</u> Concentration - Specify Units		Monitoring Requirement	
	<u>Average Monthly</u>	<u>Maximum Daily</u>	<u>Measurement Frequency</u> ^{1,2}	<u>Sample Type</u>
Flow	--- GPM	xxx GPM	Continuous ³	Totalizer
Ammonia	---	---	2/Month	Grab
Ethanol ⁵	---	---	2/Month	Grab
Total Suspended Solids	---	30,000 µg/l	2/Month	Grab
Total Residual Chlorine	7.5 µg/l ⁴	13 µg/l	2/Month	Grab
Total Petroleum Hydrocarbons ⁷	---	1000 µg/l	2/Month	Grab
Cyanide	0.8 µg/l ⁴	0.8 µg/l ⁴	2/Month	Grab
Benzene	5 µg/l	5 µg/l	2/Month	Grab
Toluene	12,000 µg/l	---	2/Month	Grab
Ethylbenzene	1,680 µg/l	---	2/Month	Grab
Total Xylenes (m,p,o)	---	---	2/Month	Grab
Total BTEX	100 µg/l	100 µg/l	2/Month	Grab
Ethylene dibromide	---	0.05 µg/l	2/Month	Grab
Methyl-t-Butyl Ether	---	70 µg/l	2/Month	Grab
tert-Amyl Methyl Ether	---	---	2/Month	Grab
Carbon Tetrachloride	4.4 µg/l	4.4 µg/l	2/Month	Grab
1,4 Dichlorobenzene	5 µg/l	5 µg/l	2/Month	Grab
1,2 Dichlorobenzene	600 µg/l	600 µg/l	2/Month	Grab
1,3 Dichlorobenzene	320 µg/l	320 µg/l	2/Month	Grab
Total Dichlorobenzene	---	763 µg/l	2/Month	Grab
1,1 Dichloroethane	---	70 µg/l	2/Month	Grab
1,2 Dichloroethane	5 µg/l	5 µg/l	2/Month	Grab
1,1 Dichloroethylene	3.2 µg/l	3.2 µg/l	2/Month	Grab
Cis-1,2 Dichloroethylene	---	70 µg/l	2/Month	Grab
Dichloromethane	---	4.6 µg/l	2/Month	Grab
Tetrachloroethylene	5 µg/l	5 µg/l	2/Month	Grab
1,1,1 Trichloroethane	---	200 µg/l	2/Month	Grab
1,1,2 Trichloroethane	5 µg/l	5 µg/l	2/Month	Grab
Trichloroethylene	5 µg/l	5 µg/l	2/Month	Grab
Vinyl Chloride	1.92 µg/l	2 µg/l	2/Month	Grab

Acetone	---	7,970 µg/l	2/Month	Grab
1,4 Dioxane	---	200 µg/l	2/Month	Grab
Total Phenols	300 µg/l	300 µg/l	2/Month	Grab
Pentachlorophenol	1 µg/l ⁴	1 µg/l ⁴	2/Month	Grab
Total Phthalates	3 µg/l	190 µg/l	2/Month	Grab
Bis (2-Ethylhexyl) Phthalate	6 µg/l	6 µg/l	2/Month	Grab
Total Group I Polycyclic Aromatic Hydrocarbons	0.14 µg/l ⁴	1 µg/l	2/Month	Grab
Benzo (a) Anthracene	0.0038 µg/l ⁴	0.0038 µg/l ⁴	2/Month	Grab
Benzo (a) Pyrene	0.0038 µg/l ⁴	0.0038 µg/l ⁴	2/Month	Grab
Benzo (b) Fluoranthene	0.0038 µg/l ⁴	0.0038 µg/l ⁴	2/Month	Grab
Benzo (k) Fluoranthene	0.0038 µg/l ⁴	0.0038 µg/l ⁴	2/Month	Grab
Chrysene	0.0038 µg/l ⁴	0.0038 µg/l ⁴	2/Month	Grab
Dibenzo (a,h) anthracene	0.0038 µg/l ⁴	0.0038 µg/l ⁴	2/Month	Grab
Indeno (1,2,3-cd) Pyrene	0.0038 µg/l ⁴	0.0038 µg/l ⁴	2/Month	Grab
Total Group II Polycyclic Aromatic Hydrocarbons	0.14 µg/l ⁴	100 µg/l	2/Month	Grab
Acenaphthene	1.9 µg/l	1.9 µg/l	2/Month	Grab
Acenaphthylene	---	---	2/Month	Grab
Anthracene	32,000 µg/l	---	2/Month	Grab
Benzo (ghi) Perylene	---	---	2/Month	Grab
Fluoranthene	112 µg/l	---	2/Month	Grab
Fluorene	4,240 µg/l	---	2/Month	Grab
Naphthalene	---	20 µg/l	2/Month	Grab
Phenanthrene	---	---	2/Month	Grab
Pyrene	3,200 µg/l	---	2/Month	Grab
Total Polychlorinated Biphenyls	0.000064 µg/l ⁴	0.000064 µg/l ⁴	2/Month	Grab
Antimony (total recoverable)	5.6 µg/l	5.6 µg/l	2/Month	Grab
Arsenic (total recoverable)	1.12 µg/l	55.2 µg/l	2/Month	Grab
Cadmium (total recoverable)	7.08 µg/l	10.2 µg/l	2/Month	Grab
Chromium III (trivalent, total recoverable)	100 µg/l	323 µg/l	2/Month	Grab
Chromium VI (hexavalent, total recoverable)	40.28 µg/l	323 µg/l	2/Month	Grab
Copper (total recoverable)	2.98 µg/l	4.62 µg/l	2/Month	Grab
Lead (total recoverable)	6.81 µg/l	160 µg/l	2/Month	Grab
Mercury (total recoverable)	0.12 µg/l	1.69 µg/l	2/Month	Grab
Nickel (total recoverable)	6.62 µg/l	59.79 µg/l	2/Month	Grab
Selenium (total recoverable)	56.91 µg/l	232.46 µg/l	2/Month	Grab

Silver (total recoverable)	1.78 µg/l	1.78 µg/l	2/Month	Grab
Zinc (total recoverable)	68.5 µg/l	76.11 µg/l	2/Month	Grab
Iron (total recoverable)	---	1,000 µg/l	2/Month	Grab
PFAS Analytes ⁶	--- ng/l	--- ng/l	2/Month	Grab

25. Category I. Hydrostatic Testing of Pipelines and Tanks Discharging to Class AA receiving waters. During the period beginning the date of authorization to discharge and lasting until either the expiration of this general permit or termination of coverage, permittee(s) are authorized to discharge from an approved groundwater treatment system. Such discharges shall be limited and monitored by the permittee as specified below:

Effluent Characteristic	Discharge Limitations Concentration - Specify Units		Monitoring Requirement	
	Average Monthly	Maximum Daily	Measurement Frequency ^{1,2}	Sample Type
Flow	--- GPM	xxx GPM	Continuous ³	Totalizer
Ethanol ⁵	---	---	2/Month	Grab
Total Suspended Solids	---	30000 µg/l	2/Month	Grab
Total Residual Chlorine	11 µg/l	19 µg/l	2/Month	Grab
Total Petroleum Hydrocarbons ⁷	---	1000 µg/l	2/Month	Grab
Benzene	4.72 µg/l	5 µg/l	2/Month	Grab
Total BTEX	---	100 µg/l	2/Month	Grab
Naphthalene	2.08 µg/l	20 µg/l	2/Month	Grab
Ethylene dibromide	---	0.05 µg/l	2/Month	Grab
Methyl-t-Butyl Ether	---	70 µg/l	2/Month	Grab
tert-Butyl Alcohol	---	---	2/Month	Grab
tert-Amyl Methyl Ether	---	---	2/Month	Grab
Bis (2-Ethylhexyl) Phthalate	6 µg/l	6 µg/l	2/Month	Grab
Total Group I Polycyclic Aromatic Hydrocarbons	0.03 µg/l ⁴	1 µg/l	2/Month	Grab
Benzo (a) Anthracene	---	0.0038 µg/l ⁴	2/Month	Grab
Benzo (a) Pyrene	---	0.0038 µg/l ⁴	2/Month	Grab
Benzo (b) Fluoranthene	---	0.0038 µg/l ⁴	2/Month	Grab
Benzo (k) Fluoranthene	---	0.0038 µg/l ⁴	2/Month	Grab
Chrysene	---	0.0038 µg/l ⁴	2/Month	Grab
Dibenzo (a,h) anthracene	---	0.0038 µg/l ⁴	2/Month	Grab
Indeno (1,2,3-cd) Pyrene	---	0.0038 µg/l ⁴	2/Month	Grab
Copper (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Lead (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Nickel (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Chromium III (trivalent, total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Chromium VI (hexavalent, total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Zinc (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Iron (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
PFAS Analytes ⁶	--- ng/l	--- ng/l	2/Month	Grab

26. Category I. Hydrostatic Testing of Pipelines and Tanks Discharging to freshwater Non-Class AA receiving waters. During the period beginning the date of authorization to discharge and lasting until either the expiration of this general permit or termination of coverage, permittee(s) are authorized to discharge from an approved groundwater treatment system. Such discharges shall be limited and monitored by the permittee as specified below:

Effluent Characteristic	Discharge Limitations Concentration - Specify Units		Monitoring Requirement	
	Average Monthly	Maximum Daily	Measurement Frequency ^{1,2}	Sample Type
Flow	--- GPM	xxx GPM	Continuous ³	Totalizer
Ethanol ⁵	---	---	2/Month	Grab
Total Suspended Solids	---	30,000 µg/l	2/Month	Grab
Total Residual Chlorine	11 µg/l	19 µg/l	2/Month	Grab
Total Petroleum Hydrocarbons ⁷	---	1,000 µg/l	2/Month	Grab
Benzene	4.72 µg/l	5 µg/l	2/Month	Grab
Total BTEX	---	100 µg/l	2/Month	Grab
Naphthalene	2.08 µg/l	20 µg/l	2/Month	Grab
Ethylene dibromide	---	0.05 µg/l	2/Month	Grab
Methyl-t-Butyl Ether	---	70 µg/l	2/Month	Grab
tert-Butyl Alcohol	---	---	2/Month	Grab
tert-Amyl Methyl Ether	---	---	2/Month	Grab
Bis (2-Ethylhexyl) Phthalate	6 µg/l	6 µg/l	2/Month	Grab
Total Group I Polycyclic Aromatic Hydrocarbons	0.14 µg/l ⁴	1 µg/l	2/Month	Grab
Benzo(a) Anthracene	---	0.0038 µg/l ⁴	2/Month	Grab
Benzo (a) Pyrene	---	0.0038 µg/l ⁴	2/Month	Grab
Benzo (b) Fluoranthene	---	0.0038 µg/l ⁴	2/Month	Grab
Benzo (k) Fluoranthene	---	0.0038 µg/l ⁴	2/Month	Grab
Chrysene	---	0.0038 µg/l ⁴	2/Month	Grab
Dibenzo (a,h) anthracene	---	0.0038 µg/l ⁴	2/Month	Grab
Indeno (1,2,3-cd) Pyrene	---	0.0038 µg/l ⁴	2/Month	Grab
Copper (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Lead (total Recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Nickel (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Chromium III (trivalent, total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Chromium VI (hexavalent, total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Zinc (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Iron (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
PFAS Analytes ⁶	--- ng/l	--- ng/l	2/Month	Grab

27. Category I. Hydrostatic Testing of Pipelines and Tanks Discharging to saltwater receiving waters. During the period beginning the date of authorization to discharge and lasting until either the expiration of this general permit or termination of coverage, permittee(s) are authorized to discharge from an approved groundwater treatment system. Such discharges shall be limited and monitored by the permittee as specified below:

Effluent Characteristic	Discharge Limitations Concentration - Specify Units		Monitoring Requirement	
	Average <u>Monthly</u>	Maximum <u>Daily</u>	Measurement <u>Frequency</u> ^{1,2}	Sample <u>Type</u>
Flow	--- GPM	xxx GPM	Continuous ³	Totalizer
Ethanol ⁵	---	---	2/Month	Grab
Total Suspended Solids	---	30,000 µg/l	2/Month	Grab
Total Residual Chlorine	7.5 µg/l ⁴	13 µg/l	2/Month	Grab
Total Petroleum Hydrocarbons ⁷	---	1,000 µg/l	2/Month	Grab
Benzene	5 µg/l	5 µg/l	2/Month	Grab
Total BTEX	100 µg/l	100 µg/l	2/Month	Grab
Naphthalene	---	20 µg/l	2/Month	Grab
Ethylene dibromide	---	0.05 µg/l	2/Month	Grab
Methyl-t-Butyl Ether	---	70 µg/l	2/Month	Grab
tert-Butyl Alcohol	---	---	2/Month	Grab
tert-Amyl Methyl Ether	---	---	2/Month	Grab
Bis (2-Ethylhexyl) Phthalate	6 µg/l	6 µg/l	2/Month	Grab
Total Group I Polycyclic Aromatic Hydrocarbons	0.14 µg/l ⁴	1 µg/l	2/Month	Grab
Benzo (a) Anthracene	0.0038 µg/l ⁴	0.0038 µg/l ⁴	2/Month	Grab
Benzo (a) Pyrene	0.0038 µg/l ⁴	0.0038 µg/l ⁴	2/Month	Grab
Benzo (b) Fluoranthene	0.0038 µg/l ⁴	0.0038 µg/l ⁴	2/Month	Grab
Benzo (k) Fluoranthene	0.0038 µg/l ⁴	0.0038 µg/l ⁴	2/Month	Grab
Chrysene	0.0038 µg/l ⁴	0.0038 µg/l ⁴	2/Month	Grab
Dibenzo (a,h) anthracene	0.0038 µg/l ⁴	0.0038 µg/l ⁴	2/Month	Grab
Indeno (1,2,3-cd) Pyrene	0.0038 µg/l ⁴	0.0038 µg/l ⁴	2/Month	Grab
Copper (total recoverable)	2.98 µg/l	4.62 µg/l	2/Month	Grab
Lead (total recoverable)	6.81 µg/l	160 µg/l	2/Month	Grab
Nickel (total recoverable)	6.62 µg/l	59.79 µg/l	2/Month	Grab
Chromium III (trivalent, total recoverable)	100 µg/l	323 µg/l	2/Month	Grab
Chromium VI (hexavalent, total recoverable)	40.28 µg/l	323 µg/l	2/Month	Grab
Zinc (total recoverable)	68.5 µg/l	76.11 µg/l	2/Month	Grab
Iron (total recoverable)	---	1,000 µg/l	2/Month	Grab
PFAS Analytes ⁶	--- ng/l	--- ng/l	2/Month	Grab

28. Category J. Contaminated Sumps Discharging to Class AA receiving waters. During the period beginning the date of authorization to discharge and lasting until either the expiration of this general permit or termination of coverage, permittee(s) are authorized to discharge from an approved groundwater treatment system. Such discharges shall be limited and monitored by the permittee as specified below:

Effluent Characteristic	<u>Discharge Limitations</u>		Monitoring Requirement	
	Concentration - Specify Units		Measurement Frequency ^{1,2}	Sample Type
	<u>Average Monthly</u>	<u>Maximum Daily</u>		
Flow	--- GPM	xxx GPM	Continuous ³	Totalizer
Ammonia	---	---	2/Month	Grab
Ethanol ⁵	---	---	2/Month	Grab
Total Suspended Solids	---	30000 µg/l	2/Month	Grab
Total Residual Chlorine	11 µg/l	19 µg/l	2/Month	Grab
Total Petroleum Hydrocarbons ⁷	---	1000 µg/l	2/Month	Grab
Cyanide	4.16 µg/l ⁴	17.6 µg/l	2/Month	Grab
Benzene	4.72 µg/l	5 µg/l	2/Month	Grab
Toluene	11.2 µg/l	508 µg/l	2/Month	Grab
Ethylbenzene	28.8 µg/l	1280 µg/l	2/Month	Grab
Total Xylenes (m,p,o)	2.4 µg/l	106.4 µg/l	2/Month	Grab
Total BTEX	---	100 µg/l	2/Month	Grab
Ethylene dibromide	---	0.05 µg/l	2/Month	Grab
Methyl-t-Butyl Ether	---	70 µg/l	2/Month	Grab
tert-Amyl Methyl Ether	---	---	2/Month	Grab
Carbon Tetrachloride	1.84 µg/l	4.4 µg/l	2/Month	Grab
1,4 Dichlorobenzene	0.96 µg/l	5 µg/l	2/Month	Grab
1,2 Dichlorobenzene	1.44 µg/l	63.2 µg/l	2/Month	Grab
1,3 Dichlorobenzene	6.96 µg/l	312 µg/l	2/Month	Grab
Total Dichlorobenzene	---	763 µg/l	2/Month	Grab
1,1 Dichloroethane	---	70 µg/l	2/Month	Grab
1,2 Dichloroethane	3.04 µg/l	5 µg/l	2/Month	Grab
1,1 Dichloroethylene	3.2 µg/l	3.2 µg/l	2/Month	Grab
Cis-1,2 Dichloroethylene	---	70 µg/l	2/Month	Grab
Dichloromethane	---	4.6 µg/l	2/Month	Grab
Tetrachloroethylene	4.24 µg/l	5 µg/l	2/Month	Grab
1,1,1 Trichloroethane	---	200 µg/l	2/Month	Grab
1,1,2 Trichloroethane	4.72 µg/l	5 µg/l	2/Month	Grab
Trichloroethylene	5 µg/l	5 µg/l	2/Month	Grab
Vinyl Chloride	0.02 µg/l ⁴	2 µg/l	2/Month	Grab
Acetone	---	7970 µg/l	2/Month	Grab

1,4 Dioxane	---	200 µg/l	2/Month	Grab
Total Phenols	4.48 µg/l	200.8 µg/l	2/Month	Grab
Pentachlorophenol	0.04 µg/l ⁴	0.05 µg/l ⁴	2/Month	Grab
Total Phthalates	3 µg/l	190 µg/l	2/Month	Grab
Bis (2-Ethylhexyl) Phthalate	6 µg/l	6 µg/l	2/Month	Grab
Total Group I Polycyclic Aromatic Hydrocarbons	0.03 µg/l ⁴	1 µg/l	2/Month	Grab
Benzo (a) Anthracene	---	0.0038 µg/l ⁴	2/Month	Grab
Benzo (a) Pyrene	---	0.0038 µg/l ⁴	2/Month	Grab
Benzo (b) Fluoranthene	---	0.0038 µg/l ⁴	2/Month	Grab
Benzo (k) Fluoranthene	---	0.0038 µg/l ⁴	2/Month	Grab
Chrysene	---	0.0038 µg/l ⁴	2/Month	Grab
Dibenzo (a,h) anthracene	---	0.0038 µg/l ⁴	2/Month	Grab
Indeno (1,2,3-cd) Pyrene	---	0.0038 µg/l ⁴	2/Month	Grab
Total Group II Polycyclic Aromatic Hydrocarbons	0.03 µg/l ⁴	100 µg/l	2/Month	Grab
Acenaphthene	1.52 µg/l	1.9 µg/l	2/Month	Grab
Acenaphthylene	---	---	2/Month	Grab
Anthracene	6640 µg/l	---	2/Month	Grab
Benzo (ghi) Perylene	---	---	2/Month	Grab
Fluoranthene	3.52 µg/l	159.2 µg/l	2/Month	Grab
Fluorene	880 µg/l	---	2/Month	Grab
Naphthalene	2.08 µg/l	20 µg/l	2/Month	Grab
Phenanthrene	---	---	2/Month	Grab
Pyrene	664 µg/l	---	2/Month	Grab
Total Polychlorinated Biphenyls (PCBs)	0.000064 µg/l ⁴	0.000064 µg/l ⁴	2/Month	Grab
Antimony (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Arsenic (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Cadmium (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Chromium III (trivalent, total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Chromium VI (hexavalent, total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Copper (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Lead (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Mercury (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Nickel (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Selenium (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Silver (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab

Zinc (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Iron (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
PFAS Analytes ⁶	--- ng/l	--- ng/l	2/Month	Grab

29. Category J. Contaminated Sumps Discharging to freshwater Non-Class AA receiving waters. During the period beginning the date of authorization to discharge and lasting until either the expiration of this general permit or termination of coverage, permittee(s) are authorized to discharge from an approved groundwater treatment system. Such discharges shall be limited and monitored by the permittee as specified below:

Effluent Characteristic	Discharge Limitations Concentration - Specify Units		Monitoring Requirement	
	Average <u>Monthly</u>	Maximum <u>Daily</u>	Measurement <u>Frequency</u> ^{1,2}	Sample <u>Type</u>
Flow	--- GPM	xxx GPM	Continuous ³	Totalizer
Ammonia	---	---	2/Month	Grab
Ethanol ⁵	---	---	2/Month	Grab
Total Suspended Solids	---	30,000 µg/l	2/Month	Grab
Total Residual Chlorine	11 µg/l	19 µg/l	2/Month	Grab
Total Petroleum Hydrocarbons ⁷	---	1,000 µg/l	2/Month	Grab
Cyanide	4.16 µg/l ⁴	17.6 µg/l	2/Month	Grab
Benzene	4.72 µg/l	5 µg/l	2/Month	Grab
Toluene	11.2 µg/l	508 µg/l	2/Month	Grab
Ethylbenzene	28.8 µg/l	1,280 µg/l	2/Month	Grab
Total Xylenes (m,p,o)	2.4 µg/l	106.4 µg/l	2/Month	Grab
Total BTEX	---	100 µg/l	2/Month	Grab
Ethylene dibromide	---	0.05 µg/l	2/Month	Grab
Methyl-t-Butyl Ether	---	70 µg/l	2/Month	Grab
tert-Amyl Methyl Ether	---	---	2/Month	Grab
Carbon Tetrachloride	4.4 µg/l	4.4 µg/l	2/Month	Grab
1,4 Dichlorobenzene	0.96 µg/l	5 µg/l	2/Month	Grab
1,2 Dichlorobenzene	1.44 µg/l	63.2 µg/l	2/Month	Grab
1,3 Dichlorobenzene	6.96 µg/l	312 µg/l	2/Month	Grab
Total Dichlorobenzene	---	763 µg/l	2/Month	Grab
1,1 Dichloroethane	---	70 µg/l	2/Month	Grab
1,2 Dichloroethane	5 µg/l	5 µg/l	2/Month	Grab
1,1 Dichloroethylene	3.2 µg/l	3.2 µg/l	2/Month	Grab
cis-1,2 Dichloroethylene	---	70 µg/l	2/Month	Grab
Dichloromethane	---	4.6 µg/l	2/Month	Grab
Tetrachloroethylene	4.24 µg/l	5 µg/l	2/Month	Grab
1,1,1 Trichloroethane	---	200 µg/l	2/Month	Grab
1,1,2 Trichloroethane	5 µg/l	5 µg/l	2/Month	Grab
Trichloroethylene	5 µg/l	5 µg/l	2/Month	Grab
Vinyl Chloride	1.92 µg/l	2 µg/l	2/Month	Grab

Acetone	---	7,970 µg/l	2/Month	Grab
1,4 Dioxane	---	200 µg/l	2/Month	Grab
Total Phenols	4.48 µg/l	200.8 µg/l	2/Month	Grab
Pentachlorophenol	0.04 µg/l ⁴	0.05 µg/l ⁴	2/Month	Grab
Total Phthalates	3 µg/l	190 µg/l	2/Month	Grab
Bis (2-Ethylhexyl) Phthalate	6 µg/l	6 µg/l	2/Month	Grab
Total Group I Polycyclic Aromatic Hydrocarbons	0.14 µg/l ⁴	1 µg/l	2/Month	Grab
Benzo (a) anthracene	---	0.0038 µg/l ⁴	2/Month	Grab
Benzo (a) Pyrene	---	0.0038 µg/l ⁴	2/Month	Grab
Benzo (b) Fluoranthene	---	0.0038 µg/l ⁴	2/Month	Grab
Benzo (k) Fluoranthene	---	0.0038 µg/l ⁴	2/Month	Grab
Chrysene	---	0.0038 µg/l ⁴	2/Month	Grab
Dibenzo (a,h) anthracene	---	0.0038 µg/l ⁴	2/Month	Grab
Indeno (1,2,3-cd) Pyrene	---	0.0038 µg/l ⁴	2/Month	Grab
Total Group II Polycyclic Aromatic Hydrocarbons	0.14 µg/l ⁴	100 µg/l	2/Month	Grab
Acenaphthene	1.52 µg/l	1.9 µg/l	2/Month	Grab
Acenaphthylene	---	---	2/Month	Grab
Anthracene	32,000 µg/l	---	2/Month	Grab
Benzo (ghi) Perylene	---	---	2/Month	Grab
Fluoranthene	3.52 µg/l	159.2 µg/l	2/Month	Grab
Fluorene	4,240 µg/l	---	2/Month	Grab
Naphthalene	2.08 µg/l	20 µg/l	2/Month	Grab
Phenanthrene	---	---	2/Month	Grab
Pyrene	3,200 µg/l	---	2/Month	Grab
Total Polychlorinated Biphenyls (PCBs)	0.000064 µg/l ⁴	0.000064 µg/l ⁴	2/Month	Grab
Antimony (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Arsenic (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Cadmium (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Chromium III (trivalent, total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Chromium VI (hexavalent, total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Copper (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Lead (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Mercury (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Nickel (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Selenium (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab

Silver (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Zinc (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
Iron (total recoverable)	See Part II.E	See Part II.E	2/Month	Grab
PFAS Analytes ⁶	--- ng/l	--- ng/l	2/Month	Grab

30. Category J. Contaminated Sumps Discharging to saltwater receiving waters. During the period beginning the date of authorization to discharge and lasting until either the expiration of this general permit or termination of coverage, permittee(s) are authorized to discharge from an approved groundwater treatment system. Such discharges shall be limited and monitored by the permittee as specified below:

Effluent Characteristic	Discharge Limitations Concentration - Specify Units		Monitoring Requirement	
	Average Monthly	Maximum Daily	Measurement Frequency ^{1,2}	Sample Type
Flow	--- GPM	xxx GPM	Continuous ³	Totalizer
Ammonia	---	---	2/Month	Grab
Ethanol ⁵	---	---	2/Month	Grab
Total Suspended Solids	---	30,000 µg/l	2/Month	Grab
Total Residual Chlorine	7.5 µg/l ⁴	13 µg/l	2/Month	Grab
Total Petroleum Hydrocarbons ⁷	---	1,000 µg/l	2/Month	Grab
Cyanide	0.8 µg/l ⁴	0.8 µg/l ⁴	2/Month	Grab
Benzene	5 µg/l	5 µg/l	2/Month	Grab
Toluene	12,000 µg/l	---	2/Month	Grab
Ethylbenzene	1680 µg/l	---	2/Month	Grab
Total Xylenes (m,p,o)	---	---	2/Month	Grab
Total BTEX	100 µg/l	100 µg/l	2/Month	Grab
Ethylene dibromide	---	0.05 µg/l	2/Month	Grab
Methyl-t-Butyl Ether	---	70 µg/l	2/Month	Grab
tert-Amyl Methyl Ether	---	---	2/Month	Grab
Carbon Tetrachloride	4.4 µg/l	4.4 µg/l	2/Month	Grab
1,4 Dichlorobenzene	5 µg/l	5 µg/l	2/Month	Grab
1,2 Dichlorobenzene	600 µg/l	600 µg/l	2/Month	Grab
1,3 Dichlorobenzene	320 µg/l	320 µg/l	2/Month	Grab
Total Dichlorobenzene	---	763 µg/l	2/Month	Grab
1,1 Dichloroethane	---	70 µg/l	2/Month	Grab
1,2 Dichloroethane	5 µg/l	5 µg/l	2/Month	Grab
1,1 Dichloroethylene	3.2 µg/l	3.2 µg/l	2/Month	Grab
Cis-1,2 Dichloroethylene	---	70 µg/l	2/Month	Grab
Dichloromethane	---	4.6 µg/l	2/Month	Grab
Tetrachloroethylene	5 µg/l	5 µg/l	2/Month	Grab
1,1,1 Trichloroethane	---	200 µg/l	2/Month	Grab
1,1,2 Trichloroethane	5 µg/l	5 µg/l	2/Month	Grab
Trichloroethylene	5 µg/l	5 µg/l	2/Month	Grab
Vinyl Chloride	1.92 µg/l	2 µg/l	2/Month	Grab

Acetone	---	7,970 µg/l	2/Month	Grab
1,4 Dioxane	---	200 µg/l	2/Month	Grab
Total Phenols	300 µg/l	300 µg/l	2/Month	Grab
Pentachlorophenol	1 µg/l ⁴	1 µg/l ⁴	2/Month	Grab
Total Phthalates	3 µg/l	190 µg/l	2/Month	Grab
Bis (2-Ethylhexyl) Phthalate	6 µg/l	6 µg/l	2/Month	Grab
Total Group I Polycyclic Aromatic Hydrocarbons	0.14 µg/l ⁴	1 µg/l	2/Month	Grab
Benzo (a) Anthracene	0.0038 µg/l ⁴	0.0038 µg/l ⁴	2/Month	Grab
Benzo (a) Pyrene	0.0038 µg/l ⁴	0.0038 µg/l ⁴	2/Month	Grab
Benzo (b) Fluoranthene	0.0038 µg/l ⁴	0.0038 µg/l ⁴	2/Month	Grab
Benzo (k) Fluoranthene	0.0038 µg/l ⁴	0.0038 µg/l ⁴	2/Month	Grab
Chrysene	0.0038 µg/l ⁴	0.0038 µg/l ⁴	2/Month	Grab
Dibenzo (a,h) anthracene	0.0038 µg/l ⁴	0.0038 µg/l ⁴	2/Month	Grab
Indeno (1,2,3-cd) Pyrene	0.0038 µg/l ⁴	0.0038 µg/l ⁴	2/Month	Grab
Total Group II Polycyclic Aromatic Hydrocarbons	0.14 µg/l ⁴	100 µg/l	2/Month	Grab
Acenaphthene	1.9 µg/l	1.9 µg/l	2/Month	Grab
Acenaphthylene	---	---	2/Month	Grab
Anthracene	32,000 µg/l	---	2/Month	Grab
Benzo (ghi) Perylene	---	---	2/Month	Grab
Fluoranthene	112 µg/l	---	2/Month	Grab
Fluorene	4,240 µg/l	---	2/Month	Grab
Naphthalene	---	20 µg/l	2/Month	Grab
Phenanthrene	---	---	2/Month	Grab
Pyrene	3,200 µg/l	---	2/Month	Grab
Total Polychlorinated Biphenyls (PCBs)	0.000064 µg/l ⁴	0.000064 µg/l ⁴	2/Month	Grab
Antimony (total recoverable)	5.6 µg/l	5.6 µg/l	2/Month	Grab
Arsenic (total recoverable)	1.12 µg/l	55.2 µg/l	2/Month	Grab
Cadmium (total recoverable)	7.08 µg/l	10.2 µg/l	2/Month	Grab
Chromium III (trivalent, total recoverable)	100 µg/l	323 µg/l	2/Month	Grab
Chromium VI (hexavalent, total recoverable)	40.28 µg/l	323 µg/l	2/Month	Grab
Copper (total recoverable)	2.98 µg/l	4.62 µg/l	2/Month	Grab
Lead (total recoverable)	6.81 µg/l	160 µg/l	2/Month	Grab
Mercury (total recoverable)	0.12 µg/l	1.69 µg/l	2/Month	Grab
Nickel (total recoverable)	6.62 µg/l	59.79 µg/l	2/Month	Grab
Selenium (total recoverable)	56.91 µg/l	232.46 µg/l	2/Month	Grab

Silver (total recoverable)	1.78 µg/l	1.78 µg/l	2/Month	Grab
Zinc (total recoverable)	68.5 µg/l	76.11 µg/l	2/Month	Grab
Iron (total recoverable)	---	1000 µg/l	2/Month	Grab
PFAS Analytes ⁶	--- ng/l	--- ng/l	2/Month	Grab

Description of footnotes and symbols applicable to all monitoring classes:

¹In accordance with Part I.B.2, the DEM reserves the right to increase monitoring frequency based on factors including, but not limited to, quality of influent data and duration of project.

²In accordance with Part II.B.2 during the first month of discharge additional sampling requirements are applicable.

³Monitor flow and submit a flow log with the monitoring results. The flow log shall include the rate and duration of flow including the time(s) of day when flow commences and ceases. At a minimum, the flow must be reported each time a sample is collected.

⁴The limit at which compliance/noncompliance determinations will be based is the Quantitation Limit (QL), which is listed for each pollutant in Part II.G of this permit. Measurements at or below the QL from Part II.G shall be deemed to be compliant. Measurements above the QL from Part II.G shall be deemed noncompliant. The QLs may be reduced by permit modification as more sensitive methods are approved by EPA and the State.

⁵Ethanol shall be analyzed using EPA method 1671.

⁶PFAS shall be analyzed using Clean Water Act wastewater analytical method 1633 until a 40 CFR Part 136 approved test method for wastewater approved.

⁷Total Petroleum Hydrocarbons shall be analyzed using EPA SW-846 test method 8100M.

---Signifies a parameter which must be monitored, and data must be reported; no limit has been established at this time.

xxx Signifies a parameter which will be limited based upon the design plans and specifications for each project.

Samples taken in compliance with the monitoring requirements specified above shall be taken at the effluent of a treatment system in accordance with Part II.B. The two (2) grab samples taken per month shall be separated by a minimum of ten (10) days.

E. Metals Effluent Limitations (µg/l)

Dilution Range: <5				
Water Body Classification Limit Type	Class AA Freshwater Monthly Average	Class AA Freshwater Daily Maximum	Non-Class AA Freshwater Monthly Average	Non-Class AA Freshwater Daily Maximum
Antimony	4.48	206	8	206
Arsenic	0.14 ¹	104	1.12	104
Cadmium	0.08 ¹	0.42	0.08 ¹	0.42
Chromium III	22.15	323	22.15	323
Chromium VI	9.15	13.03	9.15	13.03
Copper	2.28	3.03	2.28	3.03
Lead	0.44	11.18	0.44	11.18
Mercury	0.13	0.739	0.14	0.739
Nickel	12.92	116.17	12.92	116.17
Selenium	4	16	4	16
Silver	---	0.3	---	0.3
Zinc	29.61	29.61	29.61	29.61
Iron	240	5000	800	5000
Dilution Range: 5 to 10				
Water Body Classification Limit Type	Class AA Freshwater Monthly Average	Class AA Freshwater Daily Maximum	Non-Class AA Freshwater Monthly Average	Non-Class AA Freshwater Daily Maximum
Antimony	22.4	206	40	206
Arsenic	0.7 ¹	104	5.6	104
Cadmium	0.4	2.1	0.4	2.1
Chromium III	110.75	323	110.75	323
Chromium VI	45.75	65.15	45.75	65.15
Copper	11.4	15.15	11.4	15.15
Lead	2.2	55.9	2.2	55.9
Mercury	0.65	0.739	0.7	0.739
Nickel	64.6	580.85	64.6	580.85
Selenium	20	80	20	80
Silver	---	1.5	---	1.5
Zinc	148.05	148.05	148.05	148.05
Iron	1200	5000	4000	5000
Dilution Range: 10 to 20				
Water Body Classification Limit Type	Class AA Freshwater Monthly Average	Class AA Freshwater Daily Maximum	Non-Class AA Freshwater Monthly Average	Non-Class AA Freshwater Daily Maximum
Antimony	44.8	206	80	206
Arsenic	1.4	104	11.2	104
Cadmium	0.8	4.2	0.8	4.2
Chromium III	221.5	323	221.5	323
Chromium VI	91.5	130.3	91.5	130.3
Copper	22.8	30.3	22.8	30.3
Lead	4.4	111.8	4.4	111.8
Mercury	0.739	0.739	0.739	0.739
Nickel	129.2	1161.7	129.2	1161.7
Selenium	40	160	40	160
Silver	---	3	---	3
Zinc	296.1	296.1	296.1	296.1
Iron	2400	5000	5000	5000

Dilution Range: 20 to 40				
Water Body Classification Limit Type	Class AA Freshwater Monthly Average	Class AA Freshwater Daily Maximum	Non-Class AA Freshwater Monthly Average	Non-Class AA Freshwater Daily Maximum
Antimony	89.6	206	160	206
Arsenic	2.8	104	22.4	104
Cadmium	1.6	8.4	1.6	8.4
Chromium III	323	323	323	323
Chromium VI	183	260.6	183	260.6
Copper	45.6	60.6	45.6	60.6
Lead	8.8	160	8.8	160
Mercury	0.739	0.739	0.739	0.739
Nickel	258.4	1450	258.4	1450
Selenium	80	235.8	80	235.8
Silver	---	6	---	6
Zinc	420	420	420	420
Iron	4800	5000	5000	5000

Dilution Range: 40 to 60				
Water Body Classification Limit Type	Class AA Freshwater Monthly Average	Class AA Freshwater Daily Maximum	Non-Class AA Freshwater Monthly Average	Non-Class AA Freshwater Daily Maximum
Antimony	179.2	206	206	206
Arsenic	5.6	104	44.8	104
Cadmium	3.2	10.2	3.2	10.2
Chromium III	323	323	323	323
Chromium VI	323	323	323	323
Copper	91.2	121.2	91.2	121.2
Lead	17.6	160	17.6	160
Mercury	0.739	0.739	0.739	0.739
Nickel	516.8	1450	516.8	1450
Selenium	160	235.8	160	235.8
Silver	---	12	---	12
Zinc	420	420	420	420
Iron	5000	5000	5000	5000

Dilution Range: ≥ 60				
Water Body Classification Limit Type	Class AA Freshwater Monthly Average	Class AA Freshwater Daily Maximum	Non-Class AA Freshwater Monthly Average	Non-Class AA Freshwater Daily Maximum
Antimony	206	206	206	206
Arsenic	8.4	104	67.2	104
Cadmium	4.8	10.2	4.8	10.2
Chromium III	323	323	323	323
Chromium VI	323	323	323	323
Copper	136.8	181.8	136.8	181.8
Lead	26.4	160	26.4	160
Mercury	0.739	0.739	0.739	0.739
Nickel	775.2	1450	775.2	1450
Selenium	235.8	235.8	235.8	235.8
Silver	---	18	---	18
Zinc	420	420	420	420
Iron	5000	5000	5000	5000

¹ The limit at which compliance/noncompliance determinations will be based is the Quantitation Limit (QL), which is listed for each pollutant in Part II.G of this permit. Measurements at or below the QL from Part II.G shall be deemed to be compliant. Measurements above the QL from Part II.G shall be deemed noncompliant. The QLs may be reduced by permit modification as more sensitive methods are approved by EPA and the State.

F. NOTICE OF INTENT REQUIREMENTS

1. OWNER - Provide the legal name of the person, firm, public, municipal organization, or any other entity that owns the site described in the application. The name of the owner may or may not be the same as the name of the site. Provide the complete mailing address, telephone number and email address of the owner/contact person and title.
2. OPERATOR - Provide the legal name of the person, firm, public, municipal organization or any other entity that has day-to-day operations of the site described in this application. The complete mailing address of the operator along with the name, telephone number, and email address of the designated contact person is required as part of the application.
3. SITE INFORMATION
 - a. The applicant must provide a brief history of the site, the source of contamination, a description of the proposed remedial and/or dewatering activity creating the discharge, all available analytical data on impacted groundwater, a site plan showing location of monitoring and recovery wells, discharge point and receiving water, and a topographic map depicting the site location extending at least one (1) mile beyond the property boundaries of the facility that clearly shows the legal boundaries of the facility and the location of each intake and outfall structure.
 - b. The applicant must provide the facility/site name, longitude and latitude, and the four-digit Standard Industrial Classification (SIC) code that best represents the principal products or activities associated with the facility. The facility/site location (address, city, state, and zip) must also be provided. Each applicant must also state the type of spill or release pertaining to this NOI and the approximate duration of the project.
 - c. For the site in which the application is being submitted, indicate if a prior RIPDES permit has been granted for the discharge. The application must include the prior RIPDES permit number if applicable.
 - d. For the site in which the application is being submitted indicate whether a prior RIPDES application has ever been filed for the discharge. If yes, please provide the date of the application filed and application number, if available.
 - e. For the site which the application is being submitted indicate whether the site/facility is currently covered by any other RIPDES permit including but not limited to: the RIPDES Multi-Sector Storm Water General Permit, the RIPDES Construction Storm Water General Permit, or an Individual RIPDES Permit, if so, this information along with any applicable permit numbers must be provided with the application.
 - f. For the site in which the application is being submitted indicate whether the site/facility is subject to any other DEM permitting or any other action required by DEM, which is causing the generation of the discharge. If applicable, the applicant must provide the applicable permit number and the associated DEM contact name with the application.
 - g. The applicant must provide a description of the discharge activities for which the owner/applicant is seeking coverage.
 - h. The applicant must provide the following information about each discharge: the number of discharge points and the maximum and average flow rate of the discharge in cubic feet per second.
 - i. For the location of each outfall, the permittee must provide the latitude and longitude of the approximate center of the outfall to the nearest 15 seconds, for which the NOI is being submitted.
 - j. If the applicant intends to discharge hydrostatic test waters, the total volume of the discharge must be provided in gallons.

- k. The applicant must indicate whether the discharge is intermittent or seasonal.
- l. The applicant must provide the expected start and end dates of the discharge.
- m. Based on the analysis of the sample(s) collected of the untreated influent, the applicant must indicate which sub-category the potential discharge falls within as specified in Table 1 located in Part I.A.2 of the permit.

4. TREATMENT SYSTEM INFORMATION

- a. The applicant must provide a complete description of the treatment system including a flow schematic depicting all major control points such as alarms, sensors, valves and treatment units; design calculations on the expected treatment performance including removal efficiency, carbon consumption calculations including unit height and surface area, and the manufacturer's specifications on major components of the treatment system. The applicant must also provide a basis for all design calculations and properly reference all design assumptions in order for calculations to be replicated. Also, include a discussion on the need for iron treatment to address iron scaling and/or iron bacteria buildup. All plans and specifications on all treatment systems must be signed and certified by a professional engineer registered in the State of Rhode Island.
- b. The application must identify each applicable treatment unit proposed for use, examples include: Oil/Water Separator, Granular Activated Carbon (GAC), Air Stripping, U/V Oxidation, Iron Treatment, Filtration, Ion Exchange, Bag Filters, Equalization Tanks, Air Strippers, Chlorination, Dechlorination, and/or other additional equipment that is not listed. If the system consists of GAC or Ion Exchange, provide time to carbon or resin exhaustion in days. If the system consists of air stripping, provide the air/water ratio.
- c. The applicant must provide the proposed treatment system design flowrate, the maximum system capacity and the average flow rate of the treatment system in gallons per minute.
- d. The application must indicate any chemical or additive the permittee intends to use or store that will be applied to effluent prior to discharge or may otherwise be present in discharge(s) from the site. Chemicals and additives include, but are not limited to the following: algacides/biocides, antifoams, coagulants, corrosion/scale inhibitors, disinfectants, flocculants, neutralizing agents, oxidants, oxygen scavengers, pH conditioners and bioremedial agents, including microbes.
 - i. Provide the following information for each chemical or additive:
 - a) Product name, chemical formula, and manufacturer of the chemical, additive or remedial agent;
 - b) Purpose or use of the chemical/additive;
 - c) Safety Data Sheet (SDS) and Chemical Abstracts Service (CAS) Registry number for each chemical/additive;
 - d) The frequency (hourly, daily, etc.), duration (hours, days), quantity (maximum and average), and method of application for the chemical/additive;
 - e) Any material compatibility risks for storage and/or use including the control measures used to minimize such risks; and
 - f) If available, the vendor's reported aquatic toxicity (NOAEL and/or LC50 in percent for aquatic organism(s)).
 - ii. Written rationale which demonstrates that the addition of such chemicals/additives:
 - a) Will not add any pollutants in concentrations which exceed permit effluent limitations;

- b) Will not exceed any applicable State water quality standard; and
 - c) Will not add any pollutants that would justify the application of permit conditions that are different from or absent in this permit; or
- iii. Upon authorization to discharge, chemicals and/or additives which have been specifically disclosed in the NOI may be discharged up to the frequency and level disclosed, provided that such discharge does not violate the conditions of this permit or applicable State water quality standards. The DEM may request additional information to provide authorization to discharge chemicals and/or additives, including but not limited to WET testing. If coverage of the discharge under the RGP has already been granted and the use of a chemical additive becomes necessary, the permittee must notify the DEM and obtain approval prior to using any chemical additives.

5. RECEIVING WATER INFORMATION

- a. The application must provide a description of the discharge pathway, including the names and the state waterbody identification numbers of the receiving waters.
- b. The application must include a detailed map which indicates the site location and location of the outfall(s) to the receiving water. For multiple discharges, number the discharges sequentially. For indirect discharges, indicate the location of the discharge to the indirect conveyance and the discharge to surface waters. The map must include the location and distance to the nearest sanitary sewer.
- c. The application must provide the state water quality classification of the receiving water.
- d. If the proposed discharge is to freshwaters, provide the reported or calculated seven-day ten-year low flow (7Q10) of the receiving water in cubic feet per second (cfs) and attach any calculation sheets used to support stream flow and dilution calculations.

6. INFLUENT CHARACTERIZATION

- a. Based on the analysis of the untreated influent, the applicant must indicate whether or not each listed pollutant is believed present or believed absent in the potential discharge. Sample dates and locations must be provided.
- b. For discharges where metals are believed present, the NOI must include the results of at least one (1) influent sample.

7. Any additional information that may be required by the DEM must be included as part of the NOI, if the Director determines that such information is reasonably necessary to determine whether or not to authorize the discharge under this permit.

8. OWNER/OPERATOR CERTIFICATION – The NOI must be signed by the operator(s) and owner(s) certifying under penalty of law that he/she has read and understands the conditions and terms of the above Remediation General Permit and that to the best of his or her knowledge and belief the information provided was true, accurate, and complete. The signatory must also certify that they are aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment for knowing violations.

9. HOW TO SUBMIT. A completed and signed NOI must be submitted to the following address by hard copy in accordance with the schedule in Part I.B.3, unless an electronic reporting tool becomes available. If DEM implements an electronic reporting tool, then all NOIs shall be submitted electronically using the system that DEM implements.

Rhode Island Department of Environmental Management
RIPDES Program
235 Promenade Street
Providence, Rhode Island 02908

10. DEFICIENT NOI. If any portion of the NOI does not meet one or more of the minimum requirements of this part, then the applicant will be notified in writing from DEM at any point within the review period. It is the responsibility of the applicant to make all required changes and resubmit the NOI. The review period will recommence upon the receipt of the revised NOI.

G. QUANTITATION LIMITS

All analyses of parameters under this general permit must comply with the *National Pollutant Discharge Elimination System (NPDES): Use of Sufficiently Sensitive Test Methods for Permit Applications and Reporting* rule. Only sufficiently sensitive test methods may be used for analyses of parameters under this general permit. The permittee shall assure that all testing required by this permit, is performed in conformance with methods listed in 40 CFR Part 136, unless otherwise stated in this permit or in the authorization. In accordance with 40 CFR Part 136, EPA approved analysis techniques, quality assurance procedures and quality control procedures shall be followed for all reports required to be submitted under the RIPDES program. These procedures are described in "Methods for the Determination of Metals in Environmental Samples" (EPA/600/4-91/010) and "Methods for Chemical Analysis of Water and Wastes" (EPA/600/4-79/020).

If after conducting the complete Method of Standard Additions analysis, the laboratory is unable to determine a valid result, the laboratory shall report "could not be analyzed". Documentation supporting this claim shall be submitted along with the monitoring report. If valid analytical results are repeatedly unobtainable, DEM may require that the permittee determine a method detection limit (MDL) for their effluent as outlined in 40 CFR Part 136, Appendix B.

Therefore, all sample results shall be reported by the laboratory as; an actual value, "could not be analyzed", less than the reagent water MDL, or less than an effluent specific MDL. The effluent specific MDL must be calculated using the methods outlined in 40 CFR Part 136, Appendix B. Samples which have been diluted to ensure that the sample concentration will be within the linear dynamic range shall not be diluted to the extent that the analyte is not detected. If this should occur, the analysis shall be repeated using a lower degree of dilution.

When calculating sample averages for reporting on discharge monitoring reports (DMRs):

1. "could not be analyzed" data shall be excluded, and shall not be considered as failure to comply with the permit sampling requirements;
2. results reported as less than the MDL shall be reported as zeros in accordance with the DMR instructions.

All pollutant testing conducted under this permit should meet the following quantitation limits.

Quantitation Limits (QLs)

<u>Parameter</u>	<u>QL (µg/l)</u>	<u>Parameter</u>	<u>QL (µg/l)</u>
Total Suspended Solids	5,000	Benzo (a) Anthracene	0.1
Total Residual Chlorine	10.0	Benzo (a) Pyrene	0.1
Cyanide	5.0	Benzo (b) Fluoranthene	0.1
Benzene	0.5	Benzo (k) Fluoranthene	0.1
Toluene	0.5	Chrysene	0.1
Ethylbenzene	0.5	Dibenzo (a,h) anthracene	0.1
Total Xylenes	0.5	Indeno (1,2,3-cd) Pyrene	0.1
Total BTEX	0.5	Total Group II PAHs	0.5
Ethylene dibromide	0.05	Acenaphthene	0.5
MTBE	0.5	Acenaphthylene	0.5
Tert-Amyl Methyl Ether	0.5	Anthracene	0.5
Carbon Tetrachloride	0.5	Benzo (ghi) Perylene	0.5
1,4 Dichlorobenzene	0.5	Fluoranthene	0.5
1,2 Dichlorobenzene	0.5	Fluorene	0.5
1,3 Dichlorobenzene	0.5	Naphthalene	0.5
Total Dichlorobenzene	5.0	Phenanthrene	0.5
1,1 Dichloroethane	0.5	Pyrene	0.5
1,2 Dichloroethane	0.5	Total Polychlorinated Biphenyls	0.5
1,1 Dichloroethylene	0.5	Ammonia	100
Cis-1,2 Dichloroethene	0.5	Antimony	0.5
Dichloromethane	0.5	Arsenic	1.0
Tetrachloroethene	0.5	Cadmium	0.2
1,1,1 Trichloroethane	0.5	Chromium III	1.0
1,1,2 Trichloroethane	0.5	Chromium VI	1.0
Trichloroethylene	0.5	Copper	0.5
Vinyl Chloride	0.5	Lead	0.2
Acetone	10.0	Mercury	0.001
1,4 Dioxane	0.1	Nickel	0.2
Total Phenols	2.0	Selenium	2.0
Pentachlorophenol	5.0	Silver	0.2
Total Phthalates	3.0	Zinc	5.0
Bis (2-Ethylhexyl) Phthalate	0.5	Iron	20.0
Total Group I PAHs	0.5		

Part III: General Conditions of the Permit

- A. Duty to Comply. The permittee must comply with all conditions of this permit. Any permit noncompliance constitutes a violation of Chapter 46-12 of the Rhode Island General Laws and the Clean Water Act and is grounds for enforcement action which may include permit termination, revocation and reissuance, modification, or denial of a permit renewal application and the imposition of penalties.
1. The permittee shall comply with effluent standards or prohibitions established under Section 307(a) of the CWA for toxic pollutants within the time provided in the regulations that establish these standards or prohibitions, even if the permit has not yet been modified to incorporate this requirement.
 2. Section 309 of the CWA provides significant penalties for any person who violates a permit condition implementing Sections 301, 302, 306, 307, 308, 318 or 405 of the CWA or any permit condition or limitation implementing any such sections in a permit issued under Section 402 of the CWA. Any person who violates any condition of this permit is subject to a civil penalty of up to \$25,000 per day of such violation, as well as any other appropriate sanctions provided by Section 309 of the CWA. Section 309(c)(4) of the CWA provides that any person who knowingly makes any false material statement, representation, or certification in any record or other document submitted or required to be maintained under this permit, including reports of compliance or noncompliance shall, upon conviction, be punished by a fine of up to \$10,000 or by imprisonment of not more than two years, or by both.
 3. Chapter 46-12 of the Rhode Island General Laws provides that any person who violates a permit condition is subject to a civil penalty of not more than \$25,000 per day of such violation. Any person who willfully or negligently violates a permit condition is subject to a criminal penalty of not more than \$25,000 per day of such violation and imprisonment for not more than five (5) years, or both. Any person who knowingly makes any false statement in connection with the permit is subject to a criminal penalty of not more than \$5,000 for each instance of violation or by imprisonment for not more than thirty (30) days, or both.
- B. Continuation of the Expired General Permit. Provided the permittee has re-applied in accordance with paragraph C. below, an expired general permit continues in force and effect until a new general permit is issued. Only those facilities previously authorized to discharge under the expired permit are covered by the continued permit.
- C. Duty to Reapply. If the permittee wishes to continue an activity regulated by this permit after the expiration date of this permit, the permittee must comply with the conditions of Part I.B.7 of this permit, which states that following reissuance of this permit the permittee must comply with the Notice of Intent conditions of the new permit to maintain authorization to discharge.
- D. Need to Halt or Reduce Activity Not a Defense. It shall not be a defense for the permittee in an enforcement action that it would have been necessary to halt or reduce the permitted activity in order to maintain compliance with the conditions of this permit.
- E. Duty to Mitigate. The permittee shall take all reasonable steps to minimize or prevent any discharge in violation of this permit which has a reasonable likelihood of adversely affecting human health or the environment.
- F. Duty to Provide Information. The permittee shall furnish to the Department, within a reasonable time, any information which the Director may request to determine whether cause exists for modifying, revoking and reissuing, or terminating this permit, or to determine compliance with this permit. The permittee shall furnish to the Director any copies of records required to be kept by this permit.
- G. Signatory Requirements. All Notices of Intent, reports, certifications or information either submitted to the Director, or that this permit requires to be maintained by the permittee, shall be signed and certified in accordance with §1.12 of the RIPDES Regulations (See 250-RICR-150-10-1.12). Rhode Island General Laws, Chapter 46-12 provides that any person who knowingly makes any false statements, representation, or certification in any record or other document submitted or required to be maintained under this permit, including monitoring reports or reports of compliance or noncompliance shall, upon conviction, be punished by a fine of up to \$5,000 per violation, or by imprisonment for not more than thirty (30) days per violation, or by both.

- H. Oil and Hazardous Substance Liability. Nothing in this permit shall be construed to preclude the institution of any legal action or relieve the permittee from any responsibilities, liabilities, or penalties to which the permittee is or may be subject under Section 311 of the CWA.
- I. Release in Excess of Reportable Quantities. If a release in excess of reportable quantities occurs, the permittee must notify the Office of Water Resources immediately. This permit does not relieve the permittee of the reporting requirements of 40 CFR 117 and 40 CFR 302.
- J. Property Rights. The issuance of this permit does not convey any property rights of any sort, nor any exclusive privileges, nor does it authorize any injury to private property nor any invasion of personal rights, nor any infringement of Federal, State, or local laws or regulations.
- K. Severability. The provisions of this permit are severable, and if any provision of this permit, or the application of any provision of this permit to any circumstance, is held invalid, the application of such provision to other circumstances and the remainder of this permit shall not be affected thereby.
- L. Transfers. This permit is not transferable to any person except after notice to the Director. The Director may require the operator to apply for and obtain an individual permit, as stated in Part III.T of this permit.
- M. State Laws. Nothing in this permit shall be construed to preclude the institution of any legal action or relieve the permittee from any responsibilities, liabilities, or penalties established pursuant to any applicable state law.
- N. Proper Operations and Maintenance. The permittee shall at all times properly operate and maintain all facilities and systems of treatment and control (and related appurtenances) which are installed or used by the permittee to achieve compliance with the conditions of this permit. Proper operation and maintenance also includes adequate laboratory controls and appropriate quality assurance procedures. Proper operation and maintenance requires the operations of backup or auxiliary facilities or similar systems, installed by a permittee only when necessary to achieve compliance with the conditions of the permit.
- O. Monitoring and Records
1. Samples and measurements taken for the purpose of monitoring shall be representative of the volume and nature of the discharge over the sampling and reporting period.
 2. The permittee shall retain records of all monitoring including all calibration and maintenance records and all original strip chart recordings from continuous monitoring instrumentation, copies of all reports required by this permit, and records of all data used to complete the application for this permit, for a period of at least five (5) years from the date of the sample, measurement, report or application. This period may be extended by request of the Director at any time.
 3. Records of monitoring information shall include:
 - a. The date, exact place, and time of sampling or measurements;
 - b. The individual(s) who performed the sampling or measurements;
 - c. The date(s) analyses were performed;
 - d. The individual(s) who performed the analyses;
 - e. The analytical techniques or methods used; and
 - f. The results of such analyses.
 4. Monitoring must be conducted according to test procedures approved under 40 CFR 136 and applicable Rhode Island regulations, unless other test procedures have been specified in this permit.
 5. The CWA provides that any person who falsifies, tampers with, or knowingly renders inaccurate, any monitoring device or method required to be maintained under this permit shall upon conviction, be punished by a fine of up to \$10,000 per violation or by imprisonment for not more

than six months per violation, or by both. Chapter 46-12 of the Rhode Island General Laws also provides that such acts are subject to a fine of up to \$5,000 per violation, or by imprisonment for not more than thirty (30) days per violation, or by both.

6. Monitoring results must be reported on a Discharge Monitoring Report (DMR) in accordance with Part II.B.4 of the RGP.
7. If the permittee monitors any pollutants more frequently than required by this permit, using test procedures approved under 40 CFR 136, applicable State regulations, or as specified in this permit, the results of this monitoring shall be included in the calculation and reporting of the data submitted in the DMR.

P. Bypass of Treatment System

1. *Anticipated Bypass.* If the permittee knows in advance of the need for a bypass, he or she shall notify this Department in writing at least ten days prior to the date of the bypass. Such notice shall include the anticipated quantity and the anticipated effect of the bypass.
2. *Unanticipated Bypass.* The permittee shall submit notice of an unanticipated bypass. Any information regarding the unanticipated bypass shall be provided orally within twenty-four hours from the time the permittee became aware of the circumstances. A written submission shall also be provided within five days of the time the permittee became aware of the bypass. The written submission shall contain a description of the bypass and its cause; the period of the bypass, including exact dates and times, and if the bypass has not been corrected, the anticipated time it is expected to continue; and steps taken or planned to reduce, eliminate and prevent reoccurrence of the bypass.
3. *Prohibition of Bypass*
 - a. Bypass is prohibited and enforcement action against the permittee may be taken for the bypass unless:
 1. The bypass was unavoidable to prevent loss of life, personal injury or severe property damage;
 2. There were no feasible alternatives to the bypass, such as the use of auxiliary treatment facilities, retention of untreated waste, or maintenance during normal periods of equipment downtime. This condition is not satisfied if the permittee should, in the exercise of reasonable engineering judgement, have installed adequate backup equipment to prevent a bypass which occurred during normal periods of equipment downtime or preventative maintenance; and
 3. The permittee submitted notices as required in paragraphs 1 and 2 above.
 - b. The Director may approve an anticipated bypass after considering its adverse effects, if the Director determines that it will meet the three conditions of paragraph 3a, above.

Q. Upset Conditions

1. An upset constitutes an affirmative defense to an action brought for noncompliance with technology-based permit limitations if the requirements of paragraph 2 are met. No determination made during administrative review of claims that noncompliance was caused by upset, and before an action for noncompliance, is final administrative action subject to judicial review.
2. A permittee who wishes to establish an affirmative defense of an upset shall demonstrate, through properly signed, contemporaneous operating logs, or other relevant evidence, that:
 - a. An upset occurred, and the permittee can identify the specific causes(s) of the upset;
 - b. The permitted facility was at the time being properly operated;

- c. The permittee submitted notice of the upset as required in 250-RICR-150-05 §1.14(R); and
 - d. The permittee complied with any remedial measures required under 250-RICR-150-05 §1.14(E).
3. In any enforcement proceeding, the permittee seeking to establish the occurrence of an upset has the burden of proof.
- R. Inspection and Entry. The permittee shall allow the Director or an authorized representative of DEM, upon presentation of credentials and other documents as may be required by law, to:
1. Enter upon the permittee's premises where a regulated facility or activity is located or conducted or where records must be kept under the conditions of this permit;
 2. Have access to and copy at reasonable times any records that must be kept under the conditions of this permit;
 3. Inspect at reasonable times any facilities, equipment, or operations regulated or required under this permit; and
 4. Sample or monitor any substances or parameters at any location, at reasonable times, for the purposes of assuring permit compliance or as otherwise authorized by the CWA or Rhode Island General Law.
- S. Permit Actions. This permit may be modified, revoked and reissued, or terminated for cause, including but not limited to: violation of any terms or conditions of this permit; obtaining the permit by misrepresentation or failure to disclose all relevant facts; or a change in any condition that requires either a temporary or permanent reduction or elimination of the authorized discharge. The filing of a request by the permittee for a permit modification, revocation and reissuance, or termination, or a notification of planned changes or anticipated noncompliance does not constitute a stay of any permit condition.
- T. Requiring an Individual Permit
1. The Director may require any owner or operator authorized to discharge under this permit to apply for and obtain an individual permit. Any interested person may petition the Director to take action under this paragraph. The Director may determine at his or her own discretion that an individual permit is required.
 2. Any owner or operator authorized to discharge by this permit may request to be excluded from coverage of this permit by applying for an individual permit. The owner or operator shall submit an individual application (Form 1 and Form 2D or Form 2C) with reasons supporting the request to the Director. The request may be granted, if the reasons cited by the owner or operator are adequate to support the request. The Director shall notify the permittee within a timely fashion as to whether or not the request has been granted.
 3. If a permittee requests or is required to obtain coverage under an individual permit, then authorization to discharge under this permit shall automatically be terminated on the date of issuance of the individual permit. Until such time, this permit shall remain fully in force.
- U. Reopener Clause. The Director reserves the right to make appropriate revisions to this permit in order to incorporate any appropriate effluent limitations, schedules of compliance, or other provisions which may be authorized under the CWA or State Law. In accordance with §1.16 and §1.24 of the RIPDES regulations (See 250-RICR-150-10-1), if any effluent standard or prohibition, or water quality standard is promulgated under the CWA or under State Law which is more stringent than any limitation on the pollutants limited in this permit, or controls pollutants not limited in the permit; then the Director may promptly reopen the permit and modify or revoke and reissue the permit to conform to the applicable standard.
- V. Availability of Reports. Except for data determined to be confidential under Part II.U. below, all reports prepared in accordance with the terms of this permit shall be available for public inspection at the DEM at 235 Promenade Street, Providence Rhode Island. As required by the CWA, effluent data shall not be considered confidential. Knowingly making any false statement on any such report may result in the imposition of criminal penalties as provided for in Section 309 of the CWA and under section 46-12-14 of the Rhode Island

W. Confidentiality of Information

1. Any information submitted to DEM pursuant to these regulations may be claimed as confidential by the submitter, consistent with Rhode Island General Law 38-2-2. Any such claim must be asserted at the time of the submission in the manner prescribed on the application form or instructions or, in the case of other submissions, by stamping the words "confidential business information" on each page containing such information. If no claim is made at the time of submission, DEM may make the information available to the public without further notice.
2. Claims of confidentiality for the following information will be denied:
 - a. The name and address of any permit application or permittee;
 - b. Permit applications, permits and any attachments thereto; and
 - c. RIPDES effluent data.

- X. Right to Appeal. Within thirty (30) days of receipt of notice of final authorization, the permittee or any interested person may submit a request to the Director for an adjudicatory hearing to appeal the decision to be covered under the general permit. The request for a hearing must conform to the requirements of §1.50 of the RIPDES Regulations (See 250-RICR-150-10 §1.50).

**Attachment A
PFAS Analyte List**

Target Analyte Name	Abbreviation	CAS Number
Perfluoroalkyl carboxylic acids		
Perfluorobutanoic acid	PFBA	375-22-4
Perfluoropentanoic acid	PFPeA	2706-90-3
Perfluorohexanoic acid	PFHxA	307-24-4
Perfluoroheptanoic acid	PFHpA	375-85-9
Perfluorooctanoic acid	PFOA	335-67-1
Perfluorononanoic acid	PFNA	375-95-1
Perfluorodecanoic acid	PFDA	335-76-2
Perfluoroundecanoic acid	PFUnA	2058-94-8
Perfluorododecanoic acid	PFDoA	307-55-1
Perfluorotridecanoic acid	PFTriDA	72629-94-8
Perfluorotetradecanoic acid	PFTeDA	376-06-7
Perfluoroalkyl sulfonic acids		
Acid Form		
Perfluorobutanesulfonic acid	PFBS	375-73-5
Perfluoropentansulfonic acid	PFPeS	2706-91-4
Perfluorohexanesulfonic acid	PFHxS	355-46-4
Perfluoroheptanesulfonic acid	PFHpS	375-92-8
Perfluorooctanesulfonic acid	PFOS	1763-23-1
Perfluorononanesulfonic acid	PFNS	68259-12-1
Perfluorodecanesulfonic acid	PFDS	335-77-3
Perfluorododecanesulfonic acid	PFDoS	79780-39-5
Fluorotelomer sulfonic acids		
1H,1H, 2H, 2H-Perfluorohexane sulfonic acid	4:2FTS	757124-72-4
1H,1H, 2H, 2H-Perfluorooctane sulfonic acid	6:2FTS	27619-97-2
1H,1H, 2H, 2H-Perfluorodecane sulfonic acid	8:2FTS	39108-34-4
Perfluorooctane sulfonamides		
Perfluorooctanesulfonamide	PFOSA	754-91-6
N-methyl perfluorooctanesulfonamide	NMeFOSA	31506-32-8
N-ethyl perfluorooctanesulfonamide	NEtFOSA	4151-50-2
Perfluorooctane sulfonamidoacetic acids		
N-methyl perfluorooctanesulfonamidoacetic acid	NMeFOSAA	2355-31-9
N-ethyl perfluorooctanesulfonamidoacetic acid	NEtFOSAA	2991-50-6
Perfluorooctane sulfonamide ethanols		
N-methyl perfluorooctanesulfonamidoethanol	NMeFOSE	24448-09-7
N-ethyl perfluorooctanesulfonamidoethanol	NEtFOSE	1691-99-2
Per- and Polyfluoroether carboxylic acids		
Hexafluoropropylene oxide dimer acid	HFPO-DA	13252-13-6
4,8-Dioxa-3H-perfluorononanoic acid	ADONA	919005-14-4
Perfluoro-3-methoxypropanoic acid	PFMPA	377-73-1
Perfluoro-4-methoxybutanoic acid	PFMBA	863090-89-5
Nonafluoro-3,6-dioxaheptanoic acid	NFDHA	151772-58-6
Ether sulfonic acids		
9-Chlorohexadecafluoro-3-oxanonane-1-sulfonic acid	9Cl-PF3ONS	756426-58-1
11-Chloroeicosafluoro-3-oxaundecane-1-sulfonic acid	11Cl-PF3OUdS	763051-92-9
Perfluoro(2-ethoxyethane)sulfonic acid	PFEESA	113507-82-7
Fluorotelomer carboxylic acids		

Target Analyte Name	Abbreviation	CAS Number
3-Perfluoropropyl propanoic acid	3:3FTCA	356-02-5
2H,2H,3H,3H-Perfluorooctanoic acid	5:3FTCA	914637-49-3
3-Perfluoroheptyl propanoic acid	7:3FTCA	812-70-4



**RHODE ISLAND POLLUTANT DISCHARGE
ELIMINATION SYSTEM (RIPDES)
REMEDATION GENERAL PERMIT
NOTICE OF INTENT (NOI)**
(revised 04/24)

DEM USE ONLY
Date Received
Amount Received \$
RIPDES# **RIG**
Approval Date
Data Entry Date
Data Entry Initials
Data Group Number: G2A, G2B, G3A

I. OWNER			
Formal Name:			
Mailing Address:			
City:	State:	Zip:	Phone: ()
Contact Person:		Title:	
Email Address of Owner:			
II. OPERATOR (if different from owner)			
Formal Name:			
Mailing Address:			
City:	State:	Zip:	Phone: ()
Contact Person:		Title:	
Email Address of Facility Contact Person:			
III. SITE INFORMATION			
<p>a. Please include the following items as part of the NOI: brief history of the site, the source of contamination; a description of the proposed remedial and/or dewatering activity creating the discharge; all available analytical data on impacted groundwater; a site plan showing location of monitoring and recovery wells, discharge point, and receiving waters; and an 8.5" x 11" photocopy of a USGS 1:24,000 topographic map depicting site location.</p>			
Facility/Site Name:			
Facility/Site: Latitude:	Longitude:	SIC code(s) — Primary:	Other:
Facility Type of Ownership: <input type="checkbox"/> Federal <input type="checkbox"/> State <input type="checkbox"/> Private <input type="checkbox"/> Other Entity (specify):			
Facility Address:			
City:	State:	Zip:	
Type of Spill or Release:		Approximate Duration of Project:	
<p>b. Has a prior NPDES permit been granted for the discharge? Yes ___ No ___, if yes number: _____</p> <p>c. Has a prior NPDES application (Form 1 & 2C) ever been filed for the discharge? Yes ___ No ___, if yes provide date of application and application number if available.</p> <p>d. Is the site/facility covered by any other DEM permit including: 1. multi-sector storm water general permit, 2. phase I or II construction storm water general permit, 3. Individual RIPDES Permit, if so please list them below: _____</p> <p>e. Is the site/facility subject to any other DEM permitting or other action which is causing the generation of the discharge? Yes ___ or No ___</p> <p>If "Yes" please list the applicable permit numbers and DEM contacts here: _____</p>			

IV. DISCHARGE INFORMATION

a. Describe the discharge activities for which the owner/applicant is seeking coverage:

b. Provide the following information for each discharge:

Number of Discharge Points: _____

Maximum Flow Rate (cubic feet per second): _____ Is the maximum flow a design value? Y__ N__

Average Flow Rate (cubic feet per second): _____

c. Latitude and Longitude of the center of each outfall: pt. 1: lat. _____ long. _____, pt.2 lat. _____ long. _____, pt.3 lat. _____ long. _____, pt.4 lat _____ long _____, pt.5 lat _____ long _____, pt. 6 lat _____ long. _____.

d. If hydrostatic testing, total volume of the discharge (gallons):

e. Is the discharge intermittent ___ or seasonal___?

f. Expected dates of discharge (mm/dd/yy): Start: ___/___/___ End: ___/___/___

g. Based on the analysis of sample(s) of the untreated influent, the applicant must check the box of the sub-categories that the potential discharge falls within:

- A) Gasoline Only, B) Fuel Oils (and Other Oils) Sites, C) Petroleum Sites Containing Other Pollutants
 D) VOC Only Sites, E) VOC Sites Containing Other Contaminants F) Sites Containing Primarily Metals
 G) Contaminated Construction Dewatering,
 H) Aquifer Pump Testing, Well Development, or Rehabilitation of Contaminated Wells
 I) Hydrostatic Testing of Pipelines and Tanks J) Contaminated Sump Discharge

V. TREATMENT SYSTEM INFORMATION

a. **Attach a complete description of the treatment system including:** a flow schematic depicting all major control points (i.e., alarms, sensors, valves) and treatment units; design calculations on the expected treatment performance (i.e., removal efficiency, carbon consumption calculations) including unit height and surface area; and manufacturers' specifications on major components of the treatment system. Also provide a basis for all design calculations and properly reference all design assumptions in order for calculations to be replicated. Include a discussion on the need for iron treatment to address iron scaling and/or iron bacteria build-up. Plans and specifications on all treatment systems must be signed and certified by a professional engineer registered in the State of Rhode Island.

b. Identify each applicable treatment unit (check all that apply):

- Oil/Water Separator, Granular Activated Carbon, Air Stripping, U/V Oxidation, Iron Treatment,
 Filtration, Ion Exchange, Bag Filter, Equalization Tanks, Air Stripper, Chlorination, Dechlorination,
 Other (please specify): _____

If system consists of GAC or Ion Exchange, provide time to carbon or resin exhaustion (days):

If system consists of air stripping, provide air/water ratio:

c. Treatment System Design Flow (gpm):

d. Treatment System Maximum System Capacity (gpm):

e. Average Flow Rate of Treatment System (gpm):

f. Chemical and Additive Information:

(1) Indicate the type(s) of chemical or additive that will be applied to effluent prior to discharge or that may otherwise be present in the discharge(s): (check all that apply)

- Algaecides/biocides Antifoams Coagulants Corrosion/scale inhibitors Disinfectants Flocculants
 Neutralizing agents Oxidants Oxygen scavengers pH conditioners Bioremedial agents, including microbes Chlorine or chemicals containing chlorine Other; if so, specify:

(2) Provide the following information for each chemical/additive, using attachments, if necessary:

- a. Product name, chemical formula, and manufacturer of the chemical/additive;
- b. Purpose or use of the chemical/additive or remedial agent;
- c. Material Safety Data Sheet (MSDS) and Chemical Abstracts Service (CAS) Registry number for each chemical/additive;
- d. The frequency (hourly, daily, etc.), duration (hours, days), quantity (maximum and average), and method of application for the chemical/additive;
- e. Any material compatibility risks for storage and/or use including the control measures used to minimize such risks; and
- f. If available, the vendor's reported aquatic toxicity (NOAEL and/or LC50 in percent for aquatic organism(s)).

VI. RECEIVING WATER INFORMATION

a. Identify the discharge pathway: Direct, Indirect, Storm Drain, River/brook, Wetlands,
 Other (describe): _____

b. Provide a narrative description of the discharge pathway, including the names of the receiving waters:

c. Attach a detailed map(s) indicating the site location and location of the outfall to the receiving water:

1. For multiple discharges, number the discharges sequentially.
2. For indirect discharges, indicated the location of the discharge to the indirect conveyance and the discharge to surface waters. The map should include the location and distance to the nearest sanitary sewer.

d. Provide the Water Quality Classification of the receiving water: _____.

e. If the proposed discharge is to freshwaters, provide the reported or calculated seven day-ten year low flow (7Q10) of the receiving water for the point of discharge in cubic feet per second (cfs):
_____. Attach any calculation sheets used to support stream flow and dilution calculations.

f. Is the receiving water a listed 303(d) water quality impaired or limited water? Yes No, If yes for which pollutant(s)?:

g. Is there a TMDL? Yes No If Yes, for which pollutants?

VII. INFLUENT CHARACTERIZATION (attach raw analytical data, include sample date and location)

Pollutant	Believed Absent (Y/N)	Believed Present (Y/N)	Sample Type And Number	Test Method Minimum Level	Average (ug/l)	Max. (ug/l)	Design (ug/l)
Ammonia							
Ethanol							
Total Suspended Solids							
Total Residual Chlorine							
Total Petroleum Hydrocarbons							
Cyanide							
Benzene							
Toluene							
Ethylbenzene							
Total Xylenes (m,p,o)							
Total BTEX							
Ethylene dibromide							
Methyl-t-Butyl Ether (MTBE)							
Tert-Amyl Methyl Ether							
Carbon Tetrachloride							
1,4 Dichlorobenzene							
1,2 Dichlorobenzene							
1,3 Dichlorobenzene							
Total Dichlorobenzene							
1,1 Dichloroethane							
1,2 Dichloroethane							
1,1 Dichloroethylene							
cis - 1,2 Dichloroethylene							
Dichloromethane							
Tetrachloroethylene							
1,1,1 Trichloroethane							
1,1,2 Trichloroethane							
Trichloroethylene							
Vinyl Chloride							
Acetone							
1,4 Dioxane							
Total Phenols							
Pentachlorophenol							
Total Phthalates							

VII. INFLUENT CHARACTERIZATION (attach raw analytical data, include sample date and location)							
Pollutant	Believed Absent (Y/N)	Believed Present (Y/N)	Sample Type And Number	Test Method Minimum Level	Average (ug/l)	Max. (ug/l)	Design (ug/l)
Bis (2-Ethylhexyl) Phthalate							
Total Group I PAHs							
Benzo (a) Anthracene							
Benzo (a) Pyrene							
Benzo (b) Fluoranthene							
Benzo (k) Fluoranthene							
Chrysene							
Dibenzo (a,h) anthracene							
Indeno (1,2,3-cd) Pyrene							
Total Group II PAHs							
Acenaphthene							
Acenaphthylene							
Anthracene							
Benzo (ghi) Perylene							
Fluoranthene							
Fluorene							
Naphthalene							
Phenanthrene							
Pyrene							
Total Polychlorinated Biphenyls							
Antimony							
Arsenic							
Cadmium							
Chromium III (trivalent, total recoverable)							
Chromium VI (hexavalent, total recoverable)							
Copper							
Lead (total recoverable)							
Mercury							
Nickel (total recoverable)							
Selenium							
Silver							
Zinc (total recoverable)							
Iron (total recoverable)							
PFAS Analytes (attach results in a separate table)							
Other (describe):							

VIII. OWNER/OPERATOR CERTIFICATION

I certify under penalty of law that I have read and understood all terms and conditions of the above-referenced General Permit. I also certify under penalty of law that this document and all attachments were prepared under the direction or supervision in accordance with a system design to assure that qualified personnel properly gather and evaluate the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of a fine and imprisonment for knowing violations.

Print Owner's Name: _____

Print Owner's Title: _____

Signature: _____ Date: _____

Print Operator's Name: _____

Print Operator's Title: _____

Signature: _____ Date: _____



RHODE ISLAND DEPARTMENT OF ENVIRONMENTAL MANAGEMENT

Office of Water Resources



INSTRUCTIONS FOR THE RI POLLUTANT DISCHARGE ELIMINATION SYSTEM (RIPDES) NOTICE OF INTENT (NOI) FOR THE REMEDIATION GENERAL PERMIT (RGP)

(Revised 04/24)

WHO MUST FILE A NOTICE OF INTENT (NOI) FORM

Discharges of treated wastewaters, associated with the activities listed in Part I.A of the RGP, to Waters of the State are prohibited without a RIPDES permit. The owner or operator of these activities must submit a NOI to obtain coverage under the RIPDES RGP. If you have questions about whether you need a permit under the RIPDES program, contact the Rhode Island Department of Environmental Management, Office of Water Resources at (401) 222-4700.

An originally signed hard copy NOI form must be sent to the below address, unless an electronic reporting tool becomes available during the period covered under this permit. If DEM implements an electronic reporting tool, then all NOIs shall be submitted electronically using the system that DEM implements.

RIDEM – Office of Water Resources

RIPDES Program
235 Promenade Street
Providence, Rhode Island 02908

Please be sure to keep a copy for your files.

FEES

If the discharge was not previously authorized under the RIPDES program, a \$400 non-refundable fee is required to be submitted. Please follow the directions on the Application Fee Form (available online at <http://www.dem.ri.gov/programs/benviron/water/permits/rripdes/pdfs/apfeenew.pdf>). Note that all facilities are subject to an annual fee in accordance with the *Rules and Regulations Governing the Establishment of Various Fees* (available online at: <http://www.dem.ri.gov/pubs/regs/regs/water/feereg07.pdf>).

COMPLETING THE FORM

You must type or print in the appropriate areas only. Abbreviate if necessary to save space.

SECTION I – OWNER

Give the legal name of the person, firm, public, municipal

organization, or any other entity that owns the site described in this application. The name of the owner may or may not be the same as the name of the site. Enter the complete address, telephone number and email address of the owner/contact person and title. Check the appropriate choice indicating if the owner is a Federal, State/Tribal, Private, or other entity (e.g. Corporation, County Government, District, Mixed Ownership (Public/Private), Municipal or Water District, Municipality, Non-Government, School District, etc.).

SECTION II – OPERATOR

Complete this section only if the Operator is different from the Owner. Give the legal name of the person, firm, public (municipal) organization or any other entity that has day-to-day operations of the site described in this application. Please provide complete mailing address city, state, and zip of the operator. Also, include the contact person, title, and email address.

SECTION III - SITE INFORMATION

a. Include the following items as part of the NOI: a brief history of the site, the source of contamination, a description of the proposed remedial and/or dewatering activity creating the discharge, all available analytical data on impacted groundwater, a site plan showing location of monitoring and recovery wells, discharge point and receiving water, and an 8.5" x 11" photocopy of a USGS 1:24,000 topographic map (or equivalent map) depicting the site location.

Provide the facility/site name, latitude and longitude (in decimal degrees in WGS84 coordinate system) and SIC code(s). Provide the facility/site location (address, city, state, and zip) and phone number. State the type of spill or release pertaining to this NOI and the approximate duration of the project.

b. For the site in which the application is being submitted indicate where a prior RIPDES permit has been granted for the discharge. Yes or No. If yes, provide the RIPDES permit number.

c. For the site in which the application is being

submitted indicate whether a prior RIPDES application has ever been filed for the discharge. Yes or No. If yes, provide the date of the application filed and application number, if available.

- d. For the site in which the application is being submitted indicate whether the site/facility is covered by any other DEM permit including, but not limited to: Multi-Sector Industrial Stormwater General Permit (MSGP), Construction Stormwater General Permit (CGP), Individual RIPDES Permit, if so list them and provide permit numbers.
- e. For the site in which the application is being submitted indicate where the site/facility is subject to any other DEM permitting or other action, which is causing the generation of the discharge. Yes or No. If Yes, provide the applicable permit number and the DEM contact in the space provided.

SECTION IV - DISCHARGE INFORMATION

- a. Describe the discharge activities for which the owner/applicant is seeking coverage. Attach additional sheets if necessary.
- b. Provide the following information about each discharge: the number of discharge points and the maximum and average flow rate of the discharge in cubic feet per second. If the maximum flow is a design value, please indicate with a check mark.
- c. For each discharge, indicate latitude and longitude (in decimal degrees in WGS84 coordinate system) within 100 feet.
- d. If hydrostatic testing, state the total volume of the discharge in gallons.
- e. Indicate if the discharge is intermittent or seasonal.
- f. Provide the expected start and end dates of the discharge (month/day/year).
- g. Based on the analysis of sample(s) of the untreated influent, the applicant must check the box of the sub-categories that the potential discharge falls within.

SECTION V - TREATMENT SYSTEM INFORMATION

- a. Attach a complete description of the treatment system including a flow schematic depicting all major control points such as alarms, sensors, valves, and treatment units; design calculations on the expected treatment performance such as removal efficiency, carbon consumption calculations including unit height and surface area, and manufacturer's specifications on major components of the treatment system. Provide the basis for all design calculations and properly reference all design assumptions in order for calculations to be replicated. Also, include

a discussion on the need for iron treatment to address iron scaling and/or iron bacteria build-up. Please note that the plans and specifications on all treatment systems must be signed and certified by a professional engineer registered in the State of Rhode Island.

- b. Identify each applicable treatment unit, check all that apply: Oil/Water Separator, Granular Activated Carbon (GAC), Air Stripping, U/V Oxidation, Iron Treatment, Filtration, Ion Exchange, Bag Filter, Equalization Tanks, Air Stripper, Chlorination, Dechlorination, and/or other additional equipment that is not listed. If the system consists of GAC or Ion Exchange, provide time to carbon or resin exhaustion in days. In accordance with Part II.A.7.b of the RGP, if the treatment system includes either GAC or Ion Exchange, the time to exhaustion of the entire system must be greater than either then (10) days beyond the anticipated period of discharge or sixty (60) days, whichever is less. If the system consists of air stripping, provide air/water ratio.
- c-e In the corresponding space, provide the proposed treatment system design flow, maximum system capacity and average flow rate of the treatment system in gallons per minute (gpm).
- f. Describe any chemical additives being used, or planned to be used, in accordance with the requirements of Part II.F.4.d of the RGP and attach SDS sheets for each. Please provide information regarding the chemical composition of the additive(s), potential toxic effects, or other information to ensure that approval of the use of the additive(s) will not cause or contribute to a violation of State water quality standards. Approval of coverage under the RGP will constitute approval of the use of the chemical additive(s). If coverage of the discharge under the RGP has already been granted and the use of a chemical additive becomes necessary, the permittee must obtain written approval from the RIPDES Program prior to using any additives not identified in the original NOI.

SECTION VI - RECEIVING WATER INFORMATION

Determine the water body and if the receiving water body is impaired:

- Step 1: Go to: <https://dem.ri.gov/online-services/data-maps>
- Step 2: Select Environmental Resource Map.
- Step 3: Click on the "Layer List" button on the upper right-hand side of the map.
- Step 4: Activate the appropriate layer by selecting the "Surface Water" status box in the drop-down menu.

- Step 5: Search for the facility by entering the facility address in the search box in the upper left-hand corner of the map.
- Step 6: Find the ultimate receiving water and click on the receiving water body in the vicinity of the ultimate discharging point to obtain the necessary information to be entered into the NOI. Information regarding the receiving water body will be shown in a pop-up box on the screen, such as the name of the water body, water body ID number, TMDL status, and impaired water body status.

- Identify the discharge pathway by checking whether it is discharged directly to the receiving water, within the facility (e.g., indirectly through an on-site drainage point), to a storm drain, to a river or brook, to a wetland or other receiving body. If other, describe.
- Provide a narrative description of the discharge pathway, including the names of the receiving waters.
- Attach a detailed map(s) indicating the site location and location of the outfall to the receiving water. For multiple discharges, number the discharges sequentially. For indirect discharges, indicate the location of the discharge to the indirect conveyance and the discharge to surface waters. The map should also include the location and distance to the nearest sanitary sewer as well as a locus of nearby sensitive receptors, such as surface waters, drinking water supplies and wetland areas.
- Provide the water quality classification of the receiving water.
- If the proposed discharge is to freshwaters complete the attached 'Dilution Determination Worksheet' to determine the 7Q10 flow at the point of discharge by using either the 'RIPDES 7Q10 Policy', or the online USGS application StreamStats (<http://water.usgs.gov/osw/streamstats>) if not feasible via the 'RIPDES 7Q10 Policy'. Once the 7Q10 flow has been determined, use the following formula to calculate the dilution factor:

$$DF = \frac{\{(7Q10) + (Treatment\ System\ Design\ Flow)\}}{\{Treatment\ System\ Design\ Flow\}}$$

Please note that DEM shall use a dilution factor of one (1) for all discharges to saltwater bodies, lakes, ponds, and wetlands. DEM also reserves the right to specify the dilution factor to be used in a given watershed. If a point of discharge is located in a watershed without a USGS gage that StreamStats doesn't compile a report for, then one of the following

methods may be used to estimate the 7Q10:

- USGS Report 95-4299, *Low-Flow Characteristics of Selected Streams in Northern Rhode Island.*- This report uses an equation based on statistical methods to estimate the 7Q10 flow of selected streams with partial record stations. Flow data from an index station is required.
- USGS Report 93-4046, *Low-Flow Characteristics of Selected Streams in Rhode Island.*- This report provides an equation to estimate the 7Q10 flow at ungauged sites based on the drainage area and the distribution of geologic materials in the drainage area. The areas of the drainage basin underlain by coarse-grained stratified drift and underlain by till-covered bedrock are required to use this method.
- USGS Report 93-4092, *Effects of Surficial Geology, Lakes and Swamps, and Annual Water Availability of Low Flows of Streams in Central New England and Their Use in Low-Flow Estimation.* - This report contains equations to estimate the 7Q10 flow using information regarding surficial geology, area of swamps and lakes, mean basin elevation, mean runoff, main stream length channel, and drainage basin area.

These reports can be obtained by contacting the DEM.

- Is the receiving water a listed 303(d) water quality impaired or limited water? If yes, for which pollutants?
- Is there a TMDL? If so which pollutants?
- Are any listed or threatened or endangered species, or designated critical habitat in proximity to the discharge. If yes, please list.

SECTION VII - INFLUENT CHARACTERIZATION

- Based on the analysis of the untreated influent, the applicant must indicate where each listed chemical is believed present or believed absent in the potential discharge. Include the sample date and location. Attach additional sheets if necessary.
- For discharges where metals are believed present, indicate where any metals in the influent have a reasonable potential to exceed the effluent limit in Part II.E of the Remediation General Permit. If yes, which metals?
- For any metals which have reasonable potential to exceed the limits in Part II.E of the Remediation General Permit, provide the dilution factor applicable for metals.

- d. Look up the limit calculated at the corresponding dilution factor in Part II.E of the RGP. Do any of the metals in the influent have the potential to exceed the corresponding effluent limits in Part II.E (i.e. Is the influent concentration above the limit set at the calculated dilution factor). If yes, which metals?

SECTION VIII - OWNER/OPERATOR CERTIFICATION

The NOI must be signed by the operator and owner certifying under penalty of law that s/he has read and understands the conditions and terms of the RGP and that to the best of knowledge and belief the information reported was true, accurate and complete. The signatory(ies) are also aware that there are significant penalties for submitting false information, including the possibility of a fine and imprisonment for knowing violations. Print and sign your name. Also provide the date and title of signatory.



R.I. DEPARTMENT OF ENVIRONMENTAL MANAGEMENT
Office of Water Resources



APPLICATION FEE FORM

Please complete the information below and **submit this completed form and your check (payable to "R.I. General Treasurer") for \$400 directly to:**

Attention: Traci Pena
R.I. Department of Environmental Management
Office of Water Resources
235 Promenade Street
Providence, RI 02908

OWNER'S NAME: _____

SITE LOCATION: _____

APPLICATION TYPE: **RIPDES General Permit (Remediation) - \$400**

NOTE: The application and all accompanying documents, including a copy of this fee form and payment, should be submitted as a hard copy to the Office of Water Resources, RIPDES Program, 235 Promenade Street, Providence, RI 02908-5767, unless DEM implements an electronic reporting tool. If DEM implements an electronic reporting tool, then all application material shall be submitted electronically using the system that DEM implements, and the fee form and payment submitted as hard copy as instructed above.

Application review will be initiated only upon receipt of the complete application and fee.

FOR OFFICE USE ONLY

OWR Receipt Date: _____

Fee Amount Received: _____

Processor Initials: _____

Dilution Determination Worksheet for use with the RIPDES Remediation General Permit

Dilution Factor (DF)

A DF for sites that discharge to freshwater receiving waters in Rhode Island is calculated using the procedures as noted below. Alternate calculation methods for DFs may be acceptable if approved by the DEM. A DF for sites that discharge to saltwater receiving waters or non-flowing freshwater bodies (ponds or lakes) in Rhode Island is assumed to be 1:1, unless otherwise approved on a case-by-case basis by the DEM.

➤ **Determine 7Q10 (7 Day 10 Year Low Flow) using the ‘RIPDES 7Q10 Policy’:**

When determining the 7Q10 for calculating water quality-based effluent limits in a RIPDES permit, the following order of operations is required:

1. Determine if the discharge is to a stream with an active, inactive, or partial record USGS gauge station. This includes streams with impoundments or that are affected by groundwater pumping.
 - a. If the stream has an active, inactive, or partial record gauge, use the list below to find the 7Q10.

USGS station no.	Station name	Water Year	7Q10 (cfs)	Drainage Area (sq. miles)
ACTIVE STATIONS				
01109403	Ten Mile River @ East Providence	1988-2018	9.7	53.1
01111300	Nipmuc River Near Harrisville	1965-2018	0.05	16
01111500	Branch River @ Forestdale	1941-2018	11.48	91.2
01112500	Blackstone River @ Woonsocket	1930-2018	83.9	416
01113895	Blackstone River at Roosevelt Street @ Pawtucket, RI	2004-2018	84.3	474
01114000	Moshassuck River @ Providence	1965-2018	4.1	23.1
01114500	Woonasquatucket River @ Centerdale	1943-2018	6.1	38.3
01115098	Peeptoad Brook at Elmdale Rd. near North Scituate, RI	1995-2018	0.039	4.96
01115170	Moswansicut Stream near North Scituate, RI	2009-2018	0.08	3.25
01115187	Ponaganset River at South Foster, RI	1994-2018	0.062	14.4
01115265	Hemlock Brook at King Road near Foster, RI	2009-2018	0.04	8.72
01115276	Westconnaug Stream at Plainfield Pike, RI	2009-2018	1.2	5.18
01115630	Nooseneck River @ Nooseneck	2007-2018	1.3	8.23
01116000	South Branch Pawtuxet River @ Washington	1942-2018	16.1	63.8
01116500	Pawtuxet River @ Cranston	1941-2018	59.9	200

USGS station no.	Station name	Water Year	7Q10 (cfs)	Drainage Area (sq. miles)
01116905	Hunt River, 250 ft downstream of Fry Brook at Frenchtown, RI	2007-2018	1.5	16
01117000	Hunt River Near East Greenwich	1942-2018	1.5	23
01117350	Chipuxet River @ West Kingston	1973-2018	0.82	9.99
01117370	Queen River at Liberty Rd. at Liberty, RI	2007-2018	2.5	19.6
01117420	Usquepaug River Near Usquepaug	1975-2018	5.8	36.1
01117430	Pawcatuck River at Rt. 2 at Kenyon, RI	2007-2018	7.9	72.7
01117468	Beaver River Near Usquepaug	1976-2018	1.8	8.87
01117500	Pawcatuck River @ Wood River Junction	1942-2018	21.9	100
01117800	Wood River Near Arcadia	1965-2018	6.7	35.2
01118000	Wood River @ Hope Valley	1942-2018	17.8	72.4
01118500	Pawcatuck River @ Westerly	1942-2018	58	295
DISCONTINUED STATIONS				
01106000	Adamsville Brook at Adamsville, RI	1941-1978	0.06	8.01
01111400	Chepachet River at Chepachet, RI	1966-1972	2.28	17.4
01115630	Nooseneck River @ Nooseneck	1965-1981	1.32	8.23
01115770	Carr River Near Nooseneck	1965-1979	1.32	6.73
01117600	Meadow Brook Near Carolina	1967-1974	0.11	5.53
01126200	Bucks Horn Brook @ Greene	1967-1974	0.5	5.52
PARTIAL GAUGE STATIONS				
01111330	Clear River at Oakland, RI* (Burrillville WWTF)	1993-2003	2.4	45.4

* Note that the gauge station was downstream of the WWTF, the 7Q10 was calculated from upstream of the WWTF.

- b. Use the 7Q10 from the list and the drainage area ratios between the gauge station and the point of discharge to determine the 7Q10 for WQBEL calculations (to get the dilution factor).

This would be done with the following equation:

$$7Q10_{At\ your\ facility} = \left(\frac{Drainage\ Area_{At\ your\ facility}}{Drainage\ Area_{At\ the\ gauge}} \right) \cdot 7Q10_{At\ the\ gauge}$$

For example, if your facility was located on the Woonasquatucket River near Centerdale, and the drainage area for the watershed upstream of your facility was found to be 30 square miles, the 7Q10 would be calculated as follows:

$$7Q10_{At\ your\ facility} = \left(\frac{30\ Sq.\ Mi.}{38.3\ Sq.\ Mi.} \right) \cdot 6.1\ cfs$$

Which is equal to 4.8 cfs.

- c. If a facility with significant flow is upstream of the gauging station, subtract the average flow from the facility from the 7Q10 value calculated in Step 1.b.

For example, the Smithfield WWTF is located on the Woonasquatucket River, just upstream of the Centerdale gauge. Therefore, the average WWTF flow is subtracted from the value at the gauge. In this case, the average WWTF flow is 3.2 cfs, making the 7Q10 flow at your facility 1.6 cfs.

If there is no facility impacting the 7Q10 of the gauge, then the 7Q10 value from step 1.b does not need to be adjusted to account for this, and step 1.c is skipped.

2. If the stream is ungauged and/or not included on the list above, use StreamStats per the procedure below to determine the 7Q10 flow.
3. The above active gauge station 7Q10s are current including data through water year 2018. RIPDES policy states these values shall be updated every 10 years. Therefore, this list must be updated for more recent 7Q10 values in 2029, when data through water year 2028 becomes available.
 - a. In addition to updating the list for 7Q10 values, the USGS website should be consulted for the most up-to-date list of continuous active gauges in Rhode Island. Some gauges may now have at least 10 years of data to be included in this list that had been excluded previously.

➤ **Determine 7Q10 using StreamStats:**

1. Using StreamStats: This online application is appropriate for determining drainage area ratios for nearby gages and uses the 7Q10s for available gages from the U.S. Geological Gazetteer reports (1984 Wandle et al.). StreamStats is available at:

<http://water.usgs.gov/osw/streamstats>
2. Follow the instructions in StreamStats. The location chosen must be where the treated groundwater or other treated wastewater discharges to the receiving water body. When the location has been chosen and the basin delineated, select the “Low-Flow Statistics” for the Regression Based Scenario. Then click Continue. This will bring up the Build a

Report section. Again, click Continue.

3. Include a printout or otherwise attach the StreamStats Report with the Notice of Intent. An example StreamStats Report is included on the following page. The report should contain the 7 Day 10 Year Low Flow value for the selected location.

➤ **Calculate the Dilution Factor:**

1. Calculate the dilution factor. The 7Q10 was calculated in equation 1.b above using the RIPDES 7Q10 Policy or as printed on the StreamStats Report. Use the following formula:


$$DF = \frac{\{(7Q10) + (Treatment\ System\ Design\ Flow)\}}{\{Treatment\ System\ Design\ Flow\}} =$$

EXAMPLE STREAMSTATS REPORT:

StreamStats Report

Region ID:
 Workspace ID:
 Clicked Point (Latitude, Longitude):
 Time:

RI
 RI20180831155611140000
 41.99838, -71.57297
 2018-08-31 11:56:26 -0400

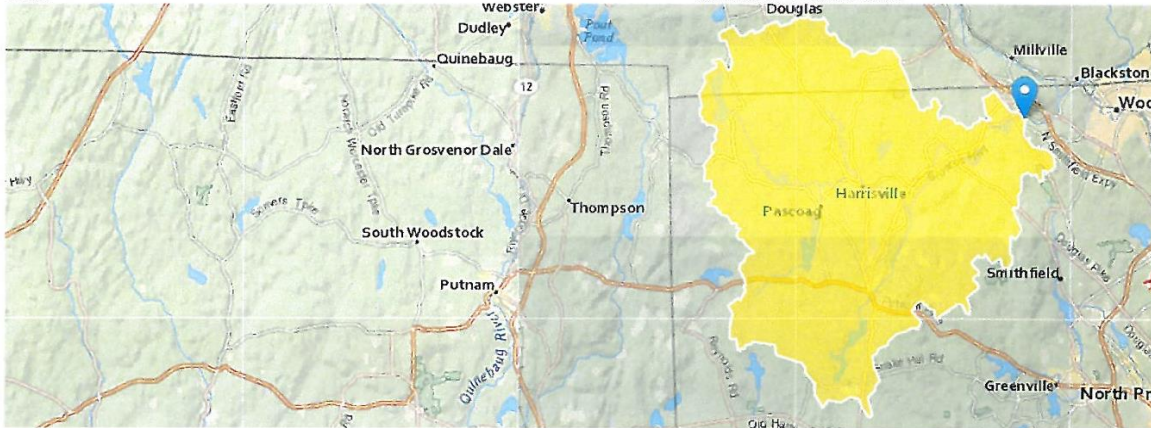

Basin Characteristics

Parameter Code	Parameter Description	Value	Unit
DRNAREA	Area that drains to a point on a stream	89.8	square miles
STRDENED	Stream Density -- total length of streams divided by drainage area, edited from NHD	2.21	miles per square mile

Low-Flow Statistics Parameters [100 Percent (89.8 square miles) Statewide Low Flow 2014 5010]

Parameter Code	Parameter Name	Value	Units	Min Limit	Max Limit
DRNAREA	Drainage Area	89.8	square miles	0.52	294
STRDENED	Stream Density Edited	2.21	miles per square mile	0.94	3.49

Low-Flow Statistics Flow Report [100 Percent (89.8 square miles) Statewide Low Flow 2014 5010]

PII: Prediction Interval-Lower, PIU: Prediction Interval-Upper, SEp: Standard Error of Prediction, SE: Standard Error (other -- see report)

Statistic	Value	Unit	PII	PIU
7 Day 2 Year Low Flow	18.9	ft ³ /s	4.08	87.4
7 Day 10 Year Low Flow	9.15	ft ³ /s	1.17	71.3

Low-Flow Statistics Citations

Bent, G.C., Steeves, P.A., and Waite, A.M., 2014, Equations for estimating selected streamflow statistics in Rhode Island: U.S. Geological Survey Scientific Investigations Report 2014-5010, 65 p. (<http://dx.doi.org/10.3133/sir20145010>)

USGS Data Disclaimer: Unless otherwise stated, all data, metadata and related materials are considered to satisfy the quality standards relative to the purpose for which the data were collected. Although these data and associated metadata have been reviewed for accuracy and completeness and approved for release by the U.S. Geological Survey (USGS), no warranty expressed or implied is made regarding the display or utility of the data for other purposes, nor on all computer systems, nor shall the act of distribution constitute any such warranty.

USGS Software Disclaimer: This software has been approved for release by the U.S. Geological Survey (USGS). Although the software has been subjected to rigorous review, the USGS reserves the right to update the software as needed pursuant to further analysis and review. No warranty, expressed or implied, is made by the USGS or the U.S. Government as to the functionality of the software and related material nor shall the fact of release constitute any such warranty. Furthermore, the software is released on condition that neither the USGS nor the U.S. Government shall be held liable for any damages resulting from its authorized or unauthorized use.



**RHODE ISLAND POLLUTANT DISCHARGE
ELIMINATION SYSTEM (RIPDES)
REMEDATION GENERAL PERMIT
NOTICE OF TERMINATION (NOT)**
(revised 04/24)

DEM USE ONLY
Date Received
Amount Received \$
RIPDES# **RIG**
Approval Date
Data Entry Date
Data Entry Initials

I. General Site Information. Please provide the following information about the site:			
a. Name of Facility/Site:			
b. Facility/Site address:			
c. RIPDES Permit Number:			
d. Photos documenting the capping or elimination of piping connecting the discharge to the receiving water, or other documentation that the treatment system has been removed from the site, must be provided as an attachment in order to process this permit termination request.			
II. Owner Information			
Legal Name:			
City:	State:	Zip:	Phone: ()
Contact Person:	Title:		
Email Address of Contact Person:			
III. Operator Information			
Legal Name:			
City:	State:	Zip:	Phone: ()
Contact Person:			
Email Address of Contact Person:			
IV. OWNER/OPERATOR CERTIFICATION			
<p>I certify under penalty of law that all discharges from the identified facility that are authorized by the "RIPDES Remediation General Permit" have been terminated. I understand that by submitting this Notice of Termination (NOT), I am no longer authorized to discharge waters covered by the RIPDES Remediation General Permit and that discharging pollutants from the activity covered by the RIPDES Remediation General Permit is unlawful under the Clean Water Act where the discharge is not authorized by a permit. I also understand that the submission of this NOT does not release an owner/operator from liability for any violation of the RIPDES Remediation General Permit or the Clean Water Act.</p>			
Print Owner's Name: _____			
Print Owner's Title: _____			
Signature: _____		Date: _____	
Print Operator's Name: _____			
Print Operator's Title: _____			
Signature: _____		Date: _____	

**This NOT form will not be accepted once an electronic reporting tool becomes available during the period covered under this permit.

**RHODE ISLAND POLLUTANT DISCHARGE ELIMINATION SYSTEM (RIPDES)
REMEDATION GENERAL PERMIT (RGP)
NOTICE OF TERMINATION (NOT)**

INSTRUCTIONS

In accordance with Part I.B.5 of the RGP, operators of facilities and/or operations authorized under this permit shall notify the DEM of the termination of discharge(s) authorized under the general permit. The NOT must be completed and submitted within thirty (30) days of the end of discharge(s).

A. Instructions for the NOT – The NOT requires the following information:

I. General Site Information

- a. Name of the facility.
- b. Address of the facility or site for which the notification is submitted.
- c. RIPDES Permit Number assigned in which the NOT is being submitted.
- d. Photos or other documentation that the piping connecting the discharge to the receiving water has been capped or eliminated, or the treatment system has been removed from the site. If this information is not received, your Termination application/ request will not be processed.

II. Owner Information

- a. Legal name of owner.
- b. Address of owner which includes the City, State, and Zip.
- c. Phone number of owner.
- d. The name of the contact person including their title.
- e. Email address of the contact person.

III. Operator Information

- a. Legal name and address of the entity who operates the facility.
- b. Contact name, title, address, telephone number and email address of the operators who runs the facility for the permit in which termination is being submitted.

IV. Owner/Operator Certification

Signature of the above responsible parties, owner and operator, submitting the NOT claiming that discharging activities are no longer taking place. Signing the NOT does not release the owner/operator from liability for any violation of the RIPDES Remediation General Permit or the Clean Water Act.

The original NOT must be sent by hard copy to 'RIDEM - Office of Water Resources – RIPDES Program – 235 Promenade Street, Providence, RI 02908', unless an electronic reporting tool becomes available during the period covered under this permit. If DEM implements an electronic reporting tool, then all NOTs shall be submitted electronically using the system that DEM implements.